

# Panel Mount Power Supply

## 12V 50W 1 Phase

### PMC-12V050W1AA



PMC-12V050W1AA

50Watts

Total Power: 50Watts  
 Input Voltage: 85-264Vac  
 # of Output: Single

<b>Model number</b>	<b>PMC-12V050W1AA</b>
<b>Reference no.</b>	<b>EOE11010186</b>
<b>OUTPUT (DC)</b>	
Output power	50W
Output voltage range	11-14V
Output current	4.17A (50W max.)
PARD (20MHz)	< 100mVpp (@ nominal values)
Start-up time	< 2500ms @ 100% load (25°C) and typical line input
Hold-up time	> 15ms @ 115Vac, > 80ms @ 230Vac with 50W load (25°C)
Rise time	< 30ms @ 100% load (25°C)
Line regulation	< 0.5% typical (@ 85 - 264Vac input, 100% load)
Load regulation	< 1% typical (@ 85 - 264Vac input, 0 to 100% load)
<b>INPUT (AC)</b>	
Input voltage range	85 - 264Vac
Input frequency	47 - 63Hz
Max. input current	1.5A max. (1.1 max. @ 115Vac, 0.7A max. @ 230Vac)
Inrush current limitation I <sup>2</sup> t (+25°C) typ.	< 30A @ 115Vac & 60A @ 230Vac
Efficiency	> 83% @ 115Vac & > 84% @ 230Vac
Leakage current	< 1mA @ 240Vac
<b>MECHANICAL DESIGN</b>	
Case cover	Aluminium (AL1100)
Dimensions (L x W x H)	128mm x 97mm x 38mm
Unit weight / box	0.260kg
MTBF	> 700,000 hrs
Noise	Sound pressure level (SPL) < 40dBA
Cooling	Convection
Input / output terminal	Terminal block 5 pin rated 300V/20A
Input / output wire	AWG22-14
Shock proof	IEC60068-2-27
Vibration	IEC60068-2-6




### Special Features

- Full aluminum casing for lightweight and corrosion resistant handling
- Universal AC input
- Overload protection
- Thermal protection
- MTBF: > 700,000 hrs.
- Efficiency > 84%
- Expected life time: 10 years
- 2 years warranty
- RoHS compliant



# Panel Mount Power Supply 12V 50W 1 Phase PMC-12V050W1AA

## MECHANICAL DRAWING

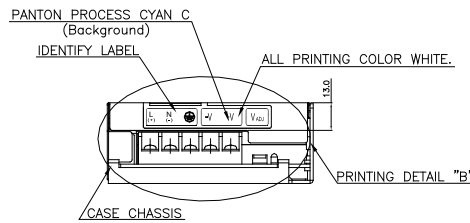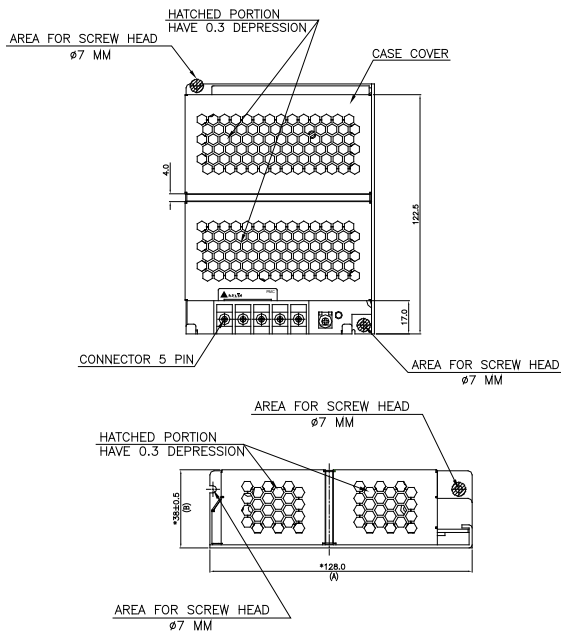

Delta Electronics (Thailand)  
Public Company Limited  
909 Moo 4, E.P.Z.,  
Bangpoo Industrial Estate,  
Tambon Prakasa, Amphur  
Muang Samutprakarn,  
Samutprakarn 10280, Thailand  
Tel: +662 709 2800  
Fax: +662 709 2827  
E-mail: VL@delta.co.th  
www.deltaenergysystems.com

## SAFETY / ENVIRONMENTAL

EMC / Emissions	FCC Title 47, Class B/EN55022;CISPR22, Class B
Immunity	EN 61000-4-2, 1995; EN61000-4-3, 1998; EN61000-4-4, 1995; IEC61000-4-5, 1995; EN61000-4-6, 1996; EN61000-4-8 or IEC61000-4-12 or IEEE C62.41; EN61000-3-2, 1994
Safety standard	UR/cUR recognized to UL60950-1 and CSA C22.2 No.60950-1; CB test certificate and report to IEC60950-1; CE (EMC and low voltage directive), TUV
Voltage dips	Conform to EN61000-4-11
Galvanic isolation	Input to output: 3KVac; Input to ground: 1.5KVac; Output to ground: 0.5KVac
Operating temperature	-10°C to +70°C *
Storage temperature	-25°C to +85°C
Operating humidity	< 95% RH non-condensing
Note (*)	* Operation to 70°C possible with a linear derating to half power from 50°C to 70°C