


## PLL Oscillator

### P/N: PLO3500

Frequency(MHz)	3500
Level(dBm)	+10
Phase Noise(dBc/Hz)	-100 @1KHz
Spurious(dBc)	-75
Frequency Stability(KHz)	±4 (-10°C ~ +70°C)
Power Supply(V/mA)	+12 / 160
Connector	SMA-Female
Operating Temperature(°C)	-10 ~ +70

### Outline Drawing (Size: mm)

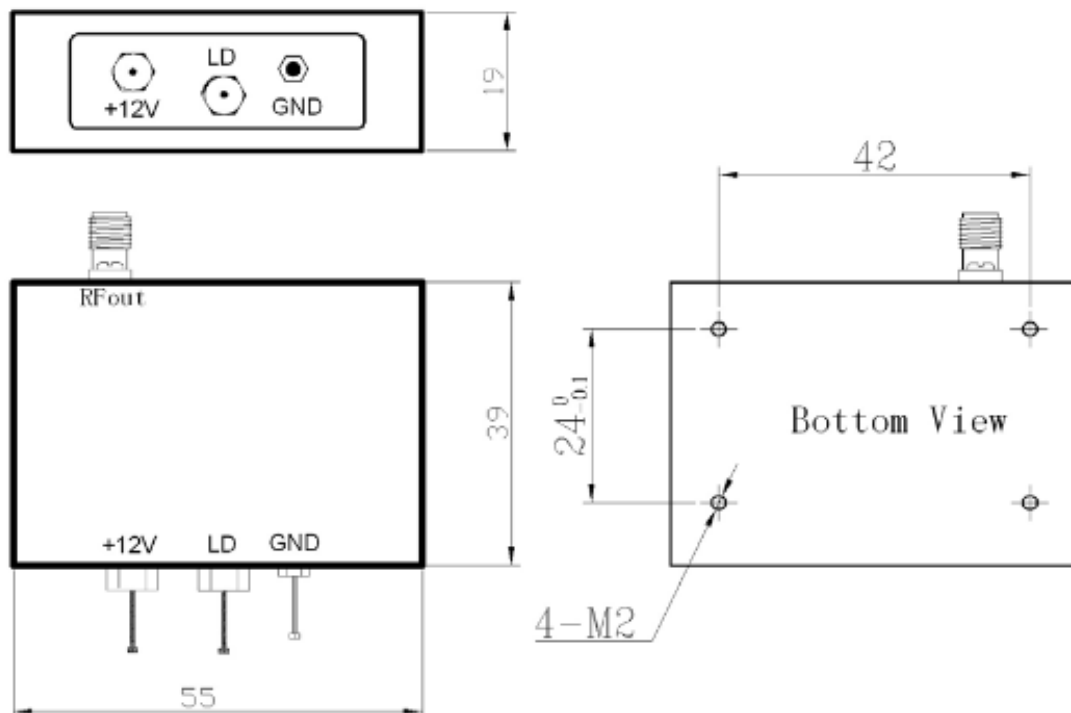

Data subject to change without notice. For current data sheets, please contact: [sales@aacix.com](mailto:sales@aacix.com)