



1. Dimensions:

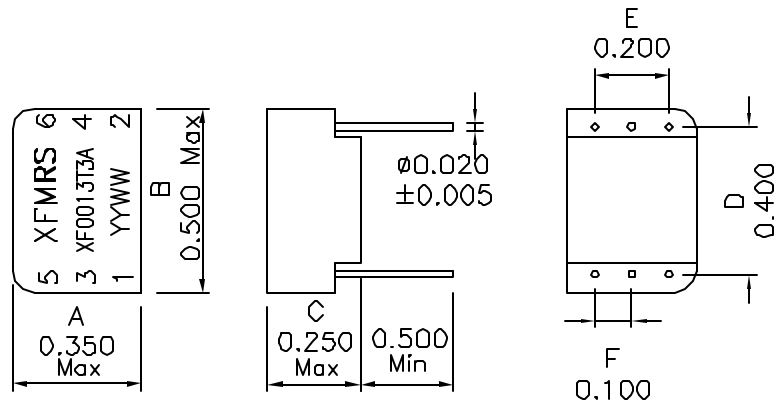

2. Schematic:



3. Electrical Specifications: @25°C

Isolation Voltage: 1500Vrms
 Turns Ratio: P2-6:P3-5:P1-3 1:1:0.26 ±10%
 PRI OCL: 1.5mH Min @100KHz 50mV
 PRI LL: 0.40uH Max @100KHz, 50mV SEC SHORTED
 PRI/SEC Cw/w: 40pF Max @100KHz 50mV
 DCR: P1-5 0.90 Ohms Max
 DCR: P2-6 0.70 Ohms Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV. A/3

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc www.XFMRS.com		Title: T1/CEPT/ISDN-PRI TRANSFORMERS	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010		P/N: XF0013T3A	REV. A
Dimensions in Inch		DWN. 李小锋	Feb-12-07
SCALE 2:1 SHT 1 OF 1		CHK. 廖玉坤	Feb-12-07
		APP. BW	Feb-12-07