

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION

**Part Number:** [0039299047](#)  
**Status:** **Active**  
**Overview:** [minifit\\_jr](#)  
**Description:** 4.20mm (.165") Pitch Mini-Fit Jr.™ Header, Dual Row, Vertical, with Snap-in Plastic Peg PCB Lock, 4 Circuits, PA Polyamide Nylon 6/6 94V-0, Tin (Sn) Plating, without Drain Holes

|                               |                                                         |
|-------------------------------|---------------------------------------------------------|
| <b>Documents:</b>             |                                                         |
| <a href="#">3D Model</a>      | <a href="#">Product Specification PS-5556-001 (PDF)</a> |
| <a href="#">Drawing (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>    |

**Agency Certification**


|     |           |
|-----|-----------|
| CSA | LR19980   |
| TUV | R72081037 |
| UL  | E29179    |

**General**

|                |                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Family | PCB Headers                                                                                                                                                                                                                                                                                                                                                                     |
| Series         | <a href="#">5566</a>                                                                                                                                                                                                                                                                                                                                                            |
| Application    | Wire-to-Board                                                                                                                                                                                                                                                                                                                                                                   |
| Comments       | Current = 13A max. per circuit when header is mated to a receptacle loaded with <a href="#">45750</a> Mini-Fit Plus HCS™ Crimp Terminal Crimped to to 16 AWG wire. . See Molex product specification PS-45750-001 for additional current de-rating information.. Glow Wire Equivalent Part Number <a href="#">50361702</a> , <a href="#">50362304</a> . Square Pin, Solder Type |
| Overview       | <a href="#">minifit_jr</a>                                                                                                                                                                                                                                                                                                                                                      |
| Product Name   | Mini-Fit Jr.™                                                                                                                                                                                                                                                                                                                                                                   |

**Physical**

|                                |          |
|--------------------------------|----------|
| Breakaway                      | No       |
| Circuits (Loaded)              | 4        |
| Circuits (maximum)             | 4        |
| Color - Resin                  | Natural  |
| Durability (mating cycles max) | 30       |
| First Mate / Last Break        | No       |
| Flammability                   | 94V-0    |
| Glow-Wire Compliant            | No       |
| Guide to Mating Part           | No       |
| Keying to Mating Part          | None     |
| Lock to Mating Part            | Yes      |
| Material - Metal               | Brass    |
| Material - Plating Mating      | Tin      |
| Material - Plating Termination | Tin      |
| Material - Resin               | Nylon    |
| Number of Rows                 | 2        |
| Orientation                    | Vertical |
| PC Tail Length (in)            | 0.138 In |
| PC Tail Length (mm)            | 3.50 mm  |
| PCB Locator                    | Yes      |
| PCB Retention                  | Yes      |
| PCB Thickness Recommended (in) | 0.062 In |
| PCB Thickness Recommended (mm) | 1.60 mm  |
| Packaging Type                 | Tray     |
| Pitch - Mating Interface (in)  | 0.165 In |

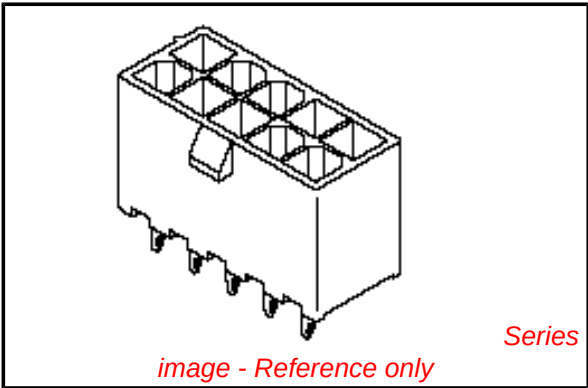

**EU RoHS**  
**ELV and RoHS**  
**Compliant**  
**REACH SVHC**  
Not Reviewed  
**Halogen-Free**  
**Status**  
**Halogen-Free**

**China RoHS**

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**  
[5566Series](#)

**Mates With**  
[5557](#) Mini-Fit Jr.™ Receptacle Housing

|                                |                 |
|--------------------------------|-----------------|
| Pitch - Mating Interface (mm)  | 4.20 mm         |
| Pitch - Term. Interface (in)   | 0.165 In        |
| Pitch - Term. Interface (mm)   | 4.20 mm         |
| Plating min: Mating (µin)      | 355.6           |
| Plating min: Mating (µm)       | 8.89            |
| Plating min: Termination (µin) | 355.6           |
| Plating min: Termination (µm)  | 8.89            |
| Polarized to Mating Part       | Yes             |
| Polarized to PCB               | Yes             |
| Shrouded                       | Fully           |
| Stackable                      | No              |
| Surface Mount Compatible (SMC) | No              |
| Temperature Range - Operating  | -40°C to +105°C |
| Termination Interface: Style   | Through Hole    |

**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 13A  |
| Voltage - Maximum             | 600V |

**Solder Process Data**

|                                                |                        |
|------------------------------------------------|------------------------|
| Duration at Max. Process Temperature (seconds) | 5                      |
| Lead-free Process Capability                   | Wave Capable (TH only) |
| Max. Cycles at Max. Process Temperature        | 1                      |
| Process Temperature max. C                     | 240                    |

**Material Info**


|                 |                 |
|-----------------|-----------------|
| Old Part Number | A-5566-04A2-210 |
|-----------------|-----------------|

**Reference - Drawing Numbers**

|                         |                 |
|-------------------------|-----------------|
| Packaging Specification | PK-5566-001     |
| Product Specification   | PS-5556-001     |
| Sales Drawing           | SDA-5566-N*2*-* |
| Test Summary            | TS-5556-002     |

This document was generated on 05/21/2010

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION

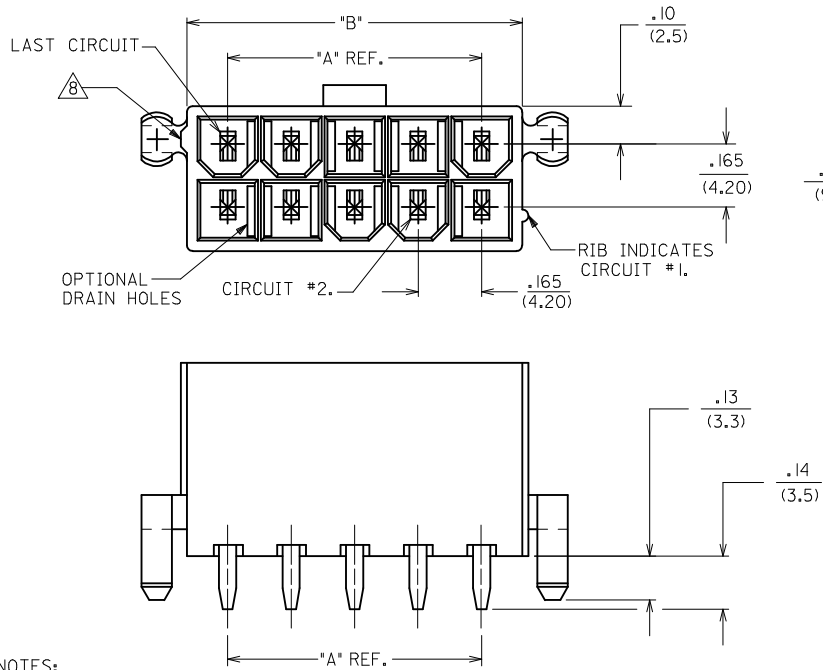

**NOTES:**

1) HOUSING MATERIAL:  
"BLANK" - NYLON 6/6, U.L. 94V-2, COLOR: NATURAL.  
210 - NYLON 6/6, U.L. 94V-0, COLOR: NATURAL.  
BL - NYLON 6/6, U.L. 94V-2, COLOR: DYED BLACK.

2) TERMINAL MATERIAL: BRASS ALLOY 260

3) PART MATES WITH MINI-FIT JR. RECEPTACLE #5557.

4) PACKAGING: SEE CHARTS

5) MOUNTING OPTIONS:  
"BLANK" - NO MOUNTING (SEE SD-5566-NA AND -NB SERIES DWGS.)  
2 - PEG MOUNT

6) TERMINAL PLATING:  
"BLANK" - .000035/(.00090) MIN. TIN OVER .000020/(.00050) MIN. COPPER.  
\*GS - .000030/(.00076) MIN. SELECT GOLD .000100/(.00254) MIN. SELECT MATTE TIN OVER .000050/(.00127) MIN. NICKEL OVERALL.  
\*GS2 - .000015/(.00038) MIN. SELECT GOLD AND .000100/(.00254) MIN. SELECT MATTE TIN OVER .000050/(.00127) MIN. NICKEL OVERALL.  
S - .000100/(.00254) MIN. TIN OVER .000050/(.00127) MIN. NICKEL.


\*THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC."  
\*CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD PLATING.

7) PRODUCT SPECIFICATION AND PROCESSING PARAMETERS: SEE PS-5556-001

8) ANTI-SHINGLING RIB MAY OR MAY NOT APPEAR ON HOUSINGS.

9) CONNECTORS ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.


10) PARTS ARE NOT DESIGNED FOR CURRENT SHARING.

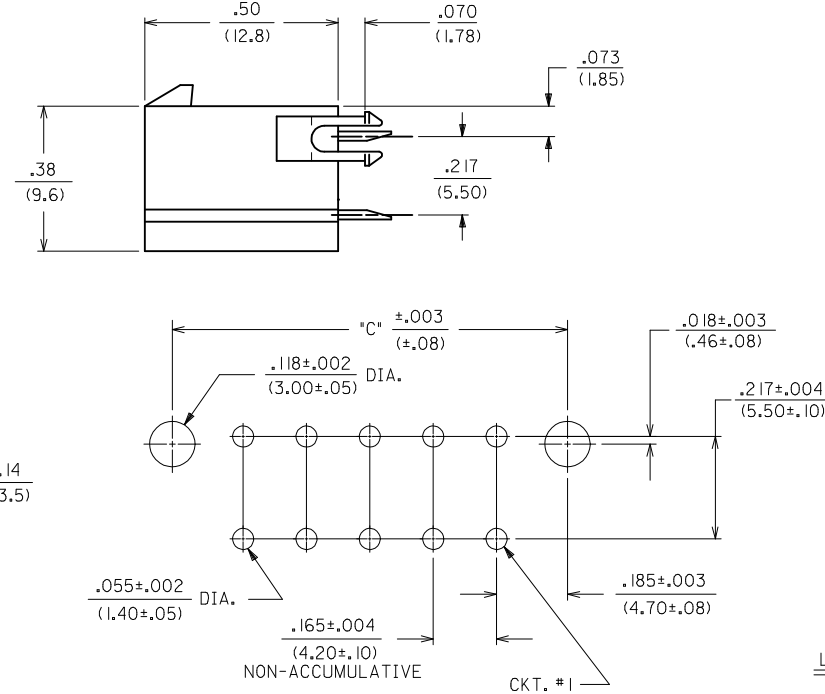

RECOMMENDED HOLE LAYOUT FOR .070/(1.78) MAX. THICK P. C. BOARD

VIEWED FROM COMPONENT SIDE

**LEGEND:**

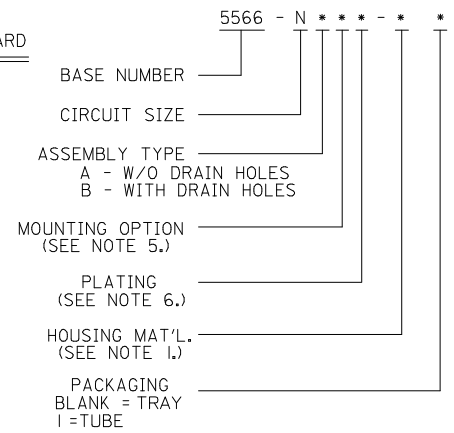

|      |      |
|------|------|
| 4    | R2   |
| 3    | R2   |
| 2    | R2   |
| 1    | R2   |
| SHT. | REV. |

|                                                                                                                                       |                                      |                                                            |  |                                                                                                                                  |                 |                                                                                                               |                               |                               |
|---------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------------------------------|-------------------------------|-------------------------------|
| <b>REVISED NOTES</b><br>EC NO: UCP2009-1336<br>DRAWN: KLOSTERMEIER 2008/11/24<br>CHKD: JEBELL 2008/11/24<br>APPR: F. SMITH 2008/11/24 | <b>QUALITY SYMBOLS</b><br>▽=0<br>▽=0 | <b>GENERAL TOLERANCES (UNLESS SPECIFIED)</b>               |  | <b>DIMENSION STYLE</b><br>IN/MM                                                                                                  |                 | <b>SCALE</b><br>1:1                                                                                           | <b>DESIGN UNITS</b><br>METRIC | <b>THIRD ANGLE PROJECTION</b> |
|                                                                                                                                       |                                      | mm INCH                                                    |  | DRAWN BY<br>RJF                                                                                                                  | DATE<br>8/19/87 | <b>TITLE</b><br>MINI-FIT JR. VERTICAL<br>HEADER ASSEMBLIES WITH<br>MOUNTING PEGS<br><b>MOLEX INCORPORATED</b> |                               |                               |
|                                                                                                                                       |                                      | 4 PLACES ± --- ± ---                                       |  | CHECKED BY<br>GT                                                                                                                 | DATE<br>8/19/87 |                                                                                                               |                               |                               |
|                                                                                                                                       |                                      | 3 PLACES ± --- ± .015                                      |  | APPROVED BY<br>RAS                                                                                                               | DATE<br>8/19/87 |                                                                                                               |                               |                               |
| 2 PLACES ± 0.38 ± .015                                                                                                                |                                      | ANGULAR ± 1/2°                                             |  | MATERIAL NO.<br>SEE SHTS 2-4                                                                                                     |                 | DOCUMENT NO.<br>SDA-5566-N*2*-*                                                                               |                               | SHEET NO.<br>1 OF 4           |
| 1 PLACE ± 0.38 ± ---                                                                                                                  |                                      | DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS |  | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX<br>INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                 |                                                                                                               |                               |                               |

|   |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
|---|----------------|------------|-------------------------|----|----------------|----------------|-------------------------|---|----------------|--------------|-------------------------|---|----------------|------------------|-------------------------|--|
|   | 13             | 12         | 11                      | 10 | 9              | 8              | 7                       | 6 | 5              | 4            | 3                       | 2 | 1              |                  |                         |  |
| J | PLATING:       |            | 35 M.I. TIN             |    | PLATING:       |                | 35 M.I. TIN             |   | PLATING:       |              | 30 M.I. GOLD            |   | PLATING:       |                  | 30 M.I. GOLD            |  |
|   | DRAIN HOLES:   |            | WITHOUT DRAIN HOLES     |    | DRAIN HOLES:   |                | WITHOUT DRAIN HOLES     |   | DRAIN HOLES:   |              | WITHOUT DRAIN HOLES     |   | DRAIN HOLES:   |                  | WITHOUT DRAIN HOLES     |  |
|   | MTG. OPTION:   |            | WITH PEGS               |    | MTG. OPTION:   |                | WITH PEGS               |   | MTG. OPTION:   |              | WITH PEGS               |   | MTG. OPTION:   |                  | WITH PEGS               |  |
|   | HOUSING MAT'L: |            | NYLON 6/6 94V-2 NATURAL |    | HOUSING MAT'L: |                | NYLON 6/6 94V-0 NATURAL |   | HOUSING MAT'L: |              | NYLON 6/6 94V-2 NATURAL |   | HOUSING MAT'L: |                  | NYLON 6/6 94V-0 NATURAL |  |
|   | PACKAGING:     |            | TRAY                    |    | PACKAGING:     |                | TRAY                    |   | PACKAGING:     |              | TRAY                    |   | PACKAGING:     |                  | TRAY                    |  |
| I | PART NO.       | ENG NO.    | CKTS                    |    | PART NO.       | ENG NO.        | CKTS                    |   | PART NO.       | ENG NO.      | CKTS                    |   | PART NO.       | ENG NO.          | CKTS                    |  |
|   | 39-29-9023     | 5566 -02A2 | 2                       |    | 39-29-9027     | 5566 -02A2-210 | 2                       |   | 39-29-9025     | 5566 -02A2GS | 2                       |   | 39-29-9029     | 5566 -02A2GS-210 | 2                       |  |
|   | 39-29-9043     | 5566 -04A2 | 4                       |    | 39-29-9047     | 5566 -04A2-210 | 4                       |   | 39-29-9045     | 5566 -04A2GS | 4                       |   | 39-29-9049     | 5566 -04A2GS-210 | 4                       |  |
|   | 39-29-9063     | 5566 -06A2 | 6                       |    | 39-29-9067     | 5566 -06A2-210 | 6                       |   | 39-29-9065     | 5566 -06A2GS | 6                       |   | 39-29-9069     | 5566 -06A2GS-210 | 6                       |  |
|   | 39-29-9083     | 5566 -08A2 | 8                       |    | 39-29-9087     | 5566 -08A2-210 | 8                       |   | 39-29-9085     | 5566 -08A2GS | 8                       |   | 39-29-9089     | 5566 -08A2GS-210 | 8                       |  |
| H | 39-29-9103     | 5566 -10A2 | 10                      |    | 39-29-9107     | 5566 -10A2-210 | 10                      |   | 39-29-9105     | 5566 -10A2GS | 10                      |   | 39-29-9109     | 5566 -10A2GS-210 | 10                      |  |
|   | 39-29-9123     | 5566 -12A2 | 12                      |    | 39-29-9127     | 5566 -12A2-210 | 12                      |   | 39-29-9125     | 5566 -12A2GS | 12                      |   | 39-29-9129     | 5566 -12A2GS-210 | 12                      |  |
|   | 39-29-9143     | 5566 -14A2 | 14                      |    | 39-29-9147     | 5566 -14A2-210 | 14                      |   | 39-29-9145     | 5566 -14A2GS | 14                      |   | 39-29-9149     | 5566 -14A2GS-210 | 14                      |  |
|   | 39-29-9163     | 5566 -16A2 | 16                      |    | 39-29-9167     | 5566 -16A2-210 | 16                      |   | 39-29-9165     | 5566 -16A2GS | 16                      |   | 39-29-9169     | 5566 -16A2GS-210 | 16                      |  |
|   | 39-29-9183     | 5566 -18A2 | 18                      |    | 39-29-9187     | 5566 -18A2-210 | 18                      |   | 39-29-9185     | 5566 -18A2GS | 18                      |   | 39-29-9189     | 5566 -18A2GS-210 | 18                      |  |
|   | 39-29-9203     | 5566 -20A2 | 20                      |    | 39-29-9207     | 5566 -20A2-210 | 20                      |   | 39-29-9205     | 5566 -20A2GS | 20                      |   | 39-29-9209     | 5566 -20A2GS-210 | 20                      |  |
|   | 39-29-9223     | 5566 -22A2 | 22                      |    | 39-29-9227     | 5566 -22A2-210 | 22                      |   | 39-29-9225     | 5566 -22A2GS | 22                      |   | 39-29-9229     | 5566 -22A2GS-210 | 22                      |  |
|   | 39-29-9243     | 5566 -24A2 | 24                      |    | 39-29-9247     | 5566 -24A2-210 | 24                      |   | 39-29-9245     | 5566 -24A2GS | 24                      |   | 39-29-9249     | 5566 -24A2GS-210 | 24                      |  |
|   |                | -          |                         |    |                | -              |                         |   |                | -            |                         |   |                | -                |                         |  |
|   |                | -          |                         |    |                | -              |                         |   |                | -            |                         |   |                | -                |                         |  |
| G | PLATING:       |            | 35 M.I. TIN             |    | PLATING:       |                | 35 M.I. TIN             |   | PLATING:       |              | 30 M.I. GOLD            |   | PLATING:       |                  | 30 M.I. GOLD            |  |
|   | DRAIN HOLES:   |            | WITH DRAIN HOLES        |    | DRAIN HOLES:   |                | WITH DRAIN HOLES        |   | DRAIN HOLES:   |              | WITH DRAIN HOLES        |   | DRAIN HOLES:   |                  | WITH DRAIN HOLES        |  |
|   | MTG. OPTION:   |            | WITH PEGS               |    | MTG. OPTION:   |                | WITH PEGS               |   | MTG. OPTION:   |              | WITH PEGS               |   | MTG. OPTION:   |                  | WITH PEGS               |  |
|   | HOUSING MAT'L: |            | NYLON 6/6 94V-2 NATURAL |    | HOUSING MAT'L: |                | NYLON 6/6 94V-0 NATURAL |   | HOUSING MAT'L: |              | NYLON 6/6 94V-2 NATURAL |   | HOUSING MAT'L: |                  | NYLON 6/6 94V-0 NATURAL |  |
|   | PACKAGING:     |            | TRAY                    |    | PACKAGING:     |                | TRAY                    |   | PACKAGING:     |              | TRAY                    |   | PACKAGING:     |                  | TRAY                    |  |
| F | PART NO.       | ENG NO.    | CKTS                    |    | PART NO.       | ENG NO.        | CKTS                    |   | PART NO.       | ENG NO.      | CKTS                    |   | PART NO.       | ENG NO.          | CKTS                    |  |
|   | 39-29-9022     | 5566 -02B2 | 2                       |    | 39-29-9026     | 5566 -02B2-210 | 2                       |   | 39-29-9024     | 5566 -02B2GS | 2                       |   | 39-28-9028     | 5566 -02B2GS-210 | 2                       |  |
|   | 39-29-9042     | 5566 -04B2 | 4                       |    | 39-29-9046     | 5566 -04B2-210 | 4                       |   | 39-29-9044     | 5566 -04B2GS | 4                       |   | 39-28-9048     | 5566 -04B2GS-210 | 4                       |  |
|   | 39-29-9062     | 5566 -06B2 | 6                       |    | 39-29-9066     | 5566 -06B2-210 | 6                       |   | 39-29-9064     | 5566 -06B2GS | 6                       |   | 39-28-9068     | 5566 -06B2GS-210 | 6                       |  |
|   | 39-29-9082     | 5566 -08B2 | 8                       |    | 39-29-9086     | 5566 -08B2-210 | 8                       |   | 39-29-9084     | 5566 -08B2GS | 8                       |   | 39-28-9088     | 5566 -08B2GS-210 | 8                       |  |
| E | 39-29-9102     | 5566 -10B2 | 10                      |    | 39-29-9106     | 5566 -10B2-210 | 10                      |   | 39-29-9104     | 5566 -10B2GS | 10                      |   | 39-28-9108     | 5566 -10B2GS-210 | 10                      |  |
|   | 39-29-9122     | 5566 -12B2 | 12                      |    | 39-29-9126     | 5566 -12B2-210 | 12                      |   | 39-29-9124     | 5566 -12B2GS | 12                      |   | 39-28-9128     | 5566 -12B2GS-210 | 12                      |  |
|   | 39-29-9142     | 5566 -14B2 | 14                      |    | 39-29-9146     | 5566 -14B2-210 | 14                      |   | 39-29-9144     | 5566 -14B2GS | 14                      |   | 39-28-9148     | 5566 -14B2GS-210 | 14                      |  |
|   | 39-29-9162     | 5566 -16B2 | 16                      |    | 39-29-9166     | 5566 -16B2-210 | 16                      |   | 39-29-9164     | 5566 -16B2GS | 16                      |   | 39-28-9168     | 5566 -16B2GS-210 | 16                      |  |
|   | 39-29-9182     | 5566 -18B2 | 18                      |    | 39-29-9186     | 5566 -18B2-210 | 18                      |   | 39-29-9184     | 5566 -18B2GS | 18                      |   | 39-28-9188     | 5566 -18B2GS-210 | 18                      |  |
|   | 39-29-9202     | 5566 -20B2 | 20                      |    | 39-29-9206     | 5566 -20B2-210 | 20                      |   | 39-29-9204     | 5566 -20B2GS | 20                      |   | 39-28-9208     | 5566 -20B2GS-210 | 20                      |  |
|   | 39-29-9222     | 5566 -22B2 | 22                      |    | 39-29-9226     | 5566 -22B2-210 | 22                      |   | 39-29-9224     | 5566 -22B2GS | 22                      |   | 39-28-9228     | 5566 -22B2GS-210 | 22                      |  |
|   | 39-29-9242     | 5566 -24B2 | 24                      |    | 39-29-9246     | 5566 -24B2-210 | 24                      |   | 39-29-9244     | 5566 -24B2GS | 24                      |   | 39-28-9248     | 5566 -24B2GS-210 | 24                      |  |
|   |                | -          |                         |    |                | -              |                         |   |                | -            |                         |   |                | -                |                         |  |
|   |                | -          |                         |    |                | -              |                         |   |                | -            |                         |   |                | -                |                         |  |
| D |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
|   |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
|   |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
|   |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
|   |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
| C |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
|   |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
|   |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
|   |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
|   |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
| B |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
|   |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
|   |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
|   |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
|   |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
| A |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
|   |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
|   |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
|   |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |
|   |                |            |                         |    |                |                |                         |   |                |              |                         |   |                |                  |                         |  |

|                                                                                                                      |     |             |                               |                                       |    |                          |                                                                                                                               |                 |                                                                 |                        |
|----------------------------------------------------------------------------------------------------------------------|-----|-------------|-------------------------------|---------------------------------------|----|--------------------------|-------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------------------------------------------------------|------------------------|
| SEE SHEET 1<br>EC NO: UCP2009-1336<br>DRWN:KLOSTEMEIER 2008/11/24<br>CHKD:JBELL 2008/11/24<br>APPR:FSMITH 2008/11/24 | REV | DESCRIPTION | QUALITY SYMBOLS<br>▽=0<br>▽=0 | GENERAL TOLERANCES (UNLESS SPECIFIED) |    | DIMENSION STYLE<br>IN/MM |                                                                                                                               | SCALE<br>1:1    | DESIGN UNITS<br>METRIC                                          | THIRD ANGLE PROJECTION |
|                                                                                                                      |     |             |                               | 4 PLACES ± ---                        | mm | INCH                     | DRAWN BY<br>RJF                                                                                                               | DATE<br>8/19/87 | TITLE<br>MINI-FIT JR. VERT HEADER ASSEMBLIES WITH MOUNTING PEGS |                        |
|                                                                                                                      |     |             |                               |                                       |    |                          | CHECKED BY<br>GT                                                                                                              | DATE<br>8/19/87 |                                                                 |                        |
|                                                                                                                      |     |             |                               |                                       |    |                          | APPROVED BY<br>RAS                                                                                                            | DATE<br>8/19/87 |                                                                 |                        |
|                                                                                                                      |     |             |                               |                                       |    |                          | MATERIAL NO.<br>SEE CHART                                                                                                     |                 |                                                                 |                        |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS                                                                 |     |             |                               |                                       |    | SIZE<br>C                | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                 |                                                                 |                        |

|                                        |    |    |    |   |   |   |   |   |   |   |   |   |  |
|----------------------------------------|----|----|----|---|---|---|---|---|---|---|---|---|--|
| tb_frame_C_P_ME_T<br>Rev. D 2004/04/02 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |  |
|----------------------------------------|----|----|----|---|---|---|---|---|---|---|---|---|--|