

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [5015981604](#)
Status: **Active**
Description: 4.00mm (.157") Pitch OBD-II Wire-to-Wire Receptacle Housing Panel Mount

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-501598-001 \(PDF\)](#)

General

Product Family Crimp Housings
 Series [501598](#)
 Product Name OBD-II

Physical

Circuits (maximum) 16
 Color - Resin Blue
 Gender Receptacle
 Glow-Wire Compliant No
 Lock to Mating Part Yes
 Material - Resin Polyester
 Number of Rows 2
 Packaging Type Tray
 Panel Mount Yes
 Pitch - Mating Interface (in) 0.157 In
 Pitch - Mating Interface (mm) 4.00 mm
 Pitch - Term. Interface (in) 0.157 In
 Pitch - Term. Interface (mm) 4.00 mm
 Polarized to Mating Part Yes
 Ports 1
 Stackable No
 Temperature Range - Operating -40°C to +85°C

Material Info

Reference - Drawing Numbers

Product Specification PS-501598-001
 Sales Drawing SD-501598-001

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series



[501598Series](#)

Mates With


Connectors for OBD-II Scanner

Use With



[50695](#) Crimp Terminal

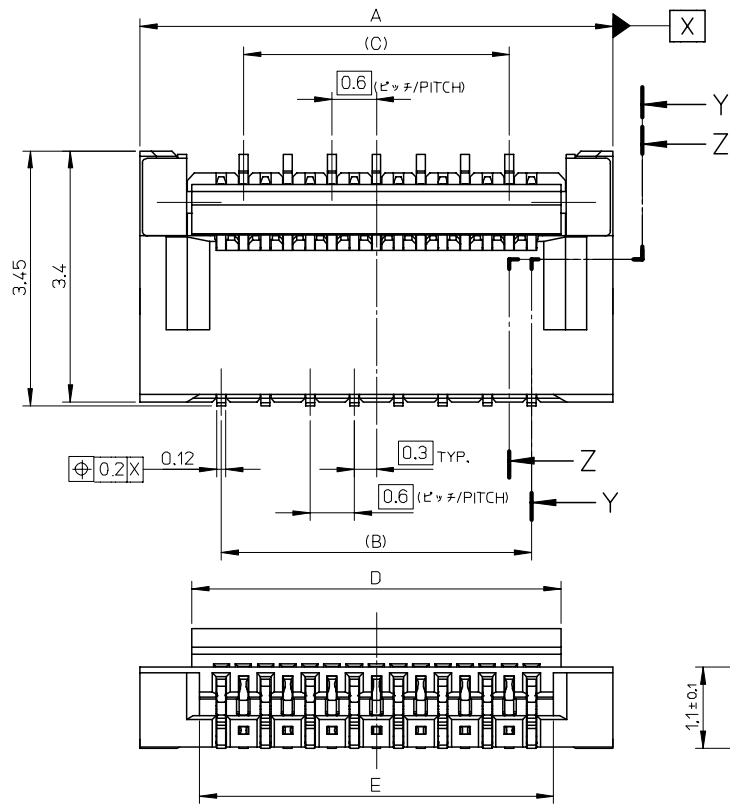

SECTION Z-Z



SECTION Y-Y

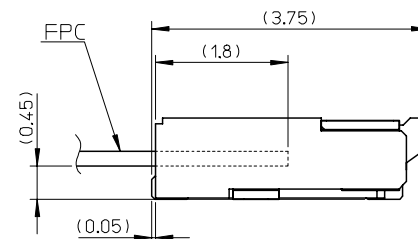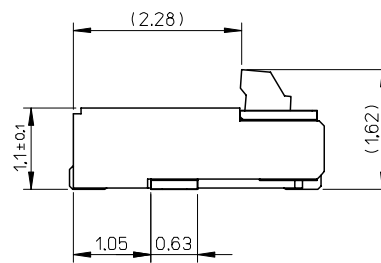


ACTUATOR CLOSE

部品構成

1. ハウジング・・・材質：耐熱性樹脂 黒色 UL94V-0
HOUSING MATERIAL :HEAT RESISTANT POLYMER BLACK UL94-V0
2. 奇数ターミナル・・・材質：銅合金
ODD TERMINAL MATERIAL :COPPER ALLOY
処理：ニッケル下地部分金メッキ（接触部及びテール部）
FINISH :PARTLY GOLD(CONTACT, TAIL) OVER NICKEL PLATING
3. 偶数ターミナル・・・材質：銅合金
EVEN TERMINAL MATERIAL :COPPER ALLOY
処理：ニッケル下地部分金メッキ（接触部及びテール部）
FINISH :PARTLY GOLD(CONTACT, TAIL) OVER NICKEL PLATING
4. アクチュエータ・・・材質：耐熱性樹脂 灰色 UL94V-0
ACTUATOR MATERIAL :HEAT RESISTANT POLYMER GRAY UL94-V0
5. ネイル・・・材質：銅合金
NAIL MATERIAL :COPPER ALLOY
処理：ニッケル下地すずめっき
FINISH :TIN OVER NICKEL PLATING

9.0	9.2	7.8	8.4	10.6	501616-2940	29
8.4	8.6	7.2	7.8	10.0	501616-2740	27
7.8	8.0	6.6	7.2	9.4	501616-2540	25
6.0	6.2	4.8	5.4	7.6	501616-1940	19
E	D	(C)	(B)	A	MATERIAL NO.	CIRCUIT

RELEASED EC NO: J2007-0951 DRW:KUSATO 2007/05/22 CHK:DHIRATA 2007/05/22 APPR:HIRATA 2007/05/22	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 15:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	10 UNDER	±0.2	DRAWN BY K.TAKAHASHI		DATE 2006/07/28	TITLE 0.3 FPC CONN. ZIF E/O HSG ASSY (H=1.1)	
	10 OVER 30 UNDER	±0.25	CHECKED BY H.HIRATA		DATE 2006/07/28	MOLEX INCORPORATED	
	30 OVER	±0.3	APPROVED BY M.SASAO		DATE 2006/07/28		
	ANGULAR	±3 °	MATERIAL NO.		DOCUMENT NO. SD-501616-005	SHEET NO. 1 OF 2	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART					

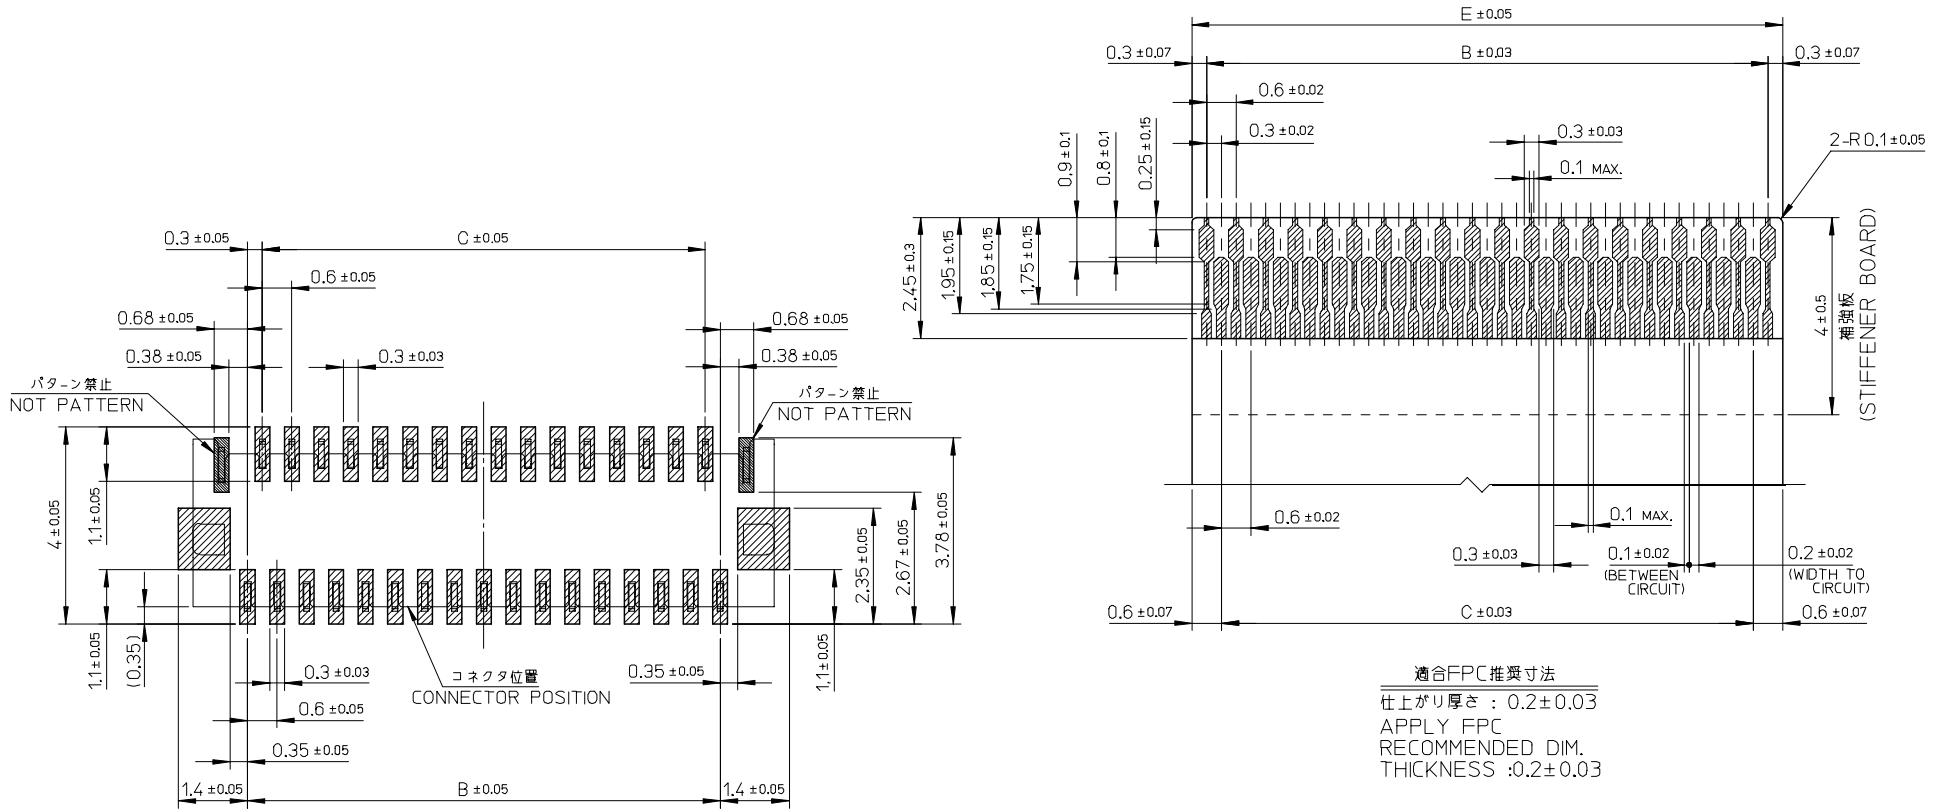


適合FPC推奨寸法
 仕上がり厚さ : 0.2 ± 0.03
 APPLY FPC
 RECOMMENDED DIM.
 THICKNESS : 0.2 ± 0.03

参考基板レイアウト (マウント面)
 P.C. BOARD PATTERN
 DIM.(REF.)

9.0	7.8	8.4	501616-2940	29
8.4	7.2	7.8	501616-2740	27
7.8	6.6	7.2	501616-2540	25
6.0	4.8	5.4	501616-1940	19
E	C	B	MATERIAL NO.	CIRCUITS


注記
 1. 基板実装前にアクチュエータを操作しないで下さい。
 PLEASE DO NOT OPERATE THE ACTUATOR BEFORE MOUNTING.
 必ず基板に実装し、FPCを挿入してからアクチュエータを操作して下さい。
 PLEASE OPERATE THE ACTUATOR AFTER MOUNTING ON
 THE SUBSTRATE, AND MATING FPC.
 2. ELV及びRoHS適合品
 ELV AND RoHS COMPLIANT

RELEASED EC No: J2007-0951 DRW: NKUSATO 2007/05/22 CHKD: HIRATA 2007/05/22 APPR: HIRATA 2007/05/22	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
	10 UNDER	± 0.2	DRAWN BY K. TAKAHASHI	DATE 2006/07/28	TITLE 0.3 FPC CONN. ZIF E/0 HSG ASSY (H=1.1)			
	10 OVER 30 UNDER	± 0.25	CHECKED BY H. HIRATA	DATE 2006/07/28	MOLEX INCORPORATED			
	30 OVER	± 0.3	APPROVED BY M. SASAO	DATE 2006/07/28	DOCUMENT NO. SD-501616-005			
	ANGULAR	± 3 °	MATERIAL NO. SEE CHART		SHEET NO. 2 OF 2			
0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

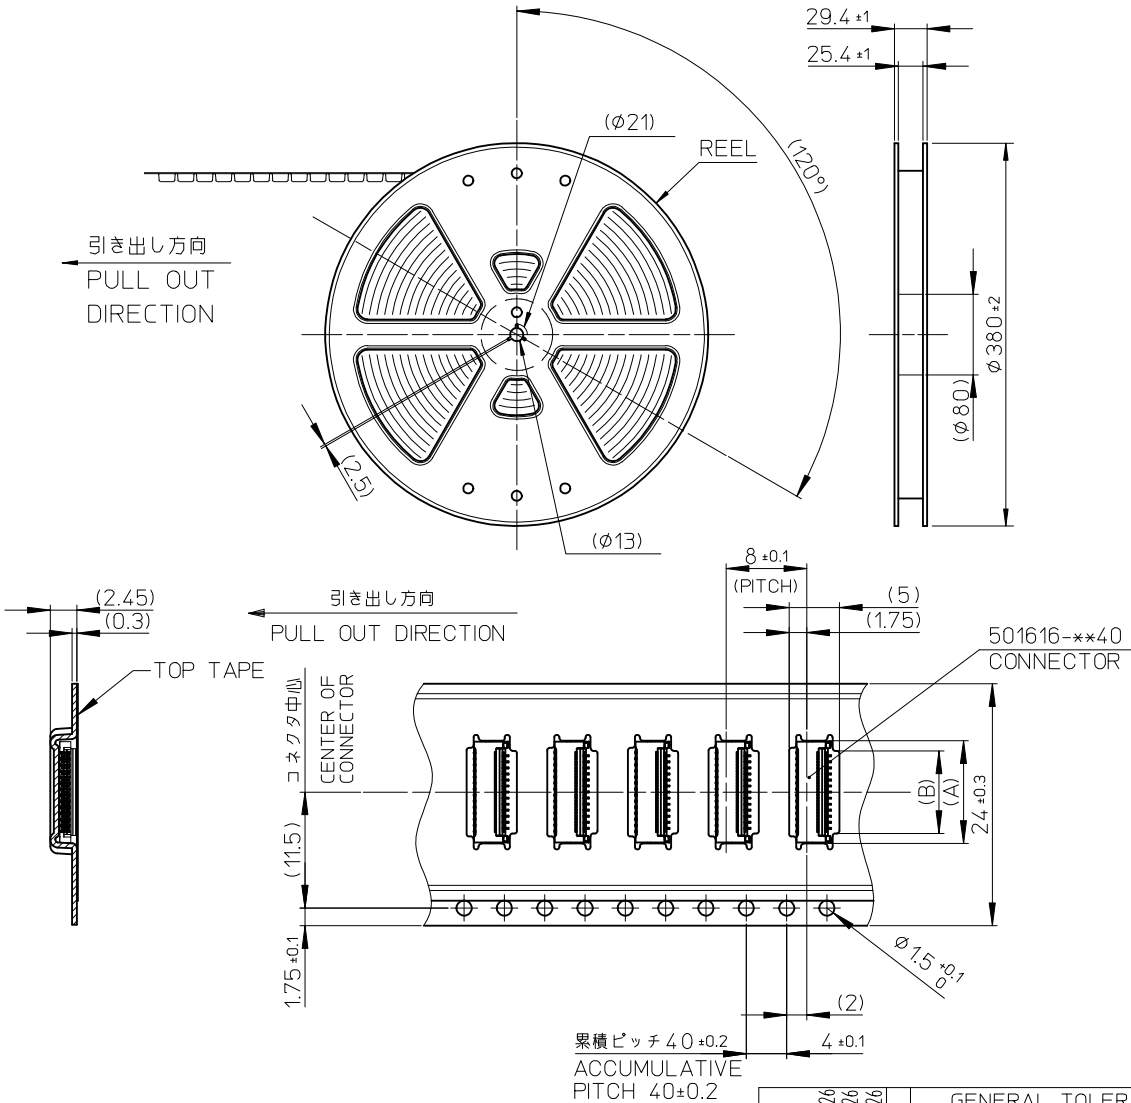

NOTES

- 製品 (501616-**40) の詳細寸法については、図面 SD-501616-005 をご参照下さい。
IN THE PACKAGE, PART NO. 501616-**40 DETAILED DIMENSIONS, REFER TO SALES DRAWING NO. SD-501616-005.
- 梱包数量 : 3000個/リール
NUMBER OF CONNECTORS : 3000 PCS/REEL
- リードテープ長さ
LEAD TAPE LENGTH

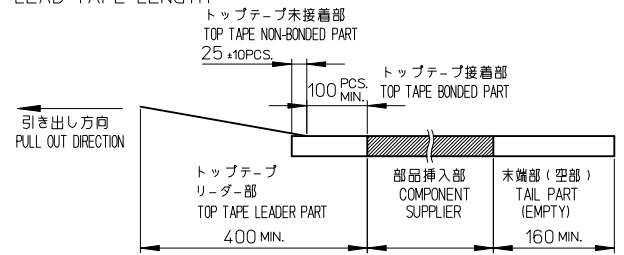

- 材料
キャリアテープ : ポリスチレン (PS)
トップテープ : PET, PE, PEF
リール : ポリスチレン (PS) <リサイクル材を含む>
MATERIAL
CARRIER TAPE : POLYSTYRENE (PS)
TOP TAPE : PET, PE, PEF
REEL : POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>
- ELV及びRoHS適合品
ELV AND RoHS COMPLIANT

8.8	10.8	501616-2975	29
8.2	10.2	501616-2775	27
7.6	9.6	501616-2575	25
5.8	7.8	501616-1975	19
B	A	EMBOSSED PACKAGE オーダー番号 ORDER No.	極数 CIRCUIT

エンボステープ内の製品の向き
DIRECTION OF CONNECTOR IN
EMBOSSED TAPE

REVISED EC NO: J2009-1784 DRWN:MKAWABATA 2009/01/26 CHKD:HSHINOYAMA 2009/01/26 APPR:HSHINOYAMA 2009/01/26 REV A	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
	10 UNDER	± ---	DRAWN BY K. TAKAHASHI	DATE 2006/7/28	TITLE 0.3 FPC CONN. B/F EMBSTP PKG H=1.1				
	10 OVER 30 UNDER	± ---	CHECKED BY H. HIRATA	DATE 2006/7/28	MOLEX INCORPORATED				
	30 OVER	± ---	APPROVED BY M. SASAO	DATE 2006/7/28	DOCUMENT NO. SD-501616-006				
ANGULAR ± --- °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE CHART		SHEET NO. 1 OF 1		INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	