


HOLE PATTERN:
Space requirement 7x7 pitch.

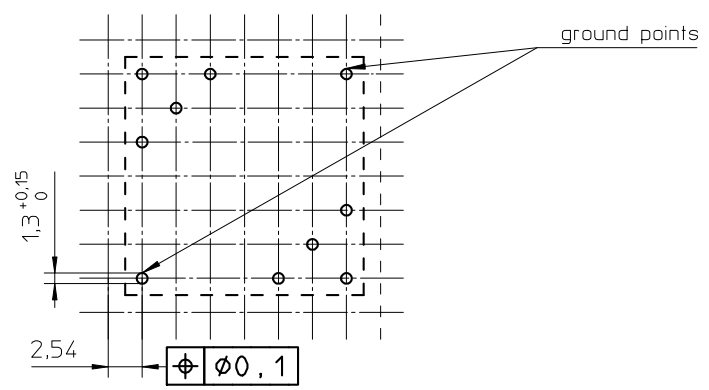

Coil former material: Sumikon PM9630 (PF), glass-reinforced.
UL file number: E41429 - UL94V-0.
Pin material: Copperclad steel, Sn plated.
Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s.
Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.
Min. winding area: 19,6 mm².
Mean length of turn: 35 mm.

CLASSNO.		2007-10-01	
NAME		CSV-RM7-2S-8P-TZ	
VERV.		4322 021 06761	
MPA	CHECK CONTR.	DAT.	07-10-01
NAME	A.Wojtasz	SUPERS.	1
VERV.		SH	112 - 001
		BL	010
		BL	A3
Property of		© FERROXCUBE 2002	
Eigenaam van			