



5303D

Preliminary

NPN SILICON TRANSISTOR

HIGH VOLTAGE NPN TRANSISTOR WITH DIODE



■ DESCRIPTION

The UTC **5303D** is a high voltage silicon triple diffused type NPN transistor with diode. This chip is built in free-wheeling diode, making efficient anti-saturation operation.

■ FEATURES

- * Not Necessary to Interest an h_{FE} Value
- * Need Very Low Base Drive
- * Can Be Used In Half Bridge Light Ballast Application

■ INTERNAL SCHEMATIC DIAGRAM

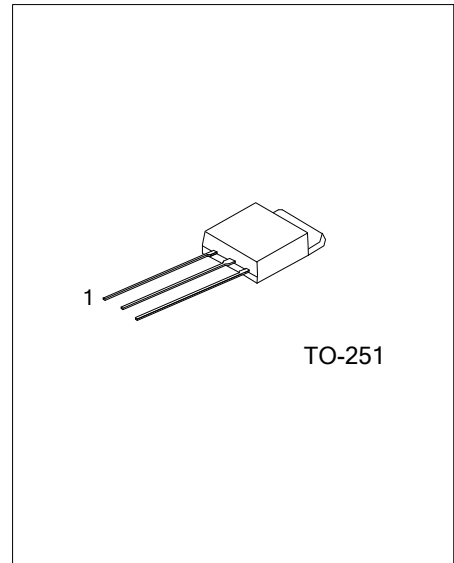

Lead-free: 5303DL
Halogen-free: 5303DG

■ ORDERING INFORMATION

Ordering Number			Package	Pin Assignment			Packing
Normal	Lead Free Plating	Halogen Free		1	2	2	
5303D-TM3-T	5303DL-TM3-T	5303DG-TM3-T	TO-251	B	C	E	Tube

<p>5303DL-TM3-T</p>	<p>(1) T: Tube (2) TM3: TO-251 (3) G: Halogen Free, L: Lead Free, Blank: Pb/Sn</p>
---------------------	--

■ ABSOLUTE MAXIMUM RATING (Ta = 25°C, unless otherwise noted)

PARAMETER	SYMBOL	RATINGS	UNIT
Collector-Base Voltage	V_{CBO}	700	V
Collector-Emitter Voltage	V_{CEO}	400	V
Emitter-Base Voltage	V_{EBO}	10	V
Collector Current	I_C	2	A
Collector Peak Current (tp<5ms)	I_{CM}	4	A
Base Current	I_B	1	A
Base Peak Current (tp<5ms)	I_{BM}	2	A
Collector Dissipation (Tc≤25°C)	P_C	25	W
Maximum Operating Junction Temperature	T_J	+150	°C
Storage Temperature Range	T_{STG}	-65~+150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	100	°C/W
Junction to Case	θ_{JC}	6.25	°C/W

■ ELECTRICAL CHARACTERISTICS (Ta = 25°C, unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Collector-Base Voltage	BV_{CBO}	$I_C = 1mA, I_B = 0$	700			V
Collector-Emitter Breakdown Voltage (Note)	BV_{CEO}	$I_C = 10mA, I_E = 0$	400			V
Emitter-Base Breakdown Voltage	BV_{EBO}	$I_E = 1mA, I_C = 0$	10			V
Collector Cutoff Current	I_{CBO}	$V_{CB} = 700V, I_E = 0$			1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 9V, I_C = 0$			1	μA
ON CHARACTERISTICS						
DC Current Gain	h_{FE1}	$V_{CE} = 5V, I_C = 10mA$	10			
	h_{FE2}	$V_{CE} = 5V, I_C = 400mA$	10		30	
	h_{FE3}	$V_{CE} = 5V, I_C = 1A$	5			
Collector-Emitter Saturation Voltage (Note)	$V_{CE(SAT1)}$	$I_C = 0.5A, I_B = 0.1A$			0.5	V
	$V_{CE(SAT2)}$	$I_C = 1A, I_B = 0.25A$		1.1	1.5	V
Base-Emitter Saturation Voltage (Note)	$V_{BE(SAT)}$	$I_C = 0.5A, I_B = 0.1A$			1.1	V
	$V_{BE(SAT2)}$	$I_C = 1A, I_B = 0.25A$			1.2	V
SWITCHING CHARACTERISTICS						
Turn On Time	t_{ON}	$V_{CC} = 250V, I_C = 1A,$		0.15	0.3	μS
Storage Time	t_{STG}	$I_{B1} = I_{B2} = 0.2A, t_p = 25\mu S$ Duty		0.5	0.9	μS
Fall Time	t_F	Cycle<1%		0.2	0.4	μS
Diode						
Forward Voltage Drop	V_F	$I_C = 1A$			1.4	V
Fall Time	t_F	$I_C = 1A$			800	μS

Note: Pulsed duration = 300 μS , duty cycle ≤2%

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.