

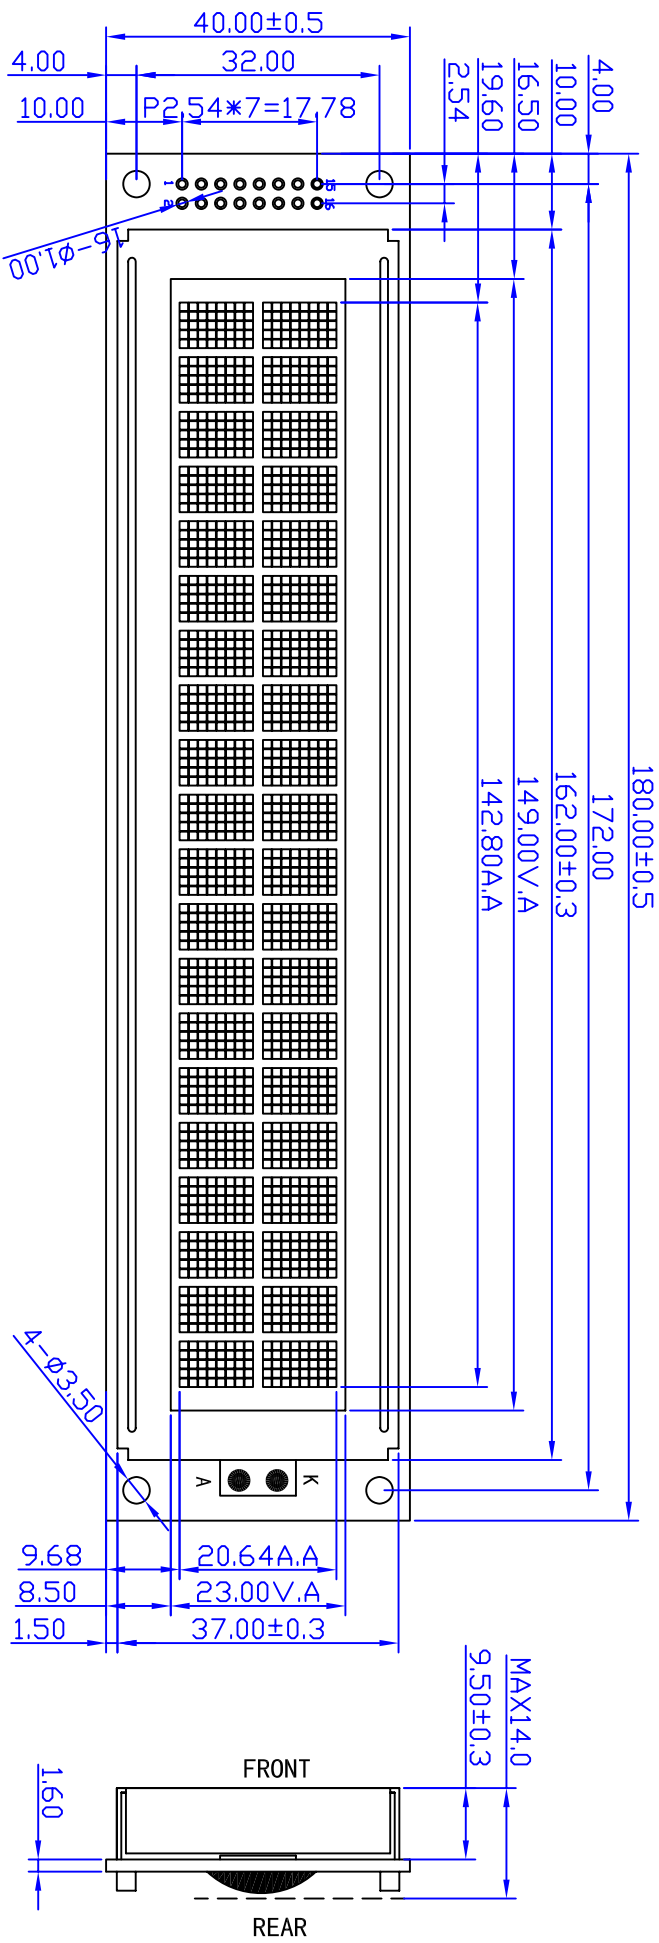


| | | | |
|------|----------------|----|------|
| REV. | CHANGE CONTENT | BY | DATE |
| | | | |

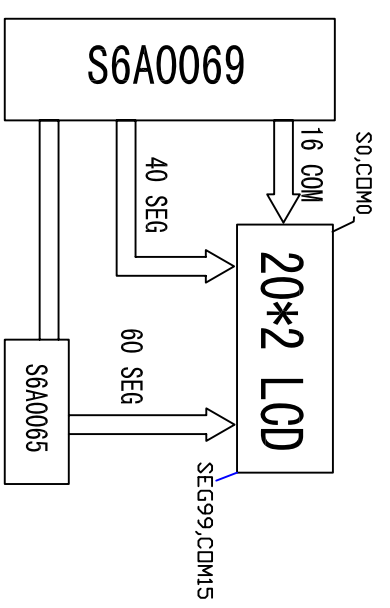

| PIN NO. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 ~ 16 |
|---------|---|---|-----|-----|----|----|-----|---|--------|
| SYMBOL | A | K | VSS | VDD | V0 | RS | R/W | E | DO~D7 |

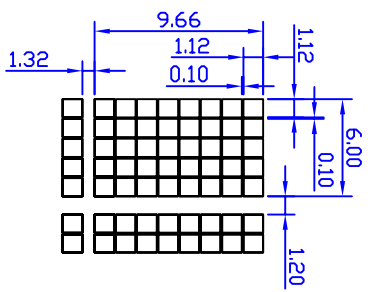

- NOTE:
1. DISPLAY TYPE: STN, POSITIVE, TRANSPARENT, Y-G
 2. VIEWING DIR: 6:00
 3. DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, Vop 4.4V VDD=5.0V
 4. OP. TEMP: 0~50°C
 5. ST. TEMP: -10~60°C
 6. DRIVER IC: S6A0069 S6A0065
 7. LED B/L: VF=4.2±0.15V, IF=500mA

COLOR: Y/G

| | | | | | | |
|----------------|----------|-------|----------------------------|------------|----------------------------------|-------------|
| TOLERANCE | | | HTDISPLAY CO., LTD. | | DRAWING No. : HC200202C-YF60L-VA | |
| >0~6 ±0.10 | DESIGN | ZOJYS | 05.12.21 | STANDARD | REV. : A | SCALE : - |
| >6~80 ±0.20 | CHECKED | | | TECHNOLOGY | PROJECTION: | UNIT : mm |
| >80~240 ±0.30 | APPROVED | | | Q.A | | SHEET : 1/1 |
| >240~400 ±0.50 | | | | | | |
| // 1.0 ±0.10 | | | | | | |