


## Industrial Chassis

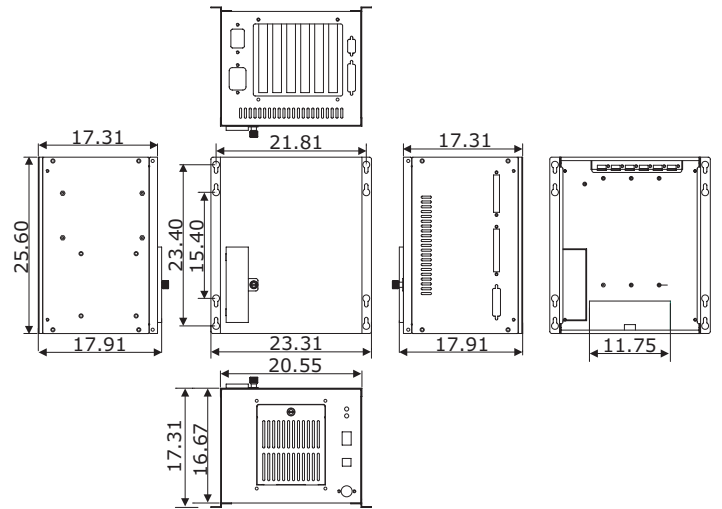

## Features

- ◆ 6-slot space for PICMG1.3 half-size backplane or PCI-ISA bus backplane or ISA bus backplane
- ◆ RC-165 provides 70W AT or 100W ATX power supply
- ◆ 3.5" FDD/HDD space x 1
- ◆ 9cm ball bearing cooling fan x 1
- ◆ FCC/CE industrial Class A approval

## Front Side

The RC-165 provides power switch, LED indicator, reset button and PC/AT keyboard connector. 9cm ball bearing cooling fan provides ventilation into the chassis, is also available.

## Specifications

### Chassis

6-slot half-size industrial chassis

### Drive Space

3.5" FDD/HDD space x 1

### Thermal Solution

9cm ball bearing cooling fan x 1

### Altitude

15,000 feet

### Power Supply

70W AT power supply or 100W ATX power supply

### Temperature

0~+50°C (operating); 0~+70°C (storage)

### Humidity

5~95%; non-condensing

### Safety Standard

FCC/CE on chassis and FCC/CE/UL/TUV on power supply

### Dimensions (L x W x H)

25.6 x 20.55 x 16.67 cm

## Ordering Guide

- ◆ **RC-165W**  
Half-size Deskmount Chassis
- ◆ **RC-165WB-P6S**  
RC-165W Chassis w/HPS-6S B/P, MPE-8071 P/S
- ◆ **RC-165WB-BP6S**  
RC-165W Chassis w/HBP-6S B/P, MPE-8071 P/S
- ◆ **RC-165WD-P6S**  
RC-165W Chassis w/HPS-6S B/P, BPW-8310 ATX P/S
- ◆ **RC-165WD-PE6S(ATX)**  
RC-165W Chassis w/PE-6S B/P, BPW-8310 ATX P/S