


AK 3000

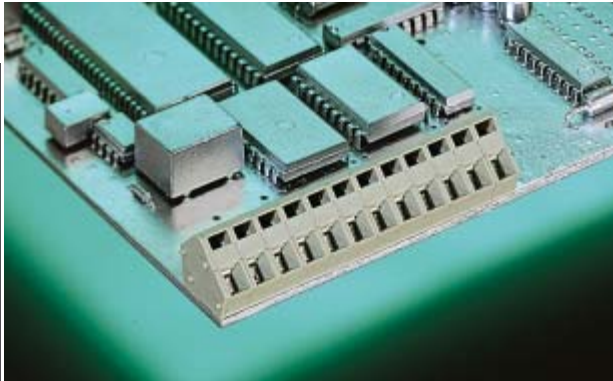

AK 3000/.. - 5,0 - slade grey

**1-n poles, Spacing 5,0 mm adjustable to 5,08 mm
insert required no. of poles ..**

How to order see page 11

Ratings:



| | | |
|---------------|-----------|---------------------|
| Rated Voltage | 300 V | 250 V |
| Rated Current | 16 A | 24 A (T60) |
| Wire Size | AWG 28-14 | 2,5 mm ² |
| Test Voltage | | 2,0 kV |

Max. Rated Cross Section

| | |
|-----------------------------|---------------------|
| Single Wire (solid) | 2,5 mm ² |
| Stranded Wire (flexible) | 2,5 mm ² |
| Stranded wire with Ferrules | 1,5 mm ² |


Dimensions

| | |
|-------------------|------------------|
| Spacing | 5,0 mm (5,08 mm) |
| PCB Hole Diameter | 1,0 mm |
| Stripped Length | 6,0 mm |

Materials


| | |
|---------------------|-----------------|
| Insulating Material | PA |
| Flammability Class | UL94 V-0 |
| Temperature Range | -30°C/+105°C |
| Cage clamp | stainless steel |
| Wire Guard | Cu |
| Colour | slade grey |
| | RAL 7032 |

AK 3000

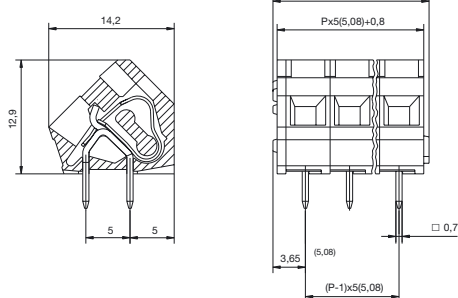

P = No. of poles

AK 3001

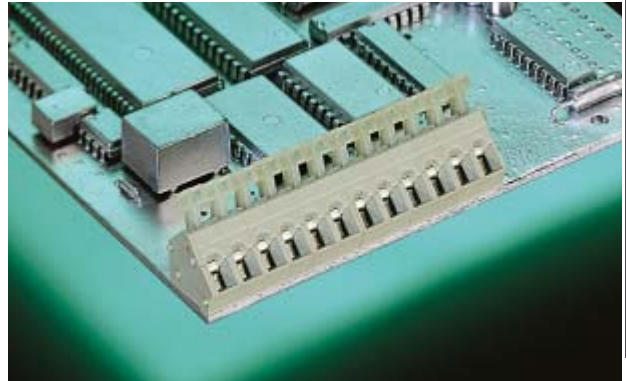

AK 3001/.. KD - 5,0 - slade grey

**1-n poles, Spacing 5,0 mm adjustable to 5,08 mm
insert required no. of poles ..**

How to order see page 11

Ratings:



| | | |
|---------------|-----------|---------------------|
| Rated Voltage | 300 V | 250 V |
| Rated Current | 16 A | 24 A (T60) |
| Wire Size | AWG 28-14 | 2,5 mm ² |
| Test Voltage | | 2,0 kV |

Max. Rated Cross Section

| | |
|-----------------------------|---------------------|
| Single Wire (solid) | 2,5 mm ² |
| Stranded Wire (flexible) | 2,5 mm ² |
| Stranded wire with Ferrules | 1,5 mm ² |


Dimensions

| | |
|-------------------|------------------|
| Spacing | 5,0 mm (5,08 mm) |
| PCB Hole Diameter | 1,0 mm |
| Stripped Length | 6,0 mm |

Materials

| | |
|---------------------|-----------------|
| Insulating Material | PA |
| Flammability Class | UL94 V-0 |
| Temperature Range | -30°C/+105°C |
| Cage clamp | stainless steel |
| Wire Guard | Cu |
| Colour | slade grey |
| | RAL 7032 |

AK 3001

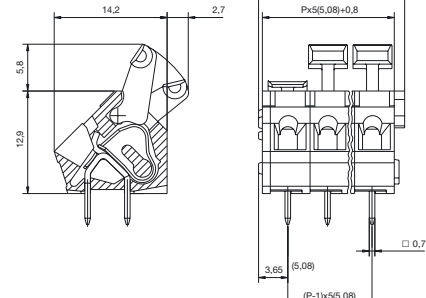

P = No. of poles