




Molded Chip Inductors MC20



Dimensions: $\frac{\text{Inches}}{\text{(mm)}}$

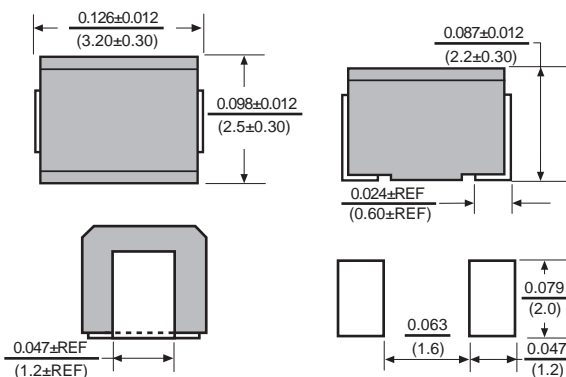

Allied Part Number	Inductance (μh)	Tolerance (%)	Q Min.	Test Freq. (MHz)	SRF Min. (MHz)	DCR Max. (Ω)	IDC (mA)
MC20-R010K-RC	.010	10	15	100	2500	0.13	450
MC20-R012K-RC	.012	10	17	100	2300	0.14	450
MC20-R015K-RC	.015	10	19	100	2100	0.16	450
MC20-R018K-RC	.018	10	21	100	1900	0.18	450
MC20-R022K-RC	.022	10	23	100	1700	0.20	450
MC20-R027K-RC	.027	10	23	100	1500	0.22	450
MC20-R033K-RC	.033	10	25	100	1400	0.24	450
MC20-R039K-RC	.039	10	25	100	1300	0.27	450
MC20-R047K-RC	.047	10	26	100	1200	0.30	450
MC20-R056K-RC	.056	10	26	100	1100	0.33	450
MC20-R068K-RC	.068	10	27	100	1000	0.36	450
MC20-R082K-RC	.082	10	27	100	900	0.40	450
MC20-R10K-RC	.10	10	28	100	700	0.44	450
MC20-R12K-RC	.12	10	30	25.2	500	0.22	450
MC20-R15K-RC	.15	10	30	25.2	450	0.25	450
MC20-R18K-RC	.18	10	30	25.2	400	0.28	450
MC20-R22K-RC	.22	10	30	25.2	350	0.32	450
MC20-R27K-RC	.27	10	30	25.2	320	0.36	450
MC20-R33K-RC	.33	10	30	25.2	300	0.40	450
MC20-R39K-RC	.39	10	30	25.2	250	0.45	450
MC20-R47K-RC	.47	10	30	25.2	220	0.50	450
MC20-R56K-RC	.56	10	30	25.2	180	0.55	450
MC20-R68K-RC	.68	10	30	25.2	160	0.60	450
MC20-R82K-RC	.82	10	30	25.2	140	0.65	450
MC20-1R0K-RC	1.0	10	30	7.96	90	0.70	400
MC20-1R2K-RC	1.2	10	30	7.96	85	0.75	390
MC20-1R5K-RC	1.5	10	30	7.96	70	0.85	370
MC20-1R8K-RC	1.8	10	30	7.96	60	0.90	350
MC20-2R2K-RC	2.2	10	30	7.96	50	1.0	320
MC20-2R7K-RC	2.7	10	30	7.96	45	1.1	290
MC20-3R3K-RC	3.3	10	30	7.96	40	1.2	260
MC20-3R9K-RC	3.9	10	30	7.96	37	1.3	250
MC20-4R7K-RC	4.7	10	30	7.96	32	1.5	220
MC20-5R6K-RC	5.6	10	30	7.96	30	1.6	200
MC20-6R8K-RC	6.8	10	30	7.96	28	1.8	180
MC20-8R2K-RC	8.2	10	30	7.96	25	2.0	170
MC20-100K-RC	10	10	30	2.52	23	2.1	150
MC20-120K-RC	12	10	30	2.52	20	2.5	140
MC20-150K-RC	15	10	30	2.52	19	2.8	130
MC20-180K-RC	18	10	30	2.52	17	3.3	120
MC20-220K-RC	22	10	30	2.52	16	3.7	110
MC20-270K-RC	27	10	30	2.52	14	5.0	80
MC20-330K-RC	33	10	30	2.52	13	5.6	70
MC20-390K-RC	39	10	30	2.52	12	6.4	65
MC20-470K-RC	47	10	30	2.52	10	7.0	60
MC20-560K-RC	56	10	30	2.52	9	8.0	55
MC20-680K-RC	68	10	30	2.52	9	9.0	50
MC20-820K-RC	82	10	30	2.52	8	10	45
MC20-101K-RC	100	10	20	0.796	7	10	40
MC20-121K-RC	120	10	20	0.796	7	11	70
MC20-151K-RC	150	10	20	0.796	6	15	65
MC20-181K-RC	180	10	20	0.796	6	17	60
MC20-221K-RC	220	10	20	0.796	5	21	50
MC20-271K-RC	270	10	20	0.798	6	22	45
MC20-331K-RC	330	10	20	0.796	5	34	40

Available in tighter tolerances.
All specifications subject to change without notice.

Features

- 1210 Molded Chip Inductor
- Excellent Solder Heat Resistance
- Terminals have high resistance to pull forces

Electrical

Inductance Range: .01μh ~ 330μh

Tolerance: 10% over entire range

Also available in 5%

Test Frequency:

- .01μh ~ .1μh measured at 100Mhz,
- .12μh ~ .82μh measured at 25.2Mhz,
- 1μh ~ 8.2μh measured at 7.96Mhz,
- 10μh ~ 82μh measured at 2.52Mhz,
- 100μh ~ 470μh measured at .796Mhz,

Operating Temp: -25°C ~ +85°C @ 75% RH

IDC: The current at which inductance will drop no more than 10% of it's original value.

Resistance to Soldering Heat

Pre-heating: 150°C, 1min

Solder Composition: Sn/Pb 63/37

Solder Temperature: 260 ± 5°C

Immersion Time: 10 ± 1sec, with no damage

Physical

Packaging: 2000 pieces per 7 inch reel.

Marking: EIA Inductance code