

ADM6316/ADM6317/ADM6318/ADM6319/ADM6320/ADM6321/ADM6322

TABLE OF CONTENTS

Specifications.....	3	Typical Performance Characteristics	7
Absolute Maximum Ratings.....	5	Outline Dimensions	10
ESD Caution.....	5	Ordering Guide	11
Pin Configurations and Function Descriptions	6		

ADM6316/ADM6317/ADM6318/ADM6319/ADM6320/ADM6321/ADM6322

SPECIFICATIONS

V_{CC} = full operating range, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.

Table 2.

Parameter	Min	Typ	Max	Unit	Test Conditions/Comments
SUPPLY					
V_{CC} Operating Voltage Range	1		5.5	V	
Supply Current		10	20	μA	$V_{CC} = 5.5\text{ V}$
		5	12	μA	$V_{CC} = 3.6\text{ V}$
RESET THRESHOLD VOLTAGE					
V_{TH} – 1.5%	V_{TH} – 1.5%	V_{TH}	V_{TH} + 1.5%	V	$T_A = +25^\circ\text{C}$
V_{TH} – 2.5%	V_{TH} – 2.5%	V_{TH}	V_{TH} + 2.5%	V	$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$
RESET THRESHOLD TEMPERATURE COEFFICIENT		40		ppm/ $^\circ\text{C}$	
RESET THRESHOLD Hysteresis		3		mV	
RESET TIMEOUT PERIOD					
ADM63_A	1	1.4	2	ms	
ADM63_B	20	28	40	ms	
ADM63_C	140	200	280	ms	
ADM63_D	1120	1600	2240	ms	
V_{CC} TO RESET DELAY		40		μs	V_{CC} falling at 1 mV/ μs
PUSH-PULL OUTPUT (ADM6316, ADM6317, ADM6318, ADM6319, ADM6321, ADM6322)					
$\overline{\text{RESET}}$ Output Voltage		0.3 0.3 0.3 0.4 $0.8 \times V_{CC}$ $V_{CC} - 1.5$		V	$V_{CC} >= 1.0\text{ V}, I_{SINK} = 50\text{ }\mu A$ $V_{CC} >= 1.2\text{ V}, I_{SINK} = 100\text{ }\mu A$ $V_{CC} >= 2.7\text{ V}, I_{SINK} = 1.2\text{ mA}$ $V_{CC} >= 4.5\text{ V}, I_{SINK} = 3.2\text{ mA}$ $V_{CC} >= 2.7\text{ V}, I_{SOURCE} = 500\text{ }\mu A$ $V_{CC} >= 4.5\text{ V}, I_{SOURCE} = 800\text{ }\mu A$
$\overline{\text{RESET}}$ Rise Time		5	25	ns	From 10% to 90% V_{CC} , $C_L = 5\text{ pF}$, $V_{CC} = 3.3\text{ V}$
RESET Output Voltage		0.3 0.4 $0.8 \times V_{CC}$ $0.8 \times V_{CC}$ $V_{CC} - 1.5$		V	$V_{CC} >= 2.7\text{ V}, I_{SINK} = 1.2\text{ mA}$ $V_{CC} >= 4.5\text{ V}, I_{SINK} = 3.2\text{ mA}$ $V_{CC} >= 1.8\text{ V}, I_{SOURCE} = 150\text{ }\mu A$ $V_{CC} >= 2.7\text{ V}, I_{SOURCE} = 500\text{ }\mu A$ $V_{CC} >= 4.5\text{ V}, I_{SOURCE} = 800\text{ }\mu A$
OPEN-DRAIN OUTPUT (ADM6320, ADM6321, ADM6322)					
$\overline{\text{RESET}}$ Output Voltage		0.3 0.3 0.3 0.4		V	$V_{CC} >= 1.0\text{ V}, I_{SINK} = 50\text{ }\mu A$ $V_{CC} >= 1.2\text{ V}, I_{SINK} = 100\text{ }\mu A$ $V_{CC} >= 2.7\text{ V}, I_{SINK} = 1.2\text{ mA}$ $V_{CC} >= 4.5\text{ V}, I_{SINK} = 3.2\text{ mA}$
Open-Drain Reset Output Leakage Current		1		μA	
WATCHDOG INPUT (ADM6316, ADM6317, ADM6318, ADM6320, ADM6321)					
Watchdog Timeout Period	4.3 71 1.12 17.9	6.3 102 1.6 25.6	9.3 153 2.4 38.4	ms ms s s	ADM63_W ADM63_X ADM63_Y ADM63_Z
WDI Pulse Width	50			ns	$V_{IL} = 0.3 \times V_{CC}, V_{IH} = 0.7 \times V_{CC}$

ADM6316/ADM6317/ADM6318/ADM6319/ADM6320/ADM6321/ADM6322

Parameter	Min	Typ	Max	Unit	Test Conditions/Comments
WDI Input Threshold	0.3 × V _{CC}		0.7 × V _{CC}	V	
WDI Input Current	120 −20	160 −15		μA μA	V _{WDI} = V _{CC} , time average V _{WDI} = 0, time average
MANUAL RESET INPUT (ADM6316, ADM6317, ADM6319, ADM6320, ADM6322)					
MR Input Threshold	0.8		2.0	V	V _{TH} > 4.0 V
	0.3 × V _{CC}		0.7 × V _{CC}	V	V _{TH} > 4.0 V
	1			μs	V _{TH} < 4.0 V
MR Input Pulse Width		100		ns	V _{TH} < 4.0 V
MR Glitch Rejection	35	52	75	kΩ	
MR Pull-up Resistance		230		ns	V _{CC} = 5V
MR to Reset Delay					

ADM6316/ADM6317/ADM6318/ADM6319/ADM6320/ADM6321/ADM6322

ABSOLUTE MAXIMUM RATINGS

T_A = 25°C, unless otherwise noted.

Table 3.

Parameter	Rating
V _{CC}	-0.3 V to +6 V
RESET (ADM6320, ADM6321, ADM6322)	-0.3 V to +6 V
Output Current (RESET, <u>RESET</u>)	20 mA
Operating Temperature Range	-40°C to +85°C
Storage Temperature Range	-65°C to +125°C
θ _{JA} Thermal Impedance, SOT-23	270°C/W
Lead Temperature	
Soldering (10 sec)	300°C
Vapour Phase (60 sec)	215°C
Infrared (15 sec)	220°C

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ESD CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although this product features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.



ADM6316/ADM6317/ADM6318/ADM6319/ADM6320/ADM6321/ADM6322

PIN CONFIGURATIONS AND FUNCTION DESCRIPTIONS

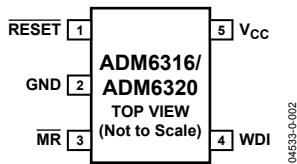


Figure 2. ADM6316/ADM6320 Pin Configuration

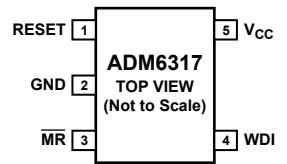


Figure 3. ADM6317 Pin Configuration

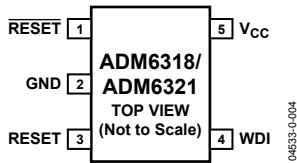


Figure 4. ADM6318/ADM6321 Pin Configuration

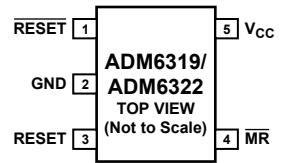


Figure 5. ADM6319/ADM6322 Pin Configuration

Table 4. Pin Function Descriptions

Pin No.	Mnemonic	Description
1	RESET (ADM6316/ADM6318/ ADM6319/ADM6320/ADM6321/ ADM6322)	Active-Low Reset Output. Asserted whenever V_{CC} is below the reset threshold, V_{TH} . Push-Pull Output Stage for the ADM6316/ADM6318/ADM6319. Open-Drain Output Stage for the ADM6320/ADM6321/ADM6322.
2	RESET (ADM6317)	Active-High, Push-Pull Reset Output.
3	GND	Ground.
3	MR (ADM6316/ADM6317/ ADM6320)	Manual Reset Input. This is an active-low input which, when forced low for at least 1 μ s, generates a reset. It features a 52 k Ω internal pull-up.
3	RESET (ADM6318/ADM6319/ ADM6321/ADM6322)	Active-High, Push-Pull Reset Output.
4	WDI (ADM6316/ADM6317/ ADM6318/ADM6320/ADM6321)	Watchdog Input. Generates a reset if the logic level on the pin remains low or high for the duration of the watchdog timeout. The timer is cleared if a logic transition occurs on this pin or if a reset is generated. Leave floating to disable the watchdog timer.
4	MR (ADM6319/ADM6322)	Manual Reset Input.
5	Vcc	Power Supply Voltage Being Monitored.

ADM6316/ADM6317/ADM6318/ADM6319/ADM6320/ADM6321/ADM6322

TYPICAL PERFORMANCE CHARACTERISTICS

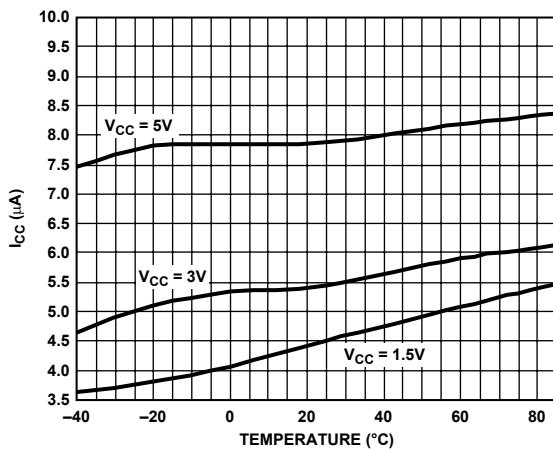


Figure 6. Supply Current vs. Temperature
(ADM6316/ADM6317/ADM6318/ADM6320/ADM6321)

04533-0-006

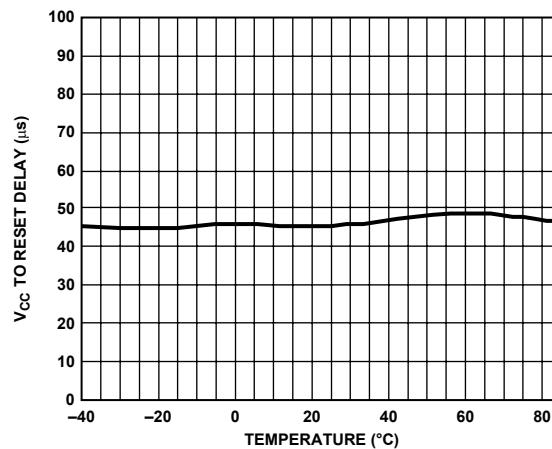


Figure 9. V_{CC} Falling to Reset Propagation Delay vs. Temperature

04533-0-009

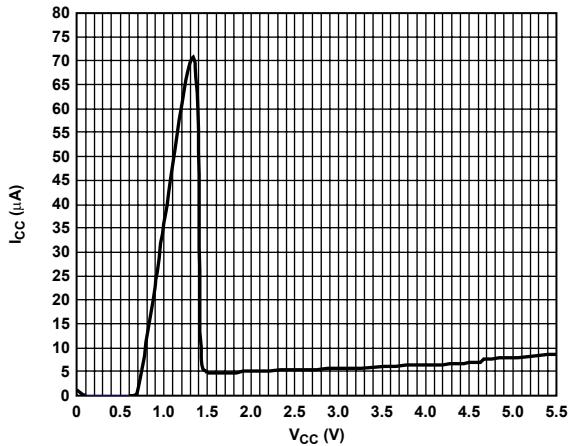


Figure 7. Supply Current vs. Supply Voltage

04533-0-007

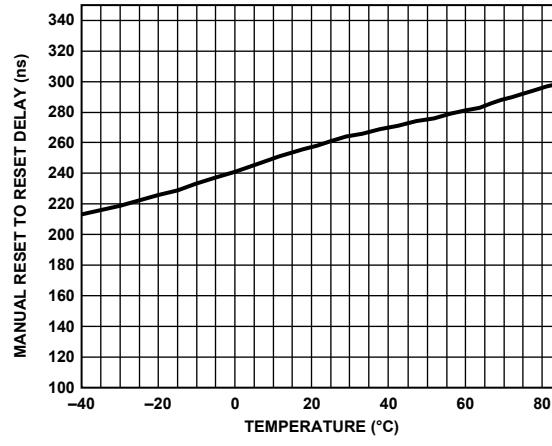


Figure 10. Manual Reset to Reset Propagation Delay vs. Temperature
(ADM6316/ADM6317/ADM6319/ADM6320/ADM6322)

04533-0-010

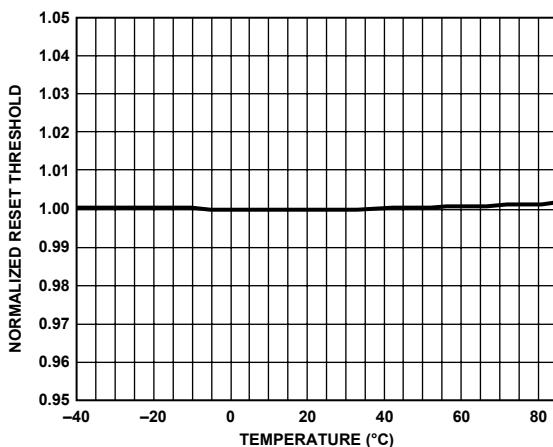


Figure 8. Normalized Reset Threshold vs. Temperature

04533-0-008

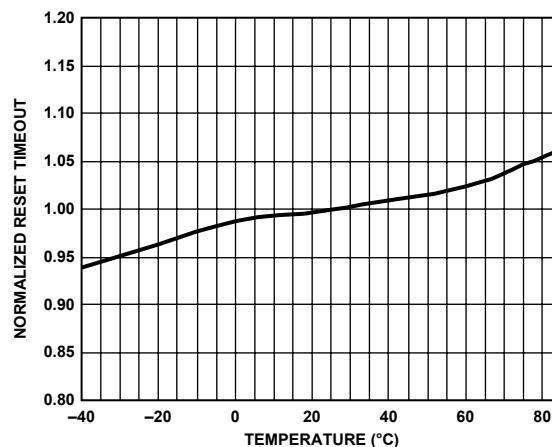


Figure 11. Normalized Reset Timeout Period vs. Temperature

04533-0-011

ADM6316/ADM6317/ADM6318/ADM6319/ADM6320/ADM6321/ADM6322

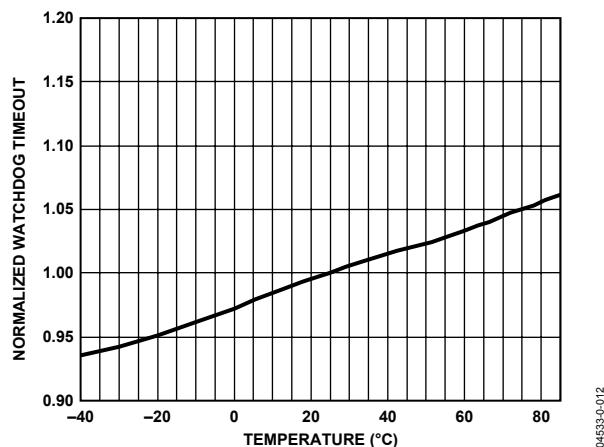


Figure 12. Normalized Watchdog Timeout Period vs. Temperature
(ADM6316/ADM6317/ADM6318/ADM6320/ADM6321)

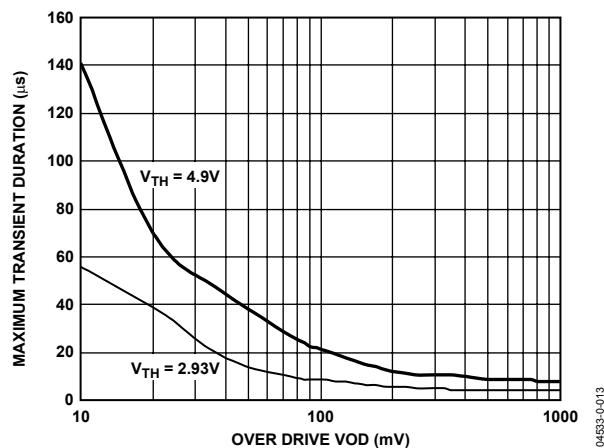


Figure 13. Maximum V_{CC} Transient Duration vs. Reset Threshold Overdrive

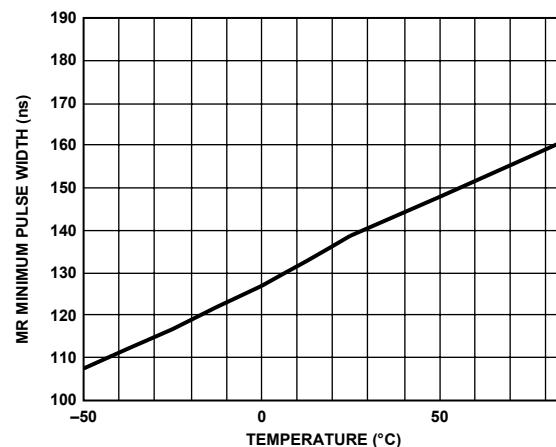


Figure 14. Manual Reset Minimum Pulse Width vs. Temperature
(ADM6316/ADM6317/ADM6319/ADM6320/ADM6322)

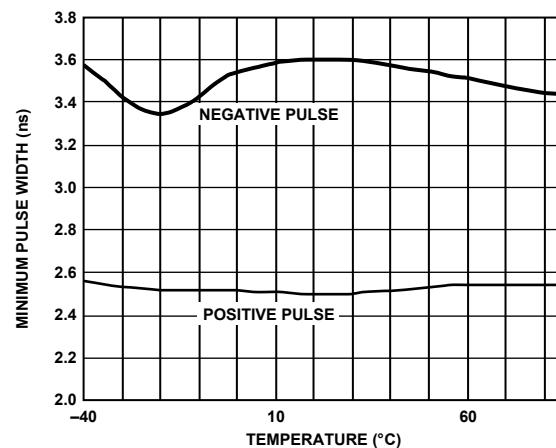


Figure 15. Watchdog Input Minimum Pulse Width vs. Temperature
(ADM6316/ADM6317/ADM6318/ADM6320/ADM6321)

ADM6316/ADM6317/ADM6318/ADM6319/ADM6320/ADM6321/ADM6322

Table 5. Reset Threshold Options

Part No.	T_A = +25°C			T_A = -40°C to +85°C	
	Min	Typ	Max	Min	Max
ADM63 ___ 50	4.925	5.000	5.075	4.875	5.125
ADM63 ___ 49	4.827	4.900	4.974	4.778	5.023
ADM63 ___ 48	4.728	4.800	4.872	4.680	4.920
ADM63 ___ 47	4.630	4.700	4.771	4.583	4.818
ADM63 ___ 46	4.561	4.630	4.699	4.514	4.746
ADM63 ___ 45	4.433	4.500	4.568	4.388	4.613
ADM63 ___ 44	4.314	4.390	4.446	4.270	4.490
ADM63 ___ 43	4.236	4.300	4.365	4.193	4.408
ADM63 ___ 42	4.137	4.200	4.263	4.095	4.305
ADM63 ___ 41	4.039	4.100	4.162	3.998	4.203
ADM63 ___ 40	3.940	4.00	4.060	3.900	4.100
ADM63 ___ 39	3.842	3.900	3.959	3.803	3.998
ADM63 ___ 38	3.743	3.800	3.857	3.705	3.895
ADM63 ___ 37	3.645	3.700	3.756	3.608	3.793
ADM63 ___ 36	3.546	3.600	3.654	3.510	3.690
ADM63 ___ 35	3.448	3.500	3.553	3.413	3.588
ADM63 ___ 34	3.349	3.400	3.451	3.315	3.485
ADM63 ___ 33	3.251	3.300	3.350	3.218	3.383
ADM63 ___ 32	3.152	3.200	3.248	3.120	3.280
ADM63 ___ 31	3.034	3.080	3.126	3.003	3.157
ADM63 ___ 30	2.955	3.000	3.045	2.925	3.075
ADM63 ___ 29	2.886	2.930	2.974	2.857	3.000
ADM63 ___ 28	2.758	2.800	2.842	2.730	2.870
ADM63 ___ 27	2.660	2.700	2.741	2.633	2.768
ADM63 ___ 26	2.591	2.630	2.669	2.564	2.696
ADM63 ___ 25	2.463	2.500	2.538	2.438	2.563

Table 6. Reset Timeout Options

Suffix	Min	Typ	Max	Unit
A	1	1.6	2	ms
B	20	30	40	ms
C	140	200	280	ms
D	1.12	1.60	2.24	s


Table 7. Watchdog Timer Operations

Suffix	Min	Typ	Max	Unit
W	4.3	6.3	9.3	ms
X	71	102	153	ms
Y	1.12	1.6	2.24	s
Z	17.9	25.6	38.4	s

Table 8. Standard Models

Model	Reset Threshold (V)	Minimum Reset Timeout (ms)	Typical Watchdog Timeout (s)
ADM6316CY29ARJ	2.93	140	1.6
ADM6316CY46ARJ	4.63	140	1.6
ADM6318CY46ARJ	4.63	140	1.6
ADM6319C46ARJ	4.63	140	1.6
ADM6320CY29ARJ	2.93	140	1.6
ADM6320CY46ARJ	4.63	140	1.6
ADM6321CY46ARJ	4.63	140	1.6
ADM6322C46ARJ	4.63	140	1.6

OUTLINE DIMENSIONS

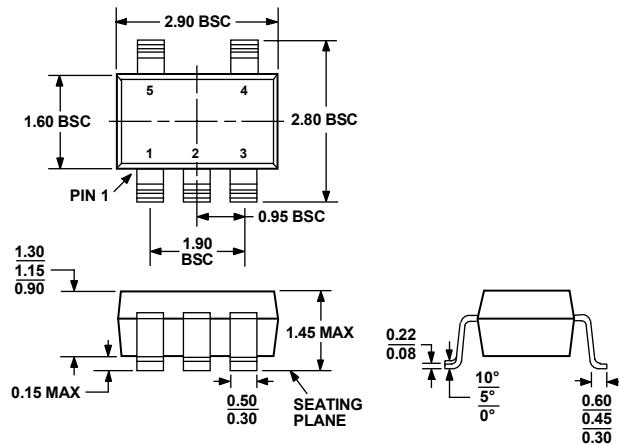

COMPLIANT TO JEDEC STANDARDS MO-178AA

Figure 16. 5-Lead Small Outline Transistor Package [SOT-23]

(RJ-5)

Dimensions shown in millimeters

ADM6316/ADM6317/ADM6318/ADM6319/ADM6320/ADM6321/ADM6322

ORDERING GUIDE

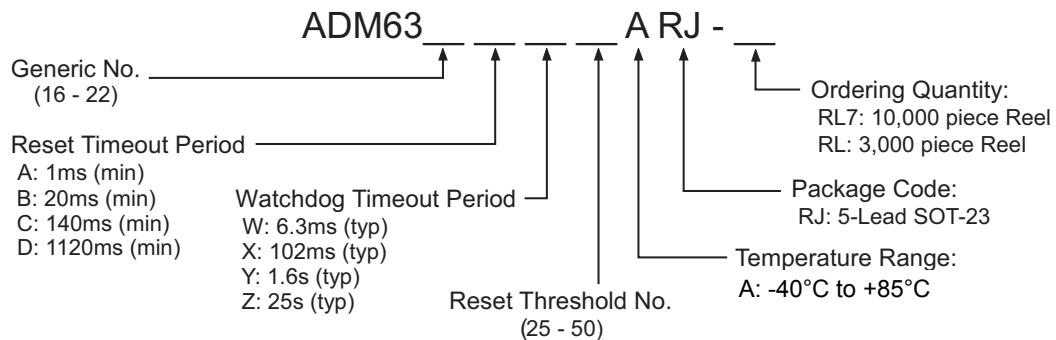


Figure 17. Ordering Code Structure

Model ¹²	Temperature Range	Quantity	Package Option	Branding
ADM6316 ____ ARJ-RL7	-40°C to +85°C	3k	SOT-23-5	N00
ADM6317 ____ ARJ-RL7	-40°C to +85°C	3k	SOT-23-5	N01
ADM6318 ____ ARJ-RL7	-40°C to +85°C	3k	SOT-23-5	N02
ADM6319 ____ ARJ-RL7	-40°C to +85°C	3k	SOT-23-5	N03
ADM6320 ____ ARJ-RL7	-40°C to +85°C	3k	SOT-23-5	N04
ADM6321 ____ ARJ-RL7	-40°C to +85°C	3k	SOT-23-5	N05
ADM6322 ____ ARJ-RL7	-40°C to +85°C	3k	SOT-23-5	N06

¹ Complete the ordering code by inserting reset timeout, watchdog timeout (ADM6316/17/18/20/21) and reset threshold suffixes from tables 5 to 7.

² Contact the factory for the availability of nonstandard models. See Table 8 for a list of standard models.