

Hybrid Junction 2 MHz - 2 GHz

H-9

V2.00

Features


- 0° - 180° Hybrid with 10 Octave Bandwidth
- 30 dB Minimum Isolation
- Low VSWR
- Impedance: 50 Ohms Nom.
- Input Power: 2-20 MHz: 5 W. Max.
20-2000 MHz: 25 W. Max.
- MIL-STD-883 Screening Available

Guaranteed Specifications* (From -55°C to +85°C)

Frequency Range	2-2000 MHz	
Insertion Loss (Less Coupling)	2 - 5 MHz	1.7 dB Max.
	5 - 20 MHz	1.7 dB Max.
	20 - 300 MHz	0.7 dB Max.
	300 - 1000 MHz	1.4 dB Max.
	1000 - 1500 MHz	2.25 dB Max.
Isolation	1500 - 2000 MHz	2.5 dB Max.
	2 - 20 MHz	35 dB Min.
	20 - 300 MHz	40 dB Min.
	300 - 1000 MHz	30 dB Min.
Amplitude Balance	1000 - 2000 MHz	30 dB Min.
	2 - 2000 MHz	0.5 dB Max.
VSWR	2 - 5 MHz	3.5:1 Max.
	5 - 20 MHz	2.4:1 Max.
	20 - 300 MHz	1.4:1 Max.
	300 - 1000 MHz	1.7:1 Max.
	1000 - 2000 MHz	1.7:1 Max.
Phase Unbalance	2 - 300 MHz	2° Max.
	300 - 1000 MHz	3° Max.
	1000 - 2000 MHz	7° Max.

* All specifications apply with 50 ohm source and load impedance.
This product contains elements protected by United States Patent
Number 3,325,587.

Functional Diagram



Ordering Information

Part Number	Package
H-9 N	Connectorized
H-9 SMA	Connectorized

Specifications Subject to Change Without Notice.


M/A-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883

■ Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451




■ Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020

C-21

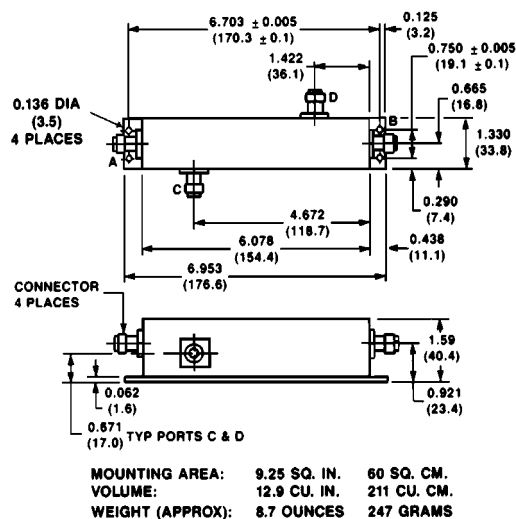

Dimensions in () are in mm.
Unless Otherwise Noted: .xxx = ± 0.015
(.x = ± 0.4)

Typical Performance

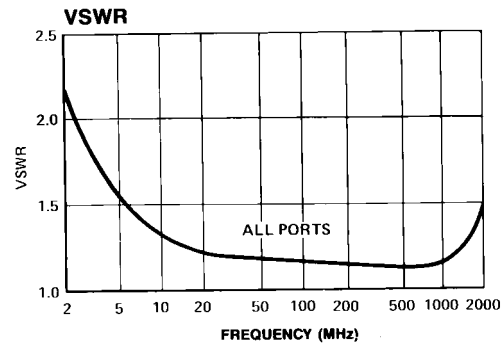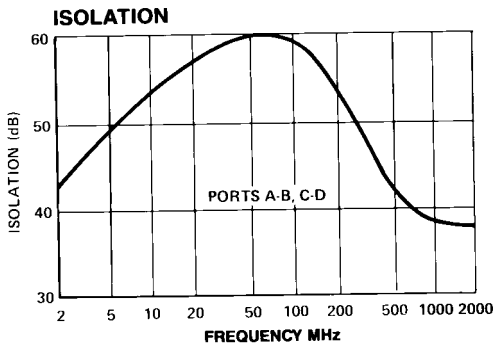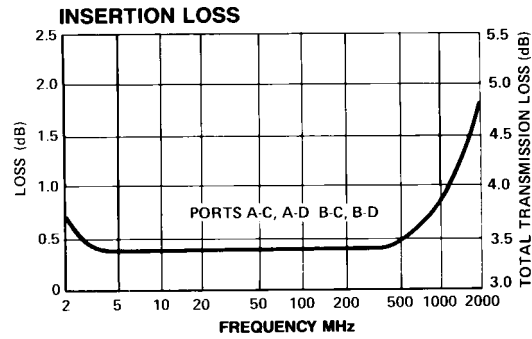

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883

■ Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

■ Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020