

Fusible resistors

NFR25/25H

FEATURES

- Overload protection without risk of fire
- Wide range of overload currents.

APPLICATIONS

- Audio
- Video.

DESCRIPTION

A homogeneous film of metal alloy is deposited on a high grade ceramic body. After a helical groove has been cut in the resistive layer, tinned connecting wires of electrolytic copper are welded to the end-caps. The resistors are coated with a grey, flame retardant lacquer which provides electrical, mechanical, and climatic protection. The encapsulation is resistant to all cleaning solvents in accordance with "MIL-STD-202E, method 215", and "IEC 60068-2-45".

ORDERING INFORMATION

Ordering code (12NC)

- The resistors have a 12-digit ordering code starting with 23
- The subsequent 7 digits indicate the resistor type and packaging; see Table 1.
- The remaining 3 digits indicate the resistance values:
 - The first 2 digits indicate the resistance value.
 - The last digit indicates the resistance decade in accordance with Table 2.

QUICK REFERENCE DATA

DESCRIPTION	VALUE	
	NFR25	NFR25H
Resistance range	1 Ω to 15 k Ω	
Resistance tolerance and series	$\pm 5\%$; E24 series	
Maximum dissipation at $T_{amb} = 70\text{ }^{\circ}\text{C}$	0.33 W	0.5 W
Thermal resistance (R_{th})	240 K/W	150 K/W
Temperature coefficient:		
1 $\Omega \leq R \leq 4.7\text{ }\Omega$	$\leq \pm 200 \times 10^{-6}/\text{K}$	$\leq \pm 200 \times 10^{-6}/\text{K}$
4.7 $\Omega < R \leq 15\text{ }\Omega$	$\leq \pm 200 \times 10^{-6}/\text{K}$	$\leq \pm 100 \times 10^{-6}/\text{K}$
15 $\Omega < R \leq 15\text{ k}\Omega$	$\leq \pm 100 \times 10^{-6}/\text{K}$	$\leq \pm 100 \times 10^{-6}/\text{K}$
Maximum permissible voltage (DC or RMS)	250 V	350 V
Basic specifications	IEC 60115-1 and 60115-2	
Climatic category (IEC 60068)	55/155/56	
Stability after:		
load	$\Delta R/R$ max.: $\pm 1\% + 0.05\text{ }\Omega$	
climatic tests	$\Delta R/R$ max.: $\pm 1\% + 0.05\text{ }\Omega$	
soldering	$\Delta R/R$ max.: $\pm 0.25\% + 0.05\text{ }\Omega$	

Table 1 Ordering code indicating resistor type and packaging

TYPE	ORDERING CODE 23..			
	BANDOLIER IN AMMOPACK			BANDOLIER ON REEL
	RADIAL TAPED	STRAIGHT LEADS		STRAIGHT LEADS
	4000 units	1000 units	5000 units	5000 units
NFR25	06 204 03...	22 205 13...	22 205 33...	22 205 23...
NFR25H	06 207 03...	22 207 13...	22 207 33...	22 207 23...

Table 2 Last digit of 12NC

RESISTANCE DECADE	LAST DIGIT
1 to 9.1 Ω	8
10 to 91 Ω	9
100 to 910 Ω	1
1 to 9.1 k Ω	2
10 to 15 k Ω	3

ORDERING EXAMPLE

The ordering code for a NFR25 resistor with value 750 Ω , supplied on a bandolier of 1000 units in ammopack is: 2322 205 13751.

Fusible resistors

NFR25/25H

FUNCTIONAL DESCRIPTION

Product characterization

Standard values of nominal resistance are taken from the E24 series for resistors with a tolerance of $\pm 5\%$. The values of the E24 series are in accordance with "IEC publication 60063".

Limiting values

TYPE	LIMITING VOLTAGE ⁽¹⁾ (V)	LIMITING POWER (W)
NFR25	250	0.33
NFR25H	350	0.5

Note

- The maximum voltage that may be continuously applied to the resistor element, see "IEC publication 60115-1".

The maximum permissible hot-spot temperature is 155 °C.

DERATING

The power that the resistor can dissipate depends on the operating temperature; see Fig.1.

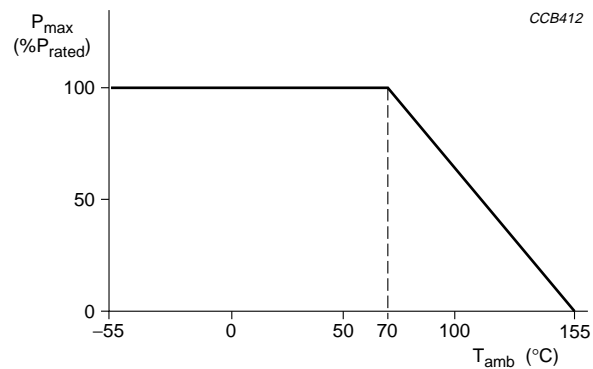


Fig.1 Maximum dissipation (P_{max}) in percentage of rated power as a function of the ambient temperature (T_{amb}).




Fusible resistors

NFR25/25H

FUSING CHARACTERISTIC

The resistors will fuse without the risk of fire and within an indicated range of overload. Fusing means that the resistive value of the resistor increases at least 100 times; see Figs 2, 3 and 4.

The fusing characteristic is measured under constant voltage.

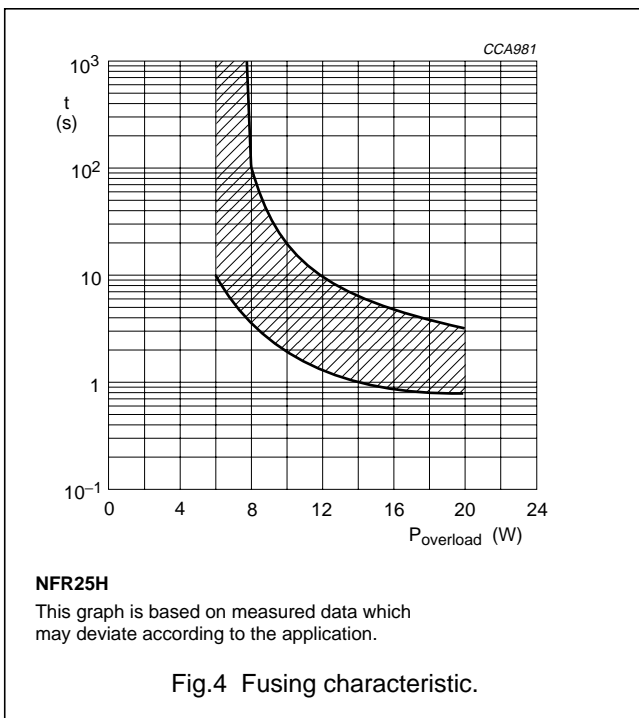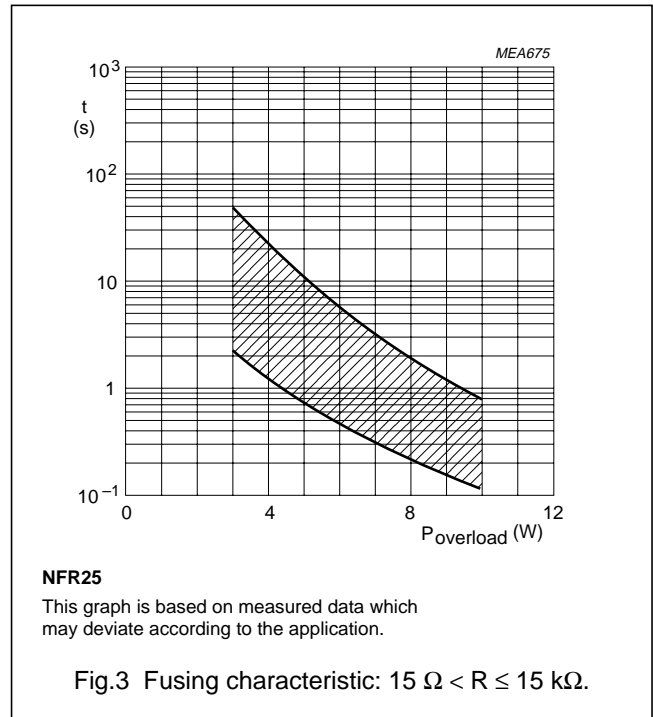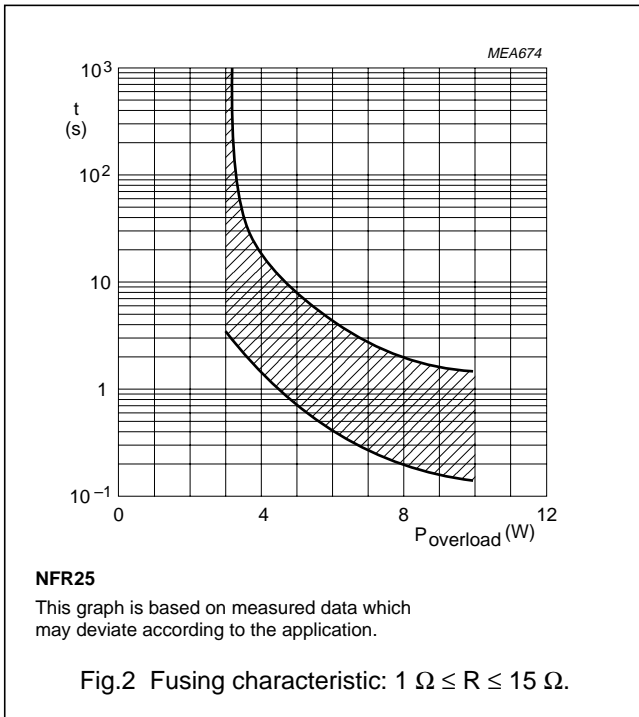

Fusible resistors

NFR25/25H

PULSE LOADING CAPABILITIES

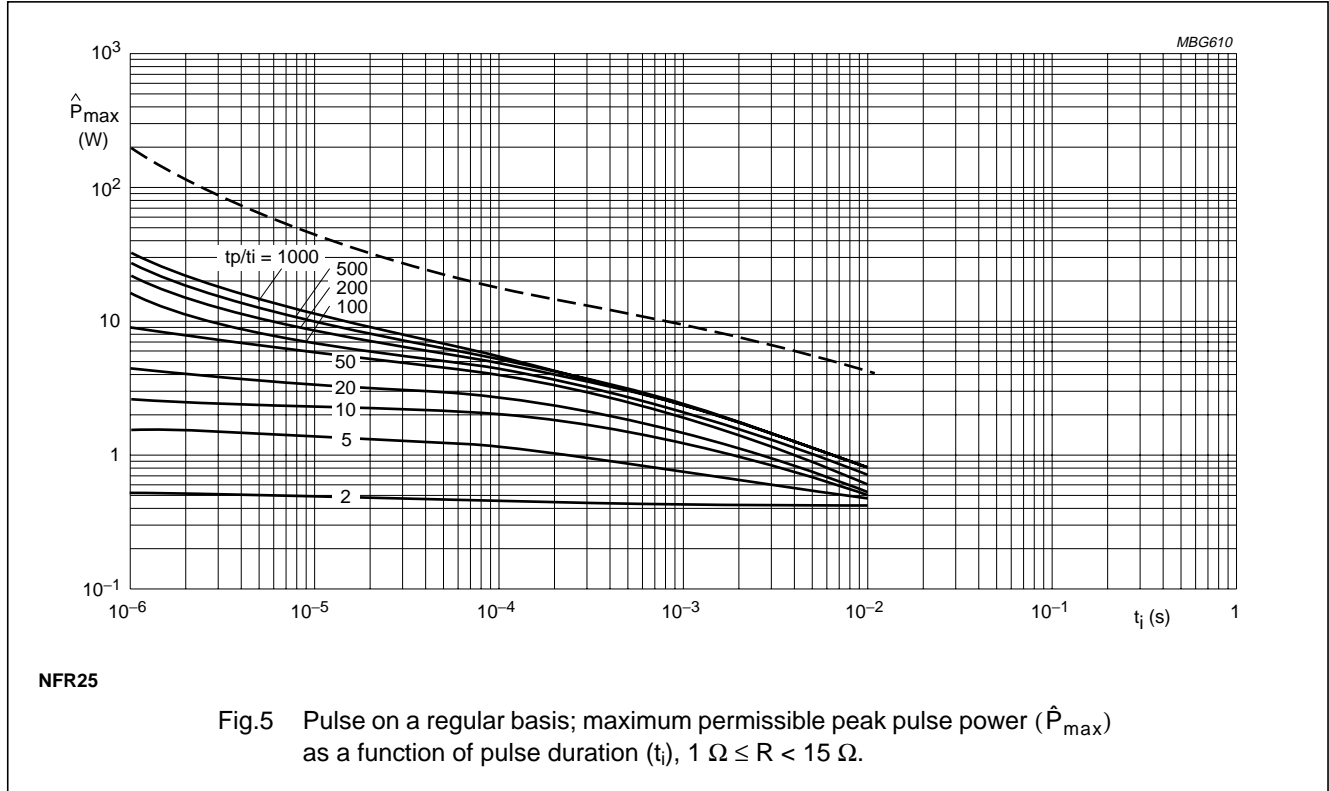


Fig.5 Pulse on a regular basis; maximum permissible peak pulse power (\hat{P}_{max}) as a function of pulse duration (t_i), $1 \Omega \leq R < 15 \Omega$.



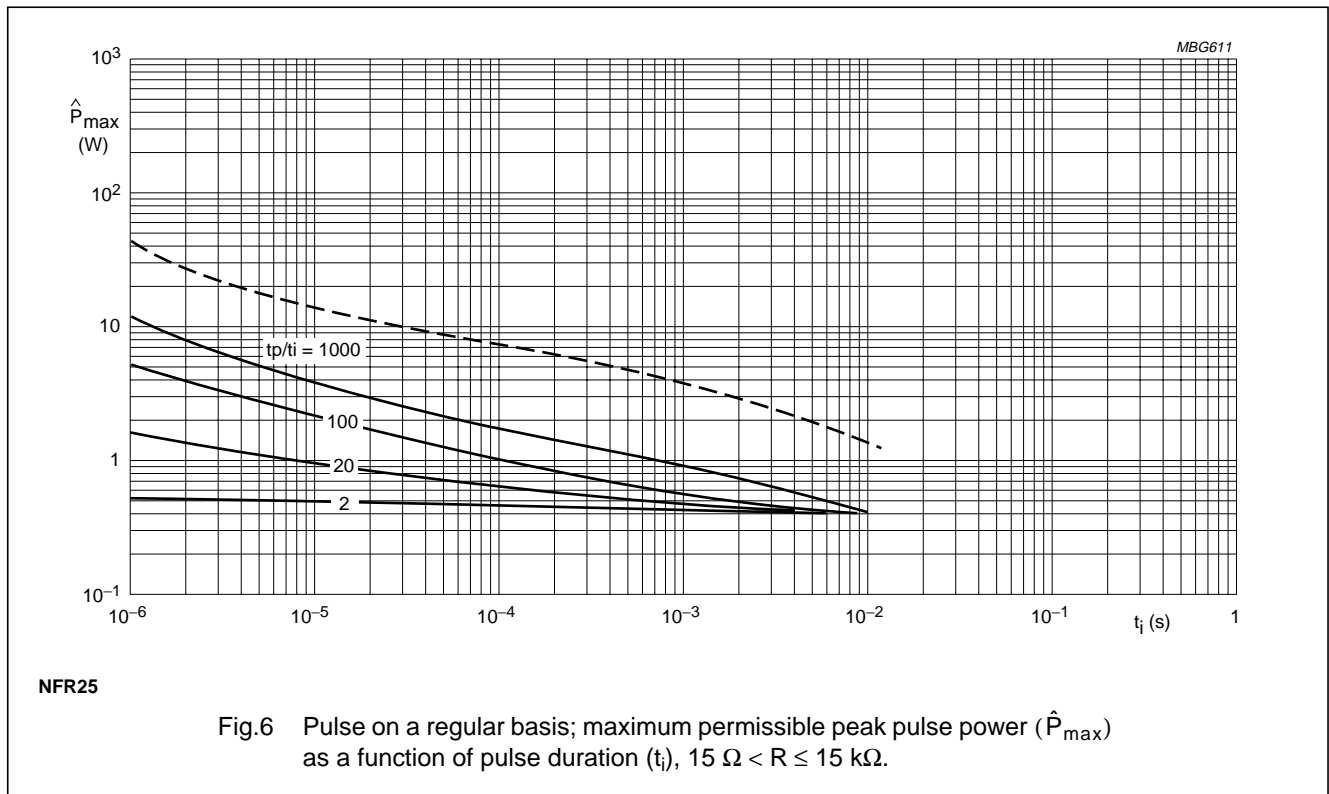


Fig.6 Pulse on a regular basis; maximum permissible peak pulse power (\hat{P}_{max}) as a function of pulse duration (t_i), $15 \Omega < R \leq 15 \text{ k}\Omega$.


Fusible resistors

NFR25/25H

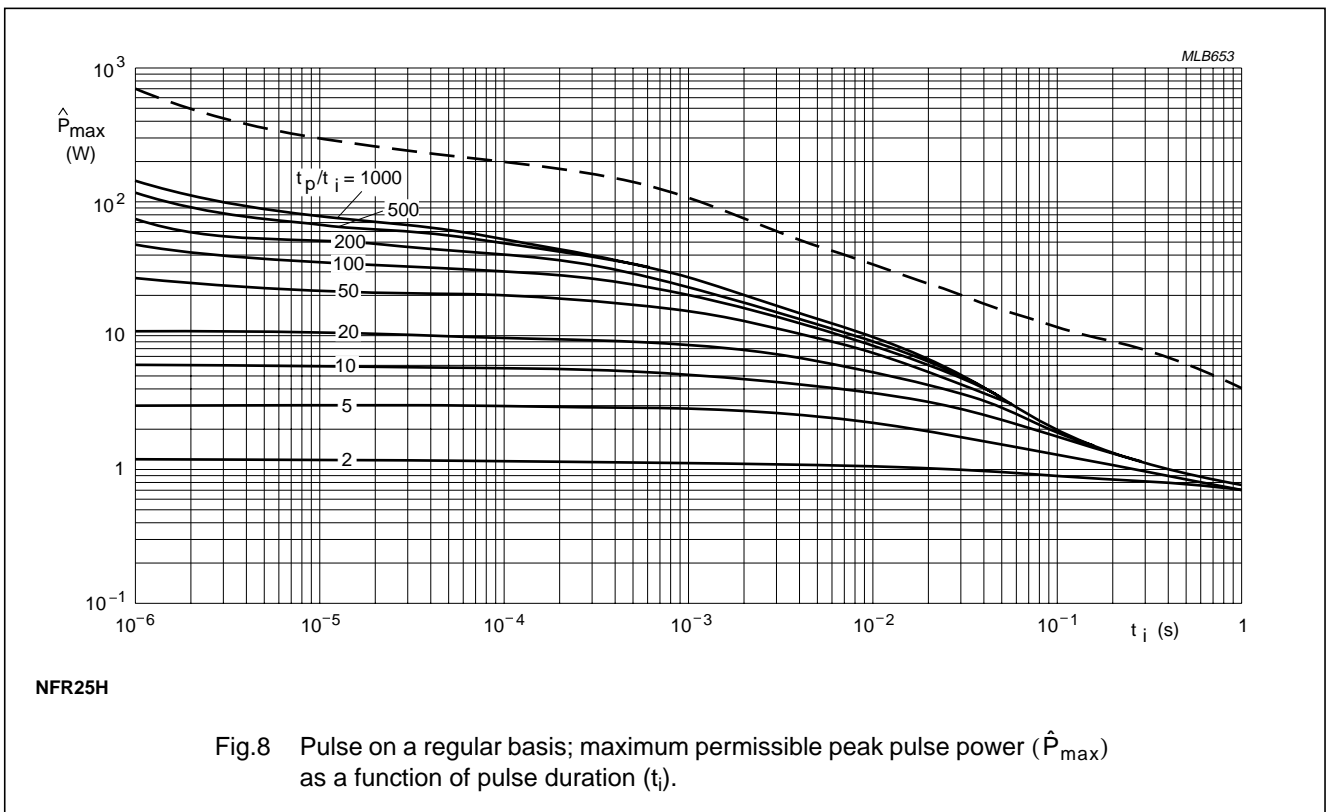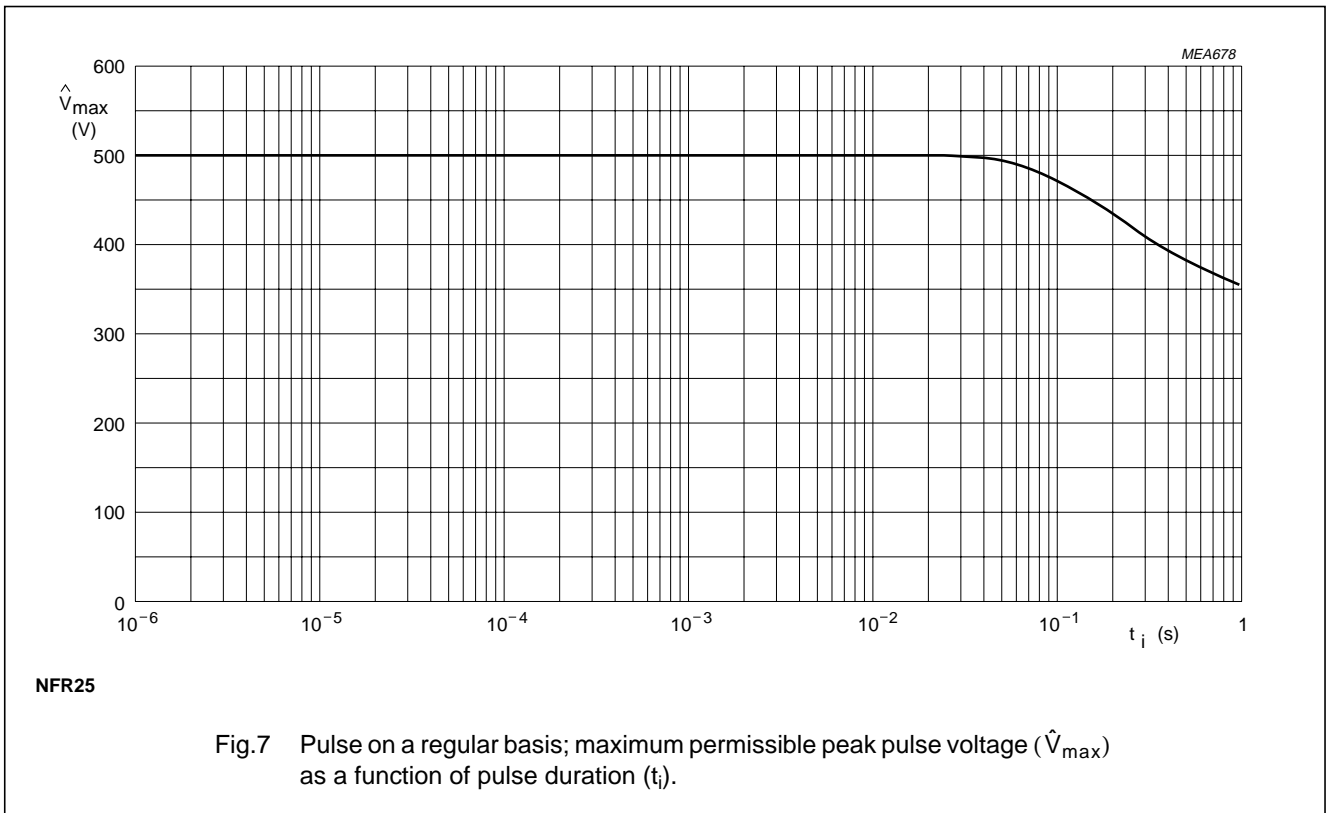

Fusible resistors





NFR25/25H

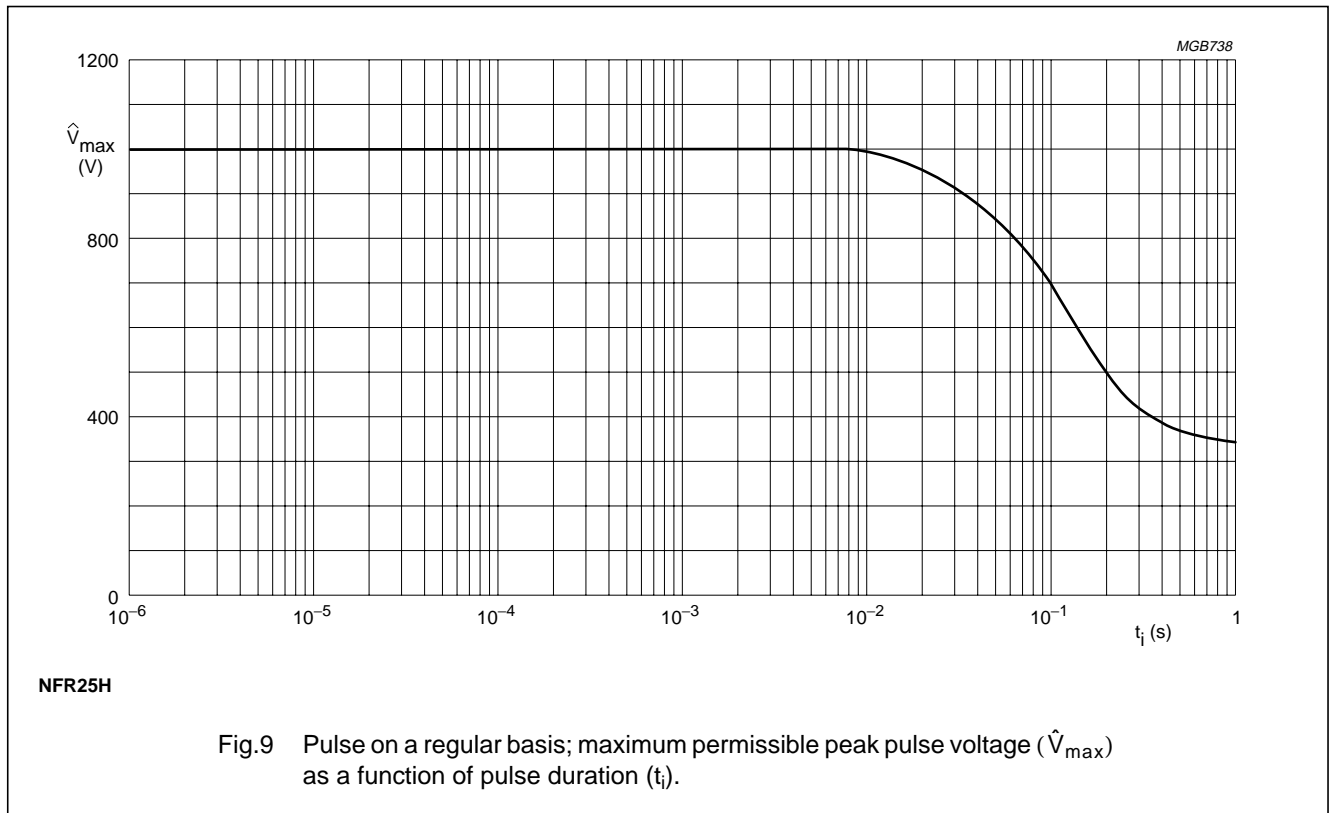

Fusible resistors

NFR25/25H

Application information

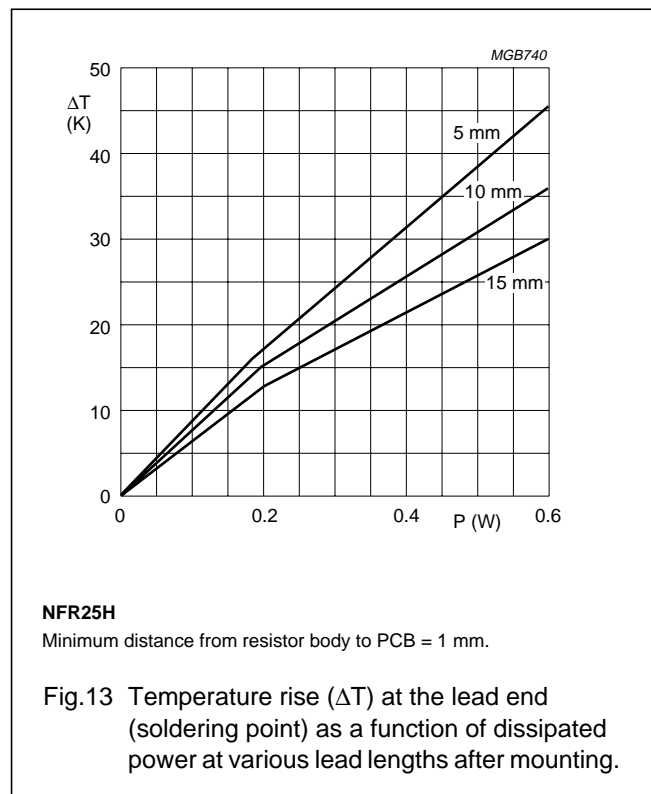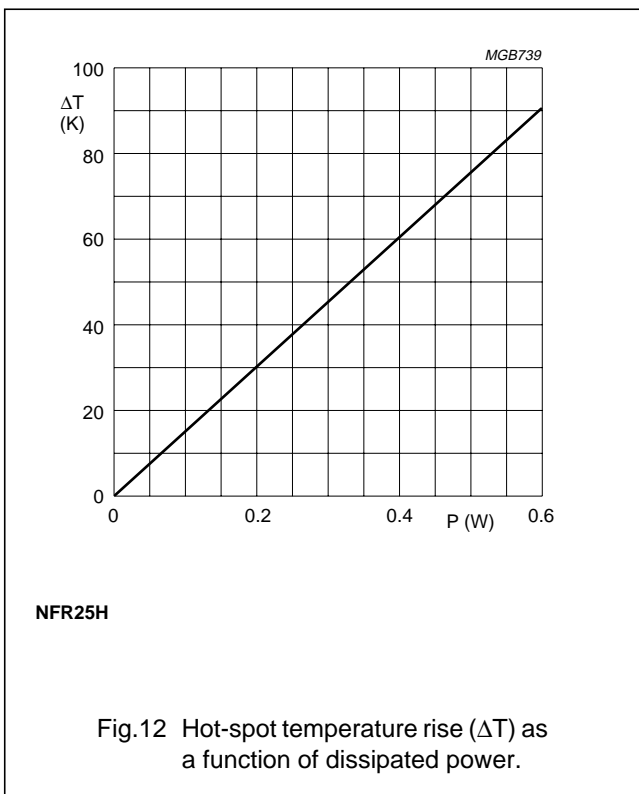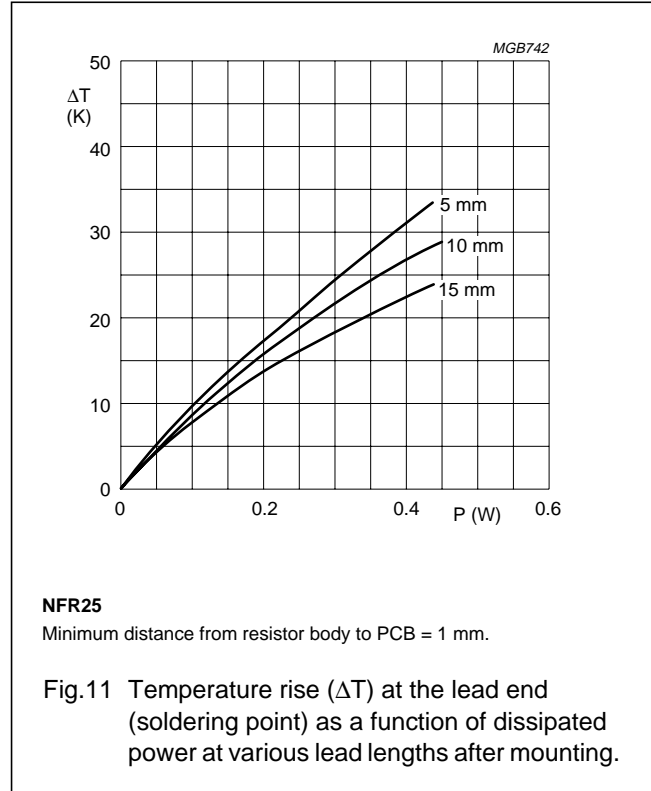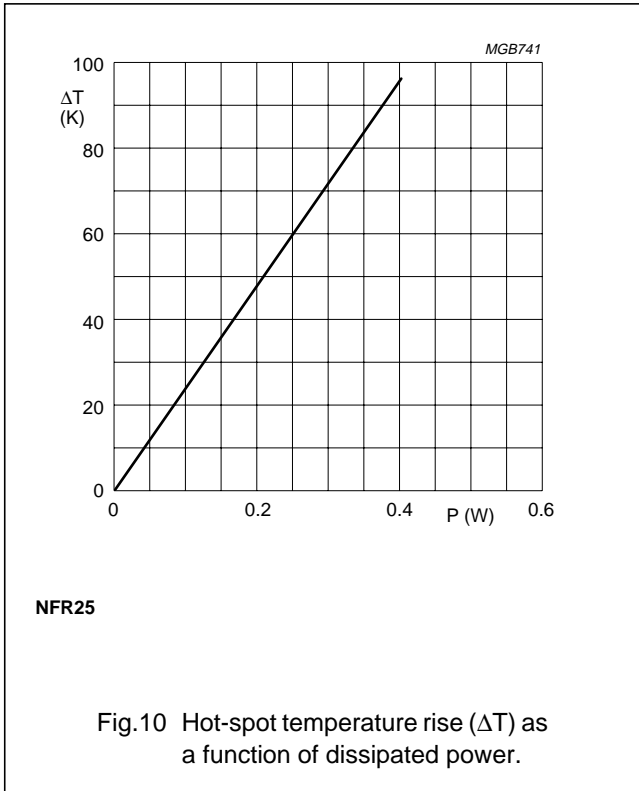

Fusible resistors

NFR25/25H

MECHANICAL DATA

Mass per 100 units

TYPE	MASS (g)
NFR25	25
NFR25H	

Marking

The nominal resistance and tolerance are marked on the resistor using four coloured bands in accordance with IEC publication 60062 "Colour codes for fixed resistors".

For ease of recognition a fifth ring is added, which is violet for type NFR25 and white for type NFR25H.

Outlines

The length of the body (L_1) is measured by inserting the leads into holes of two identical gauge plates and moving these plates parallel to each other until the resistor body is clamped without deformation ("IEC publication 60294").

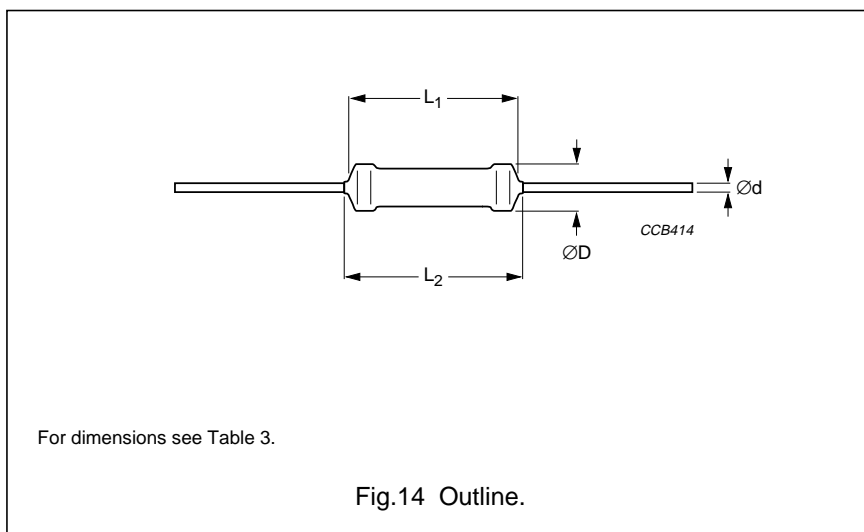


Table 3 Resistor type and relevant physical dimensions; see Fig.14

TYPE	ØD MAX. (mm)	L ₁ MAX. (mm)	L ₂ MAX. (mm)	Ød (mm)
NFR25	2.5	6.5	7.5	0.58 ±0.05
NFR25H				

Fusible resistors

NFR25/25H

TESTS AND REQUIREMENTS

Essentially all tests are carried out in accordance with the schedule of "IEC publication 60115-1", category **LCT/UCT/56** (rated temperature range: **Lower Category Temperature, Upper Category Temperature**; damp heat, long term, **56** days). The testing also covers the requirements specified by EIA and EIAJ.

The tests are carried out in accordance with IEC publication 60068, "Recommended basic climatic and mechanical robustness testing procedure for electronic components" and under standard atmospheric conditions according to "IEC 60068-1", subclause 5.3.

Unless otherwise specified the following values apply:

Temperature: 15 °C to 35 °C

Relative humidity: 45% to 75%

Air pressure: 86 kPa to 106 kPa.

In Table 4 the tests and requirements are listed with reference to the relevant clauses of "IEC publications 60115-1 and 60068"; a short description of the test procedure is also given. In some instances deviations from the IEC recommendations were necessary for our method of specifying. For inflammability requirements reference is made to "IEC 60115-1" and to "EN 140000, appendix D".

All soldering tests are performed with mildly activated flux.

Table 4 Test procedures and requirements

IEC 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS	
				NFR25	NFR25H
Tests in accordance with the schedule of IEC publication 60115-8					
4.4.1		visual examination		no holes; clean surface; no damage	
4.4.2		dimensions (outline)	gauge (mm)	see Table 3	
4.5		resistance	applied voltage (+0/-10%): R < 10 Ω: 0.1 V 10 Ω ≤ R < 100 Ω: 0.3 V 100 Ω ≤ R < 1 kΩ: 1 V 1 kΩ ≤ R < 10 kΩ: 3 V 10 kΩ ≤ R ≤ 15 kΩ: 10 V	R – R _{nom} : max. ±5%	
4.18	Tb	resistance to soldering heat	thermal shock: 3 s; 350 °C; 6 mm from body	ΔR/R max.: ±0.25% + 0.05 Ω	
4.29	45 (Xa)	component solvent resistance	isopropyl alcohol or H ₂ O followed by brushing in accordance with "MIL 202 F"	no visual damage	
4.17	Ta	solderability	2 s; 235 °C	good tinning; no damage	
4.7		voltage proof on insulation	2 × maximum voltage (RMS) during 1 minute; metal block method	no breakdown or flashover	
4.16	U	robustness of terminations:			
4.16.2	Ua	tensile all samples	load 10 N; 10 s	number of failures <10 × 10 ⁻⁶	
4.16.3	Ub	bending half number of samples	load 5 N; 4 × 90°	number of failures <10 × 10 ⁻⁶	
4.16.4	Uc	torsion other half of samples	3 × 360° in opposite directions	no damage ΔR/R max.: ±0.25% + 0.05 Ω	

Fusible resistors

NFR25/25H

IEC 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS	
				NFR25	NFR25H
4.20	Eb	bump	3 × 1500 bumps in 3 directions; 40 g	no damage $\Delta R/R$ max.: $\pm 0.25\% + 0.05 \Omega$	
4.22	Fc	vibration	frequency 10 to 500 Hz; displacement 1.5 mm or acceleration 10 g; 3 directions; total 6 hours (3 × 2 hours)	no damage $\Delta R/R$ max.: $\pm 0.25\% + 0.05 \Omega$	
4.19	14 (Na)	rapid change of temperature	30 minutes at LCT and 30 minutes at UCT; 5 cycles	no visual damage $\Delta R/R$ max.: $\pm 0.25\% + 0.05 \Omega$	
4.23 4.23.3 4.23.6	30 (D) 30 (D)	climatic sequence: damp heat (accelerated) 1 st cycle damp heat (accelerated) remaining cycles	6 days; 55 °C; 95 to 98% RH	R_{ins} min.: $10^3 M\Omega$ $\Delta R/R$ max.: $\pm 1\% + 0.05 \Omega$	
4.24.2	3 (Ca)	damp heat (steady state) (IEC)	56 days; 40 °C; 90 to 95% RH; loaded with $0.01 P_n$ (IEC steps: 4 to 100 V)	R_{ins} max.: 1000 M Ω $\Delta R/R$ max.: $\pm 1\% + 0.05 \Omega$	
4.25.1		endurance (at 70 °C)	1000 hours; loaded with P_n or V_{max} ; 1.5 hours on and 0.5 hours off	$\Delta R/R$ max.: $\pm 1\% + 0.05 \Omega$	
4.23.2	27 (Ba)	endurance at upper category temperature	1000 hours; no load	$\Delta R/R$ max.: $\pm 1\% + 0.05 \Omega$	
4.8.4.2		temperature coefficient	at 20/LCT/20 °C and 20/UCT/20 °C ($TC \times 10^{-6}/K$): $1 \Omega \leq R \leq 4.7 \Omega$ $4.7 \Omega < R \leq 15 \Omega$ $15 \Omega < R \leq 15 k\Omega$	$\leq \pm 200 \times 10^{-6}/K$ $\leq \pm 200 \times 10^{-6}/K$ $\leq \pm 100 \times 10^{-6}/K$	$\leq \pm 200 \times 10^{-6}/K$ $\leq \pm 100 \times 10^{-6}/K$ $\leq \pm 100 \times 10^{-6}/K$
4.12		noise	"IEC publication 60195"	<0.1 $\mu V/V$	
4.26		accidental overload	cheese-cloth	nonflammable	
Other tests in accordance with IEC 60115 clauses and IEC 60068 test method					
4.17	20 (Tb)	solderability (after ageing)	8 hours steam or 16 hours 155 °C; leads immersed 6 mm for 2 ± 0.5 s in a solder bath at 235 ± 5 °C	good tinning ($\geq 95\%$ covered); no damage	
4.6.1.1		insulation resistance	maximum voltage 500 V (DC) after 1 minute; metal block method	R_{ins} min.: $10^4 M\Omega$	
see 2 nd amendment to "IEC 60115-1", Jan.'87		pulse load		see Figs 5, 6, 7, 8 and 9	