



Heat Flux Sensor Type 27160

RdF
CORPORATION

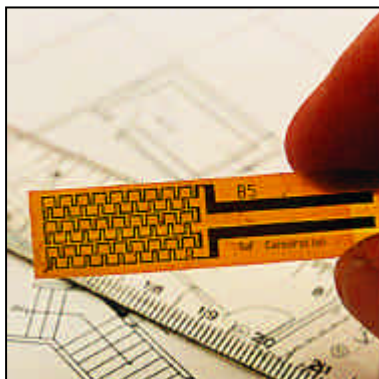

Heat Flow sensors allow precision measurements of heat transfer through any surface material. They are cemented onto a surface like strain gauges, and will give an accurate measurement of heat transfer using a DVM as an indicator.

- Effective with radiation, convection and conduction heat transfer
- Easily attached to flat or curved surfaces
- Non-invasive
- Solderable edge connections
- Supplied with calibration certificate and temperature correction graph

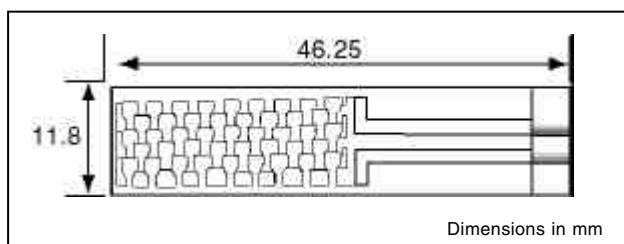

Specifications:

Nominal sensitivity	0.82 $\mu\text{V}/(\text{W}/\text{m}^2)$
Maximum recommended heat flux	95KW/m ²
Response time	0.6 Second
Thermal capacitance	400 J/(m ² • °C)
Thermal impedance	0.002 °C/(W/m ²)
Maximum operating temp.	150°C

Rhopoint Components Ltd

Tel: +44 (0) 870 608 1188 Fax: +44 (0) 870 241 2255

Germany: +49 (0) 692 199 8606 Fax: +49 (0) 692 199 8595

Email: sales@rhpointcomponents.com

Website: www.rhpointcomponents.com