

301-EU * & 302-EU ** Angle Die Grinders

- Compact design for work in confined areas.
- Self-locking throttle prevents accidental starts.
- Precision machined gearing for maximum power transfer.
- Ideal for grinding, parting, polishing, deburring and smoothing sharp edges

307A-EU & LA419-EU Mini Die Grinders *

- Compact, general purpose grinders for tyre buffing, metal finishing and weld dressing in confined areas.
- Safety lever prevents accidental starts.
- Front exhaust helps keep work surface clean.

308-EU Multi-purpose Die Grinder **

- Designed for parting, light weld grinding and smoothing sharp edges.
- Safety throttle and front exhaust.

344 Angle Grinder - 4" wheel capacity **

- Motor controller - Controls the speed and power of the tool for increased productivity and enhanced operator safety.
- Lightweight and durable composite housing.
- Rear exhaust directs air away from the workpiece. Optional piped-away exhaust available, part no. LG2-K284

LA421-EU & LA422-EU Angle Grinders **

- All purpose angle grinders suitable for metal dressing, rust removal, weld preparation and automotive bodywork fabrication.

- Wheel capacity 4" (LA421-EU) and 5" (LA422-EU)

- Accessories supplied with tools:




Arbor wrench	Part no. LA421-DG-40048
Flange nut wrench	Part no. LA421-AG-30054
4" wheel (with model LA421-EU)	Part no. LA421-AG-40059
5" wheel (with model LA422-EU)	Part no. LA422-AG-40059

LA429-EU Die Grinder Kit *

- Contains LA429-EU Grinder plus 10 different shank-mounted stones for flexibility to meet different die grinding applications.
- Standard accessories: 5 x 6 mm (1/4") and 5 x 3 mm (1/8") shank-mounted stones, 3 mm (1/8") collet reducer, 6 mm (1/4") inlet adapter and double end spanners.

Die grinder accessories:

- Set of 5 x 6 mm (1/4") and 5 x 3 mm (1/8") replacement shank-mounted stones: Part no. LA429-74

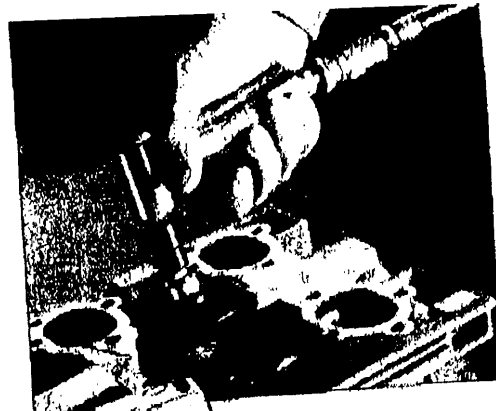

Specifications (at 90 psi - 6.2 bar)

Model	Free speed (rpm)	Rated power		Collet size or spindle size		Net weight		Overall length		Average air cons.		Air inlet in	Min. hose size	
		kW	hp	mm	in	kg	lb	mm	in	l/min	cfm		mm	in
301-EU	20000	0.19	0.25	6	1/4	0.45	1.0	127	5.0	85	3	1/4	10	3/8
302-EU	18000	0.25	0.33	6	1/4	0.45	1.0	140	5.6	85	3	1/4	10	3/8
307A-EU	27000	0.19	0.25	6	1/4	0.30	0.7	121	4.8	85	3	1/4	10	3/8
308-EU	25000	0.25	0.33	6*	1/4*	0.50	1.0	142	5.6	85	3	1/4	10	3/8
344	12000	0.80	1.00	-	3/8-24	1.65	3.6	235	9.3	170	6	1/4	10	3/8
LA419-EU	25000	0.22	0.30	6	1/4	0.55	1.2	121	4.8	85	3	1/4	10	3/8
LA421-EU	12000	0.80	1.00	-	3/8-24	1.80	4.0	229	9.0	170	6	1/4	10	3/8
LA422-EU	12000	0.80	1.00	-	3/8-24	1.85	4.1	229	9.0	170	6	1/4	10	3/8
LA429-EU	22000	0.42	0.56	6	1/4	1.30	2.9	168	6.6	110	4	1/4	10	3/8

* For 3 mm shank diameter accessories, order collet part no. LA429-70 and collet reducer LA429-73.