


4-Way Power Divider

P/N: JXWBGF-T-4-800-1300

Frequency Range(GHz)	0.8-1.3
Insertion Loss(dB)	0.4 max
Isolation(dB)	20 min
VSWR	1.25 max
Phase Balance(°)	3
Amplitude Balance(dB)	0.3
Power Handling(W)	10 CW
Impedance(Ohms)	50
Phase Match(°)	1 at every 50 MHz 3 at all the BW
Amplitude Match(dB)	0.1 every 50 MHz 0.3 at all the BW
Connector	SMA-Female
Net Weight(Kg)	0.11 Around

Outline Drawing (Size: mm)

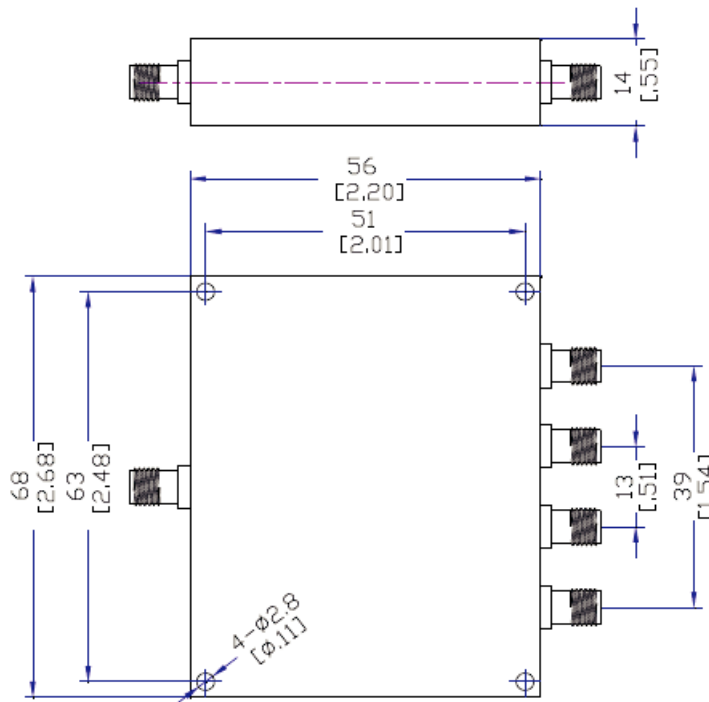

For current data sheets, please contact: sales@aacix.com