


SSB-LX2X20 SERIES 10x20mm FOUR WINDOW (8) CHIP LIGHT BARS

FEATURES			APPLICATIONS			OPTIONS AVAILABLE		
- Chips On Board Style - Reflective Case - Four Colors - HP Light Bar Compatible - Low Cross-Talk Case			- Back Lighting - Graphics Illumination - Ladder Indicators - Logo Illumination			- Bi-Color Circuits - Fixed Voltage Chips - Graphic Overlays		
LUMEX PART NBR	EMITTED COLOR	EPOXY	BRIGHTNESS	VIEW	Vf @ 20mA			
			TYP. (mcd)	ANGLE	TYP. MAX			
SSB-LX2620ID	RED	635	RED DIFF.	25	20	160	2.1	2.8
SSB-LX2620IW	RED	635	WHITE DIFF.	25	20	160	2.1	2.8
SSB-E100SRD	RED	660	RED DIFF.	40	20	160	1.8	2.1
SSB-E100SRW	RED	660	WHITE DIFF.	40	20	160	1.8	2.1
SSB-LX2720YD	YELLOW	585	YELLOW DIFF.	20	20	160	2.1	2.8
SSB-LX2720YW	YELLOW	585	WHITE DIFF.	20	20	160	2.1	2.8
SSB-LX2820SGD	GREEN	565	GREEN DIFF.	30	20	160	2.1	2.8
SSB-LX2820SGW	GREEN	565	WHITE DIFF.	30	20	160	2.1	2.8
SSB-LX2720AD	AMBER	610	AMBER DIFF.	20	20	160	2.1	2.8
SSB-LX2720AW	AMBER	610	WHITE DIFF.	20	20	160	2.1	2.8

H.P. Equivalents With Noryl Low Cross Talk Cases

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm

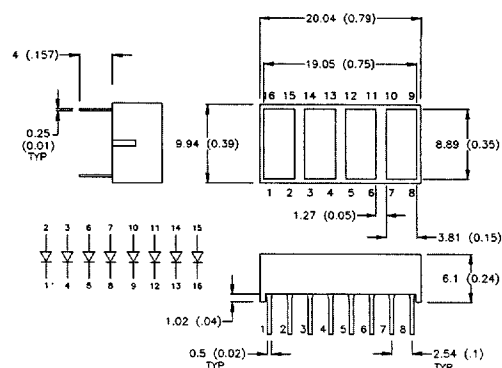


SSA-LXB525XX SERIES 2x5 RECT. LED ARRAY (5) LEDS

FEATURES			APPLICATIONS			MATERIAL SPECIFICATIONS		
- Single Unit Assembly - Easy Installation - Four Color Options			- Level Indicators - Progress Status Indicators - Mix Indicators			- Holder: Black or White Nylon - Terminations: □ .020" Pins - Installation: P.C. or Wire Wrap		
LUMEX PART NBR	EMITTED COLOR	OPERATING	OPERATING	BRIGHTNESS	LED SERIES			
		CURRENT (mA)	TYP Volts (V)	TYP (mcd) @	USED			
SSA-LXB525ID	RED	635	5-25	2.2	7	20	SSL-LX2583XX	
SSA-LXB525SRD	RED	660	5-25	1.7	28	20	SSL-LX2583XX	
SSA-LXB525GD	GREEN	565	5-25	2.2	7	20	SSL-LX2583XX	
SSA-LXB525YD	YELLOW	585	5-25	2.2	7	20	SSL-LX2583XX	

RATINGS ARE PER SINGLE LED UNIT

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm

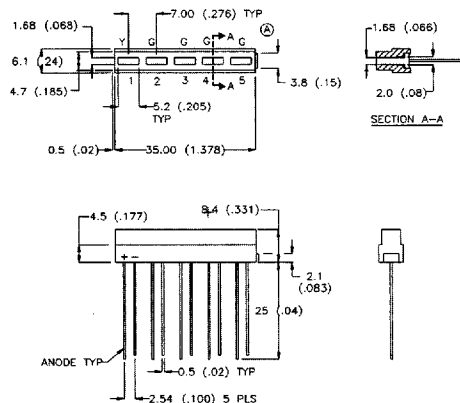

SSA-LXB053XX SERIES 2x5mm LED ARRAY (5) LED

FEATURES			APPLICATIONS			MATERIAL SPECIFICATIONS		
- Single Unit Assembly - Easy Installation - Four Color Options - Mixed Color Units			- Level Indicators - Progress Status Indicators - Mix Indicators			- Holder: Black Nylon - Terminations: □ .020" Pins - Installation: P.C. or Wire Wrap		
LUMEX PART NBR	EMITTED COLOR	OPERATING	OPERATING	BRIGHTNESS	LED SERIES			
		CURRENT (mA)	TYP Volts (V)	TYP (mcd) @	USED			
SSA-LXB053ID	RED	635	5-25	2.2	8	20	SSL-LX2583XX	
SSA-LXB053IRD	RED	660	5-25	1.7	32	20	SSL-LX2583XX	
SSA-LXB053GD	GREEN	565	5-25	2.2	8	20	SSL-LX2583XX	
SSA-LXB053YD	YELLOW	585	5-25	2.2	8	20	SSL-LX2583XX	

RATINGS ARE PER SINGLE LED UNIT

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm

