

LH0003 Wide Bandwidth Operational Amplifier

General Description

The LH0003/LH0003C is a general purpose operational amplifier which features: slewing rate up to $70 \text{ V}/\mu\text{s}$, a gain bandwidth of up to 30 MHz, and high output currents. Other features are:

Features

- Very low offset voltage
- Large output swing



Typically 0.4 mV
 $> \pm 10\text{V}$ into 100Ω load

- High CMRR
- Good large signal frequency response

Typically $> 90 \text{ dB}$
 50 kHz to 400 kHz depending on compensation

The LH0003 is specified for operation over the -55°C to $+125^\circ\text{C}$ military temperature range. The LH0003C is specified for operation over the 0°C to $+85^\circ\text{C}$ temperature range.

Schematic and Connection Diagrams

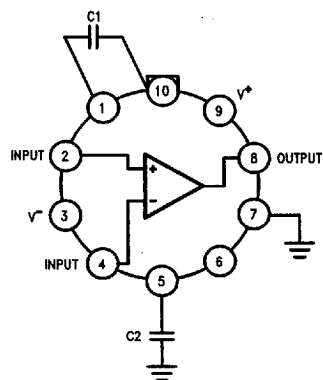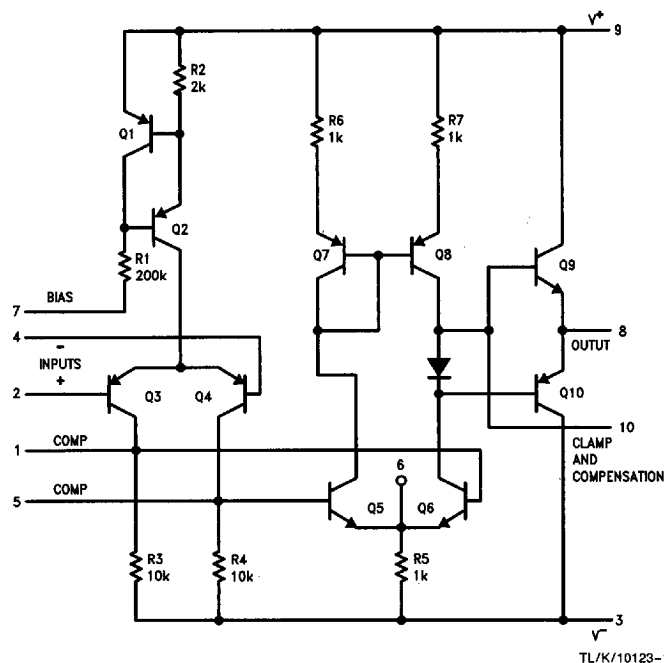

Top View

Order Number LH0003H,
 LH0003H-MIL or LH0003CH
 See NS Package Number H10G

Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage	$\pm 20V$
Power Dissipation	See curve
Differential Input Voltage	$\pm 7V$

Input Voltage	Equal to supply
Load Current	120 mA
Operating Temperature Range LH0003	$-55^{\circ}C$ to $+125^{\circ}C$
LH0003C	$0^{\circ}C$ to $+85^{\circ}C$
Storage Temperature Range	$-65^{\circ}C$ to $+150^{\circ}C$
Lead Temperature (Soldering, 10 sec.)	$300^{\circ}C$

Electrical Characteristics (Notes 1 & 2)




Parameter	Conditions	Min	Typ	Max	Units
Input Offset Voltage	$R_S < 100\Omega$		0.4	3.0	mV
Input Offset Current			0.02	0.2	μA
Input Bias Current			0.4	2.0	μA
Supply Current	$V_S = \pm 20V$		1.2	3	mA
Voltage Gain	$R_L = 100k, V_S = \pm 15V, V_{OUT} = \pm 10V$	20	70		V/mV
Voltage Gain	$R_L = 2k, V_S = \pm 15V, V_{OUT} = \pm 10V$	15	40		V/mV
Output Voltage Swing	$V_S = \pm 15V, R_L = 100\Omega$	± 10	± 12		V
Input Resistance			100		k Ω
Average Temperature Coefficient of Offset Voltage	$R_S < 100\Omega$		4		$\mu V/^{\circ}C$
Average Temperature Coefficient of Bias Current			8		nA/ $^{\circ}C$
CMRR	$R_S < 100\Omega, V_S = \pm 15V, V_{IN} = \pm 10V$	70	90		dB
PSRR	$R_S < 100\Omega, V_S = \pm 15V, \Delta V = 5V$ to $20V$	70	90		dB
Equivalent Input Noise Voltage	$R_S = 100\Omega, f = 10$ kHz to 100 kHz $V_S = \pm 15V$		1.8		μV_{rms}

Note 1: These specifications apply for Pin 7 grounded, for $\pm 5V < V_S < \pm 20V$, with capacitor $C_1 = 90$ pF from pin 1 to pin 10 and $C_2 = 90$ pF from pin 5 to ground, over the specified operating temperature range, unless otherwise specified.

Note 2: Typical values are for $T_{AMBIENT} = 25^{\circ}C$ unless otherwise specified.

Note 3: See #RETS0003X for the LM0003H military specifications.

Typical Performance Characteristics




TL/K/10123-5

Typical Applications

LH0003

High Slew Rate Unity Gain Inverting Amplifier

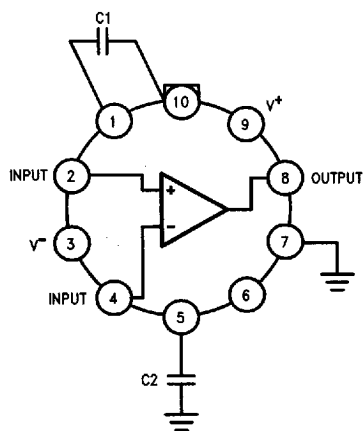


*Previously called NH0003/NH0003C

TL/K/10123-2

Typical Compensation

Circuit Gain	C ₁ pF	C ₂ pF	Slew Rate R _L > 200Ω, V/μs	Full Output Frequency R _L = 200Ω V _{OUT} = ±10V
≥ 40	0	0	70	400
≥ 10	5	30	30	350
≥ 5	15	30	15	250
≥ 2	50	50	5	100
≥ 1	90	90	2	50

Unity Gain Follower

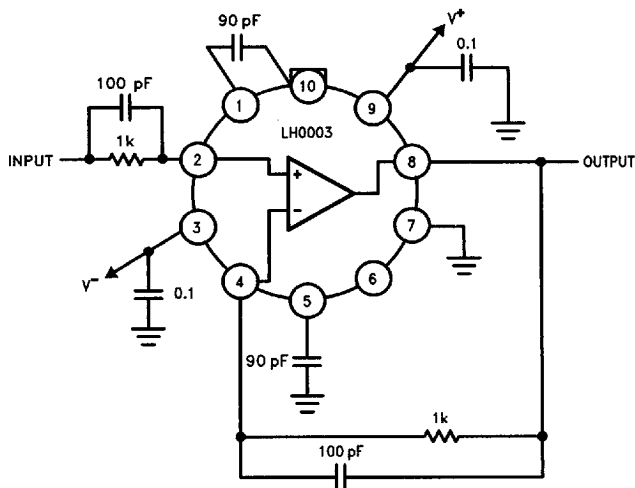

TL/K/10123-4

1