






BOURNS®

Features

- 4.5 mm SMD
- Fast tripping resettable circuit protection
- Surface mount packaging for automated assembly
- Reduced component size and resistance
- Agency recognition:   

Applications

High Density Circuit Board Applications:

- Hard disk drives
- PC motherboards
- PC peripherals
- Point-of-sale (POS) equipment
- PCMCIA cards

MF-MSMD Series - PTC Resettable Fuses

Electrical Characteristics

| Model | V max. Volts | I max. Amps | I _{hold} | I _{trip} | Resistance | | Max. Time To Trip | | Tripped Power Dissipation |
|------------|-----------------|----------------|-------------------|-------------------|-------------------|--------------------|-------------------|------------------|---------------------------|
| | | | Amperes at 23 °C | | Ohms at 23 °C | | Amperes at 23 °C | Seconds at 23 °C | Watts at 23 °C |
| | | | Hold | Trip | R _{Min.} | R _{1Max.} | | | Typ. |
| MF-MSMD010 | 60.0 | 40 | 0.10 | 0.30 | 0.70 | 15.00 | 0.5 | 1.5 | 1.0 |
| MF-MSMD014 | 60.0 | 40 | 0.14 | 0.34 | 0.40 | 6.50 | 1.5 | 0.15 | 1.0 |
| MF-MSMD020 | 30.0 | 80 | 0.20 | 0.40 | 0.40 | 6.00 | 6.0 | 0.06 | 1.0 |
| MF-MSMD030 | 30.0 | 10 | 0.30 | 0.60 | 0.30 | 3.00 | 8.0 | 0.10 | 1.2 |
| MF-MSMD050 | 15.0 | 100 | 0.50 | 1.00 | 0.15 | 1.00 | 8.0 | 0.15 | 1.2 |
| MF-MSMD075 | 13.2 | 100 | 0.75 | 1.50 | 0.11 | 0.45 | 8.0 | 0.20 | 1.2 |
| MF-MSMD110 | 6.0 | 100 | 1.10 | 2.20 | 0.04 | 0.21 | 8.0 | 0.30 | 1.2 |
| MF-MSMD125 | 6.0 | 100 | 1.25 | 2.50 | 0.035 | 0.14 | 8.0 | 0.4 | 1.5 |
| MF-MSMD150 | 6.0 | 100 | 1.50 | 3.00 | 0.03 | 0.120 | 8.0 | 0.5 | 1.5 |
| MF-MSMD160 | 8.0 | 100 | 1.60 | 2.80 | 0.035 | 0.099 | 8.0 | 2.0 | 1.5 |
| MF-MSMD200 | 6.0 | 100 | 2.00 | 4.00 | 0.020 | 0.100 | 8.0 | 3.0 | 1.5 |
| MF-MSMD260 | 6.0 | 100 | 2.60 | 5.20 | 0.015 | 0.080 | 8.0 | 5.0 | 1.5 |

Environmental Characteristics

| | |
|------------------------------------|---|
| Operating/Storage Temperature | -40 °C to +85 °C |
| Maximum Device Surface Temperature | |
| in Tripped State | 125 °C |
| Passive Aging | +85 °C, 1000 hours ±5 % typical resistance change |
| Humidity Aging | +85 °C, 85 % R.H. 1000 hours ±5 % typical resistance change |
| Thermal Shock | +85 °C to -40 °C, 20 times ±10 % typical resistance change |
| Solvent Resistance | MIL-STD-202, Method 215 No change |
| Vibration | MIL-STD-883C, Method 2007.1, Condition A No change |

Test Procedures And Requirements For Model MF-MSMD Series

| Test | Test Conditions | Accept/Reject Criteria |
|------------------------|---|--|
| Visual/Mech. | Verify dimensions and materials | Per MF physical description |
| Resistance | In still air @ 23 °C | R _{min} ≤ R ≤ R _{1max} |
| Time to Trip | At specified current, V _{max} , 23 °C | T ≤ max. time to trip (seconds) |
| Hold Current | 30 min. at I _{hold} | No trip |
| Trip Cycle Life | V _{max} , I _{max} , 100 cycles | No arcing or burning |
| Trip Endurance | V _{max} , 48 hours | No arcing or burning |
| Solderability | MIL-STD-202F, Method 208F | 95 % min. coverage |
| UL File Number | E174545 http://www.ul.com/ Follow link to Certifications, then UL File No., enter E174545 | |
| CSA File Number | CA110338 http://directories.csa-international.org/ Under "Certification Record" and "File Number" enter 110338-0-000 | |
| TÜV Certificate Number | R 02057213 http://www.tuvdotcom.com/ Follow link to "other certificates", enter File No. 2057213 | |

Additional Features

- Patents pending

MF-MSMD Series - PTC Resettable Fuses

BOURNS®


Product Dimensions

| Model | A | | B | | C | | D |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. |
| MF-MSMD010 | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.56}{(0.022)}$ | $\frac{0.81}{(0.032)}$ | $\frac{0.30}{(0.012)}$ |
| MF-MSMD014 | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.56}{(0.022)}$ | $\frac{0.81}{(0.032)}$ | $\frac{0.30}{(0.012)}$ |
| MF-MSMD020 | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.56}{(0.022)}$ | $\frac{0.81}{(0.032)}$ | $\frac{0.30}{(0.012)}$ |
| MF-MSMD030 | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.56}{(0.022)}$ | $\frac{0.81}{(0.032)}$ | $\frac{0.30}{(0.012)}$ |
| MF-MSMD050 | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.38}{(0.015)}$ | $\frac{0.62}{(0.024)}$ | $\frac{0.30}{(0.012)}$ |
| MF-MSMD075 | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.38}{(0.015)}$ | $\frac{0.62}{(0.024)}$ | $\frac{0.30}{(0.012)}$ |
| MF-MSMD110 | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.38}{(0.015)}$ | $\frac{0.62}{(0.024)}$ | $\frac{0.30}{(0.012)}$ |
| MF-MSMD125 | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.30}{(0.012)}$ | $\frac{0.48}{(0.019)}$ | $\frac{0.30}{(0.012)}$ |
| MF-MSMD150 | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.30}{(0.012)}$ | $\frac{0.48}{(0.019)}$ | $\frac{0.30}{(0.012)}$ |
| MF-MSMD160 | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.30}{(0.012)}$ | $\frac{0.48}{(0.019)}$ | $\frac{0.30}{(0.012)}$ |
| MF-MSMD200 | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.30}{(0.012)}$ | $\frac{0.48}{(0.019)}$ | $\frac{0.30}{(0.012)}$ |
| MF-MSMD260 | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.25}{(0.010)}$ | $\frac{0.48}{(0.019)}$ | $\frac{0.30}{(0.012)}$ |


Packaging: 2000 pcs. per reel.

UNIT = $\frac{\text{MM}}{\text{(INCHES)}}$

Top and Bottom View Side View

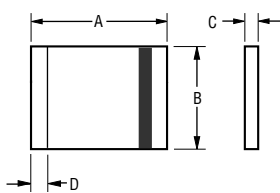


Recommended Pad Layout

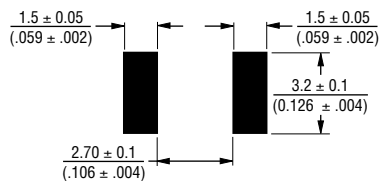

Terminal material: solder-plated copper
Termination pad solderability: Meets EIA Specification RS-186-9E, ANSI/J-STD-002 Category 3.

Solder Reflow Recommendations

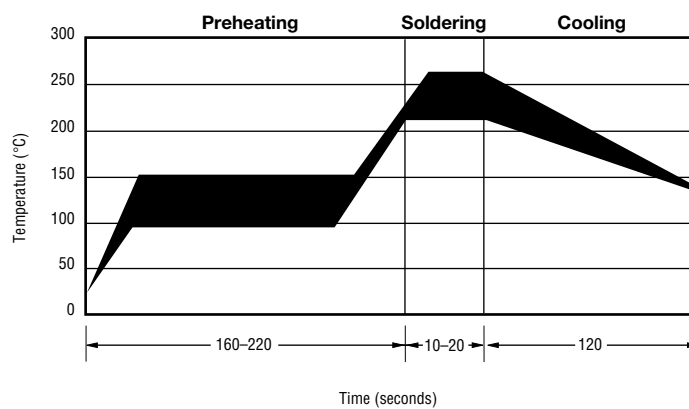

Note:


- MF-MSMD models can be wave soldered and reworked.
- If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

MF-MSMD Series - PTC Resettable Fuses

BOURNS®

Typical Time to Trip at 23 °C

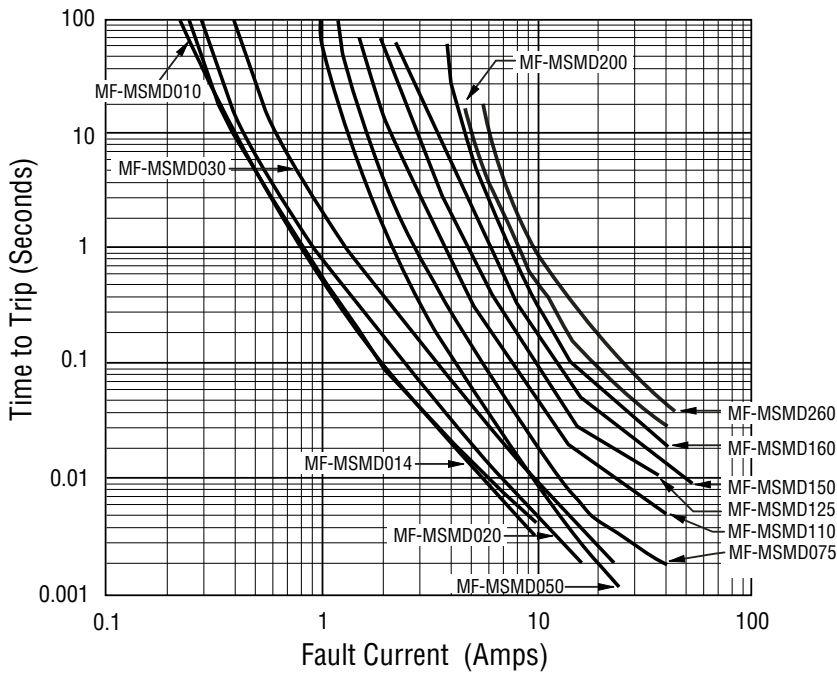

How to Order

MF - MSMD 075 - 2

Multifuse® Product Designator _____


Series _____
 MSMD = 4.5 mm Surface Mount Component

Hold Current, I_{hold} _____
 010-260 (0.10 Amps - 2.60 Amps)

Packaging _____
 Packaged per EIA 481-1
 -2 = Tape and Reel

Typical Part Marking

Represents total content. Layout may vary.

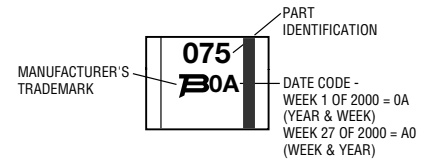


Thermal Derating Chart - I_{hold} / I_{trip} (Amps)

| Model | Ambient Operating Temperature | | | | | | | | |
|------------|-------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | -40 °C | -20 °C | 0 °C | 23 °C | 40 °C | 50 °C | 60 °C | 70 °C | 85 °C |
| MF-MSMD010 | 0.16 / 0.32 | 0.14 / 0.28 | 0.12 / 0.24 | 0.11 / 0.22 | 0.08 / 0.16 | 0.07 / 0.14 | 0.06 / 0.12 | 0.05 / 0.10 | 0.03 / 0.06 |
| MF-MSMD014 | 0.23 / 0.52 | 0.19 / 0.45 | 0.17 / 0.40 | 0.14 / 0.34 | 0.12 / 0.29 | 0.10 / 0.25 | 0.09 / 0.23 | 0.08 / 0.21 | 0.06 / 0.16 |
| MF-MSMD020 | 0.29 / 0.58 | 0.26 / 0.52 | 0.23 / 0.46 | 0.20 / 0.40 | 0.17 / 0.34 | 0.15 / 0.30 | 0.14 / 0.28 | 0.12 / 0.24 | 0.10 / 0.20 |
| MF-MSMD030 | 0.44 / 0.88 | 0.39 / 0.78 | 0.35 / 0.70 | 0.30 / 0.60 | 0.26 / 0.52 | 0.23 / 0.46 | 0.21 / 0.42 | 0.18 / 0.36 | 0.15 / 0.30 |
| MF-MSMD050 | 0.77 / 1.54 | 0.68 / 1.36 | 0.59 / 1.18 | 0.50 / 1.00 | 0.44 / 0.88 | 0.40 / 0.80 | 0.37 / 0.74 | 0.33 / 0.66 | 0.29 / 0.58 |
| MF-MSMD075 | 1.15 / 2.30 | 1.01 / 2.02 | 0.88 / 1.76 | 0.75 / 1.50 | 0.65 / 1.30 | 0.60 / 1.20 | 0.55 / 1.10 | 0.49 / 0.98 | 0.43 / 0.86 |
| MF-MSMD110 | 1.59 / 3.18 | 1.43 / 2.86 | 1.26 / 2.52 | 1.10 / 2.20 | 0.95 / 1.90 | 0.87 / 1.74 | 0.80 / 1.60 | 0.71 / 1.42 | 0.60 / 1.20 |
| MF-MSMD125 | 1.80 / 3.61 | 1.63 / 3.25 | 1.43 / 2.86 | 1.25 / 2.50 | 1.08 / 2.16 | 0.99 / 1.98 | 0.91 / 1.82 | 0.81 / 1.62 | 0.68 / 1.36 |
| MF-MSMD150 | 2.17 / 4.34 | 1.95 / 3.90 | 1.72 / 3.44 | 1.50 / 3.00 | 1.30 / 2.59 | 1.18 / 2.37 | 1.09 / 2.18 | 0.97 / 1.94 | 0.82 / 1.64 |
| MF-MSMD160 | 2.30 / 5.00 | 2.20 / 4.40 | 1.90 / 3.80 | 1.60 / 2.80 | 1.45 / 2.90 | 1.30 / 2.60 | 1.15 / 2.30 | 1.03 / 2.06 | 0.91 / 1.82 |
| MF-MSMD200 | 3.08 / 6.14 | 2.71 / 5.39 | 2.35 / 4.62 | 2.00 / 4.01 | 1.80 / 1.61 | 1.60 / 3.19 | 1.50 / 2.98 | 1.07 / 2.12 | 0.80 / 1.58 |
| MF-MSMD260 | 4.00 / 7.98 | 3.52 / 7.01 | 3.06 / 6.09 | 2.60 / 5.15 | 2.34 / 4.64 | 2.08 / 4.13 | 1.95 / 3.87 | 1.39 / 2.74 | 1.04 / 2.05 |

MF-MSMD, MF-USMD & MF-ESMD Series Tape and Reel Specs



| Tape Dimensions | MF-MSMD Series per EIA-481-1 | MF-USMD Series per EIA 481-1 | MF-ESMD Series per EIA 481-2 |
|------------------------|--|--|--|
| W | $\frac{12.0 \pm 0.30}{(0.472 \pm 0.012)}$ | $\frac{8.0 \pm 0.30}{(0.315 \pm 0.012)}$ | $\frac{24.0 \pm 0.3}{(0.945 \pm 0.012)}$ |
| P ₀ | $\frac{4.0 \pm 0.10}{(0.157 \pm 0.004)}$ | $\frac{4.0 \pm 0.10}{(0.157 \pm 0.004)}$ | $\frac{4.0 \pm 0.1}{(0.157 \pm 0.004)}$ |
| P ₁ | $\frac{8.0 \pm 0.10}{(0.315 \pm 0.004)}$ | $\frac{4.0 \pm 0.10}{(0.157 \pm 0.004)}$ | $\frac{8.0 \pm 0.1}{(0.315 \pm 0.004)}$ |
| P ₂ | $\frac{2.0 \pm 0.05}{(0.079 \pm 0.002)}$ | $\frac{2.0 \pm 0.05}{(0.079 \pm 0.002)}$ | $\frac{2.0 \pm 0.1}{(0.079 \pm 0.004)}$ |
| A ₀ | $\frac{3.66 \pm 0.15}{(0.144 \pm 0.006)}$ | MF-USMD005,010,020: $\frac{2.76 \pm 0.10}{(0.109 \pm 0.004)}$ | MF-USMD035,050,075,110: $\frac{2.93 \pm 0.15}{(0.115 \pm 0.006)}$ |
| B ₀ | $\frac{4.98 \pm 0.10}{(0.196 \pm 0.004)}$ | MF-USMD005,010,020: $\frac{3.5 \pm 0.1}{(0.138 \pm 0.004)}$ | MF-USMD035,050,075,110: $\frac{3.56 \pm 0.1}{(0.140 \pm 0.004)}$ |
| B ₁ max. | $\frac{5.9}{(0.232)}$ | $\frac{4.35}{(0.171)}$ | $\frac{20.1}{(0.791)}$ |
| D ₀ | $\frac{1.5 + 0.10/-0.00}{(0.059 + 0.004/-0)}$ | $\frac{1.50 + 0.1/-0.0}{(0.059 + 0.004/-0)}$ | $\frac{1.5 + 0.1/-0.0}{(0.059 + 0.004/-0)}$ |
| F | $\frac{5.5 \pm 0.05}{(0.217 \pm 0.002)}$ | $\frac{3.5 \pm 0.05}{(0.138 \pm 0.002)}$ | $\frac{11.5 \pm 0.10}{(0.453 \pm 0.004)}$ |
| E ₁ | $\frac{1.75 \pm 0.10}{(0.069 \pm 0.004)}$ | $\frac{1.75 \pm 0.10}{(0.069 \pm 0.004)}$ | $\frac{1.75 \pm 0.10}{(0.069 \pm 0.004)}$ |
| E ₂ min. | $\frac{10.25}{(0.404)}$ | $\frac{6.25}{(0.246)}$ | $\frac{22.25}{(0.876)}$ |
| T max. | $\frac{0.6}{(0.024)}$ | $\frac{0.6}{(0.024)}$ | $\frac{0.6}{(0.024)}$ |
| T ₁ max. | $\frac{0.1}{(0.004)}$ | $\frac{0.1}{(0.004)}$ | $\frac{0.1}{(0.004)}$ |
| K ₀ | $\frac{0.95 \pm 0.10}{(0.037 \pm 0.004)}$ | MF-USMD005,010,020: $\frac{1.07 \pm 0.10}{(0.042 \pm 0.004)}$ | MF-USMD035,050,075,110: $\frac{0.75 \pm 0.10}{(0.030 \pm 0.004)}$ |
| Leader min. | $\frac{390}{(15.35)}$ | $\frac{390}{(15.35)}$ | $\frac{390}{(15.35)}$ |
| Trailer min. | $\frac{160}{(6.30)}$ | $\frac{160}{(6.30)}$ | $\frac{160}{(6.30)}$ |
| Reel Dimensions | | | |
| A max. | $\frac{185}{(7.28)}$ | $\frac{185}{(7.28)}$ | $\frac{360}{(14.17)}$ |
| N min. | $\frac{50}{(1.97)}$ | $\frac{50}{(1.97)}$ | $\frac{60}{(2.36)}$ |
| W ₁ | $\frac{12.4 + 2.0/-0.0}{(0.488 + 0.079/-0.0)}$ | $\frac{8.4 + 1.5/-0.0}{(0.331 + 0.059/-0)}$ | $\frac{24.4 + 2.0/-0.0}{(0.961 + 0.079/-0)}$ |
| W ₂ max. | $\frac{18.4}{(0.724)}$ | $\frac{14.4}{(0.567)}$ | $\frac{30.4}{(1.20)}$ |

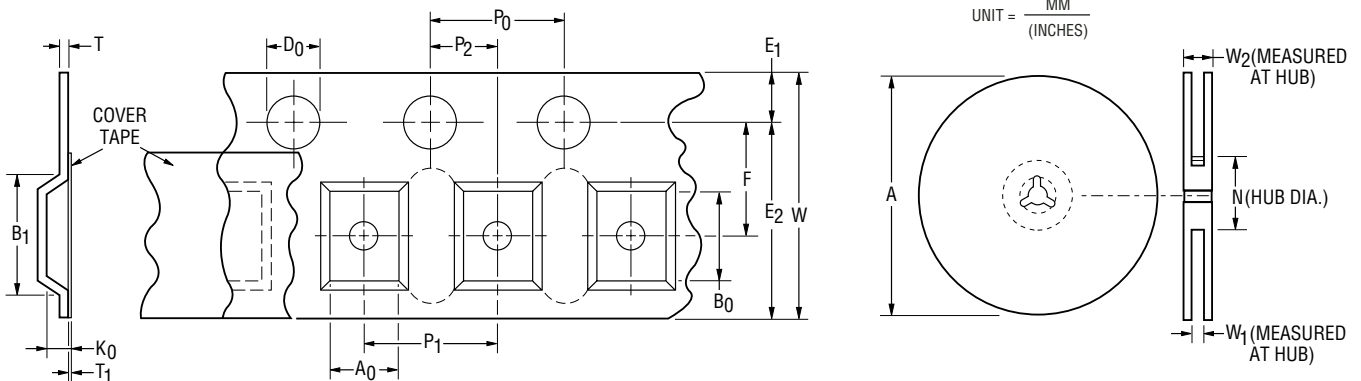

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.