



7078950 → 7078985

SCAFFOLDING & CONNECTORS

Section 7

9050



2000

SCAFFOLD RODS

Manufactured in aluminium alloy 13 mm diameter with both ends domed. The rods are available in the following standard sizes.

2000/1
2000/2
2000/3
2000/4

1800 mm
1500 mm
1200 mm
900 mm


7078950 2000/5
2000/6
7078961 2000/7
7078973 2000/8

600 mm
450 mm
300 mm
150 mm

7078985

Other sizes can be manufactured in aluminium, stainless or zinc plated steel

2209

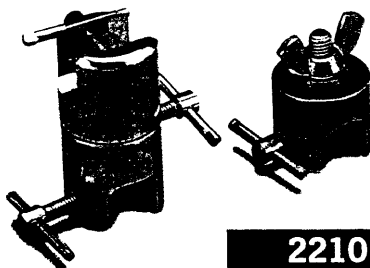

2121/1
2121/2

1000 mm
2000 mm

Other sizes on request

9050

HOOK CONNECTOR

Manufactured in nickel plated brass and actuated by a thumbscrew. Accepts rods up to 13 mm diameter.


2210

2209

UNIVERSAL SCAFFOLD BOSSHEAD

Nickel plated brass. The bosshead is in 2 halves which enables it to be rotated and clamped at any angle. The bosshead accepts scaffold rods and all securing screws are sliding tommy bar pattern.

2308

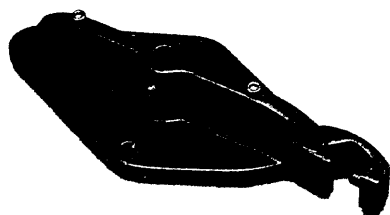

2210

ADAPTOR

Nickel plated brass. The adaptor is slotted at one end to accept scaffold rods and has screw, washer and wing nut at the other end to fit to a steel slotted angle.

2308

UNIVERSAL SCAFFOLD FOOT

Manufactured in alloy and painted blue acrylic. The foot may be screwed down or fitted with four rubber feet. In this position it will support 2 vertical and 2 horizontal rods 100 mm apart. The central hole is tapped M10 at the lower end to accept standard retort rods. An alternative use of the foot is a permanent anchor for scaffolding by securing to the underside of a reagent shelf with the boss projecting to accept a vertical rod. In this position and using 2 feet a horizontal rod may be fitted clear of the shelf to carry burette holders.