

Specifications

Insulation Resistance:	1000M Ω min.
Withstanding Voltage:	750V AC
Current Rating:	1A max. per contact
Voltage Rating:	30V AC (rms) max.
Contact Resistance:	15m Ω max. (initial)


Part Number

USB-B-P01

Note:
USB-B-P01 is only available in assembled versions with moulded strain relief.
For more details please contact Yamaichi.

Materials and Finish

Housing:	Thermoplastic, glass filled (UL94V-0)
Shell:	Steel, Tin over Nickel
Contacts:	Copper Alloy
Contact Plating:	Gold over Nickel

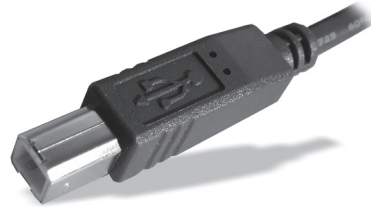

Outline Plug Dimensions

