
HM514800CI Series HM51S4800CI Series

524,288-word $\times$ 8-bit Dynamic Random Access Memory

HITACHI

ADE-203-619A (Z)

Rev. 1.0

Jul. 18, 1996

Description

The Hitachi HM51(S)4800CI Series are CMOS dynamic RAM organized as 524,288-word $\times$ 8-bit. HM51(S)4800CI have realized higher density, higher performance and various functions by employing 0.8 μ m CMOS process technology and some new CMOS circuit design technologies. The HM51(S)4800CI Series offer Fast Page Mode as a high speed access mode. Multiplexed address input permits the HM51(S)4800CI Series to be packaged in standard 400-mil 28-pin plastic SOJ. Internal refresh timer enables HM51S4800CI Series self refresh operation.

Features

- Single 5 V ($\pm 10\%$)
- High speed
 - Access time: 70 ns/80 ns (max)
- Low power dissipation
 - Active mode: 550 mW/495 mW (max)
 - Standby mode: 11 mW (max)
1.1 mW (max) (L-version)
- Fast page mode capability
- 1,024 refresh cycles: 16 ms
128 ms (L-version)
- 2 variations of refresh
 - $\overline{\text{RAS}}$ -only refresh
 - $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh
- Battery backup operation (L-version)
- Self refresh operation (HM51S4800CI)
- Operating temperature range
 - -40 to $+85^\circ\text{C}$



■ 4496203 0026960 444 ■

HM514800CI Series, HM51S4800CI Series


Ordering Information

Type No.	Access Time	Package
HM514800CJI-7 HM514800CJI-8	70 ns 80 ns	400-mil 28-pin plastic SOJ (CP-28D)
HM514800CLJI-7 HM514800CLJI-8	70 ns 80 ns	
HM51S4800CJI-7 HM51S4800CJI-8	70 ns 80 ns	
HM51S4800CLJI-7 HM51S4800CLJI-8	70 ns 80 ns	

HITACHI

HM514800CI Series, HM51S4800CI Series

Pin Arrangement

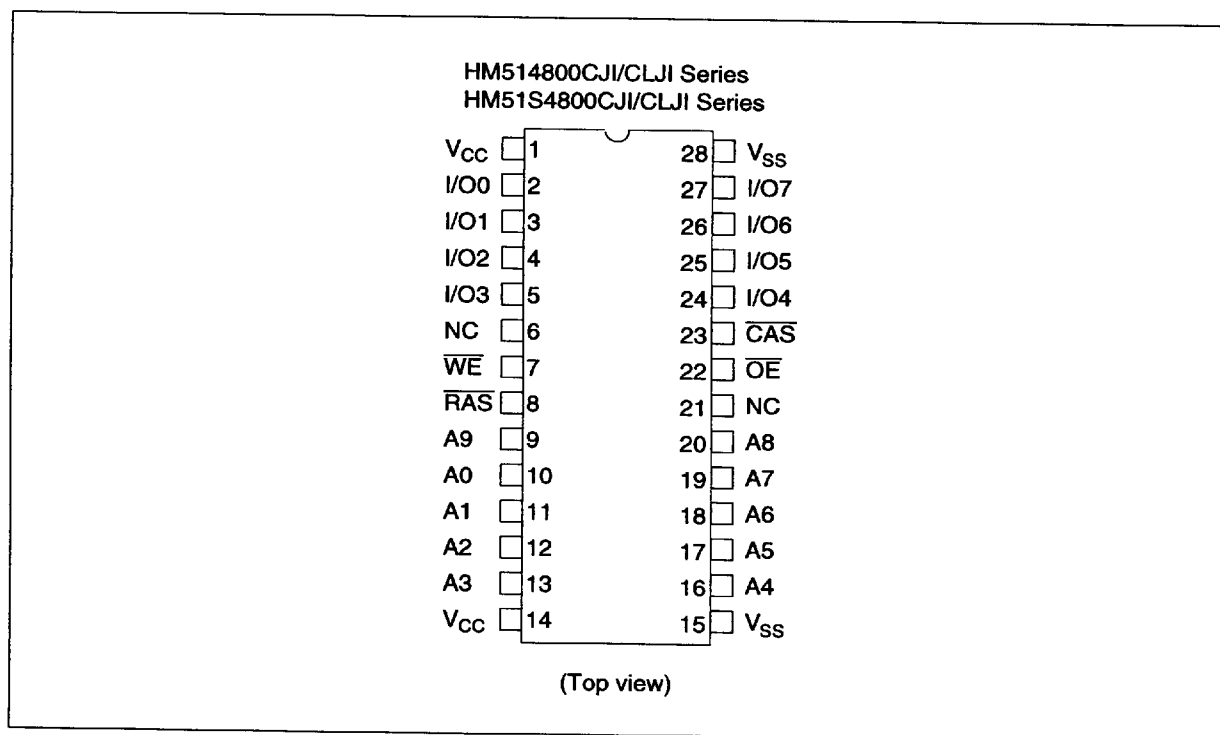


Pin Description

Pin Name	Function	
A0 to A9	Address input – Row address – Column address – Refresh address	A0 – A9 A0 – A8 A0 – A9
I/O0 to I/O7	Data-in/data-out	
$\overline{\text{RAS}}$	Row address strobe	
$\overline{\text{CAS}}$	Column address strobe	
$\overline{\text{WE}}$	Read/write enable	
$\overline{\text{OE}}$	Output enable	
V_{CC}	Power supply	
V_{SS}	Ground	
NC	No connection	

HITACHI

HM514800CI Series, HM51S4800CI Series

Block Diagram

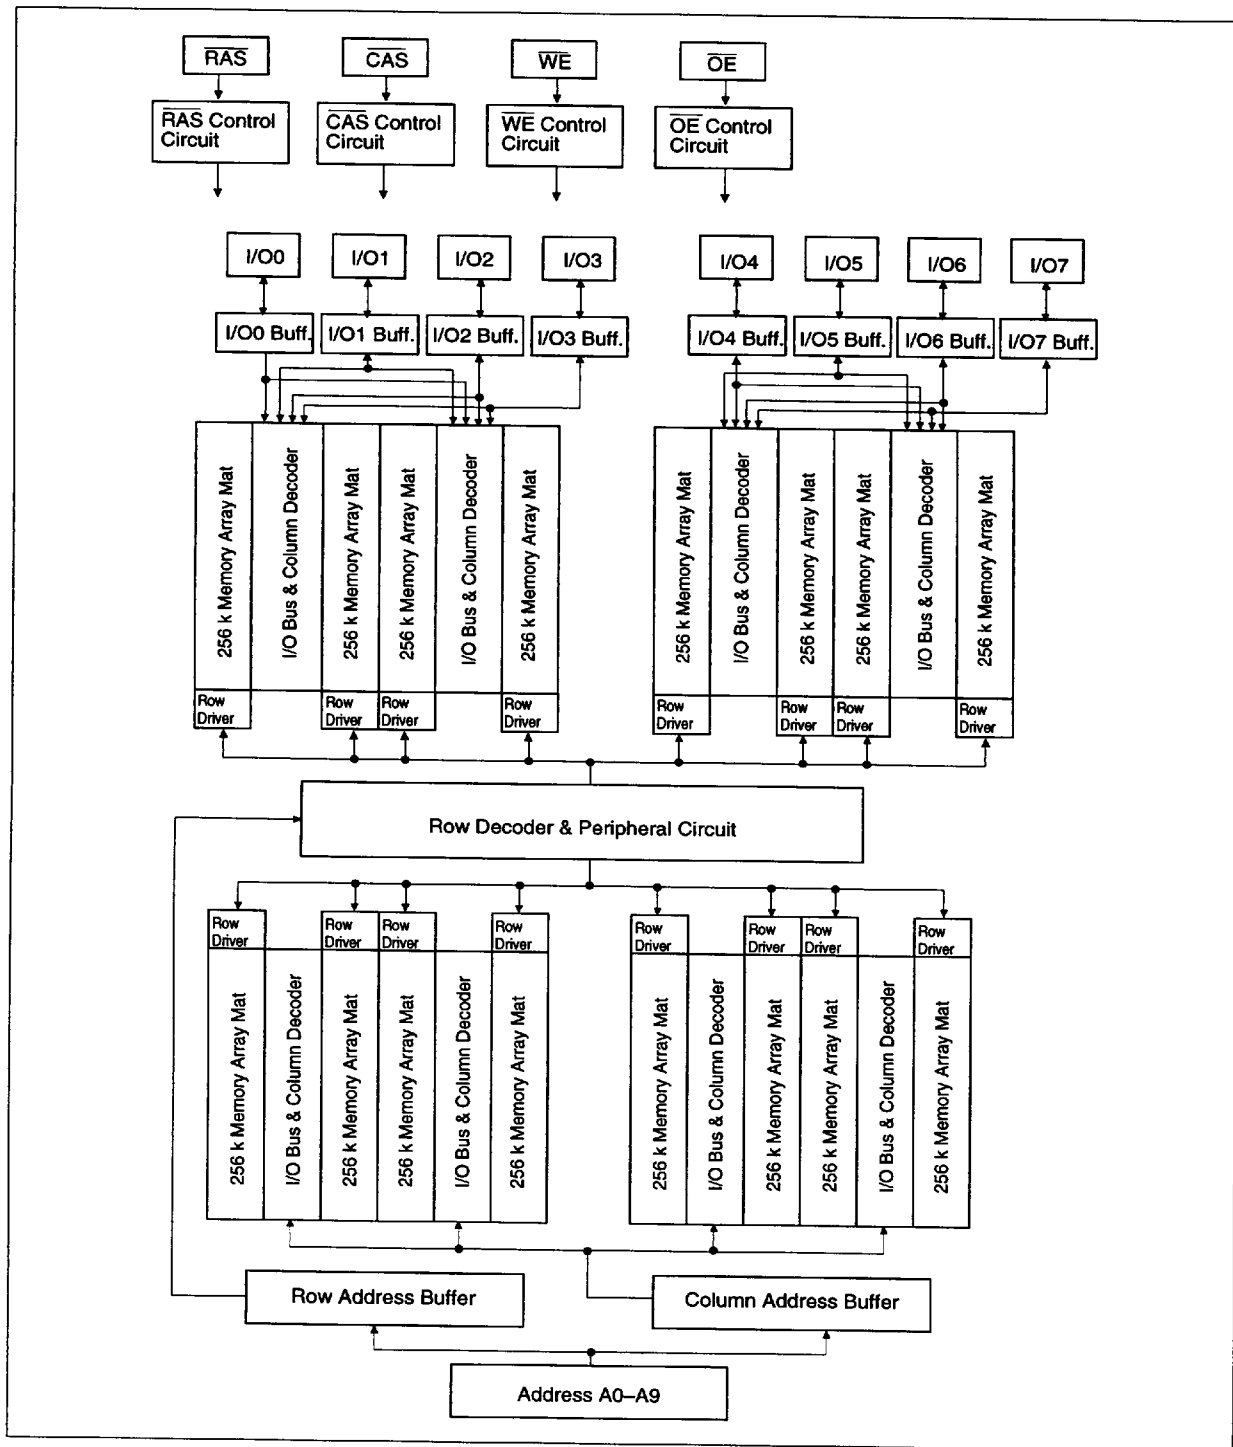

HITACHI

HM514800CI Series, HM51S4800CI Series

Operation Mode

The HM51(S)4800CI series has the following 11 operation modes.

1. Read cycle
2. Early write cycle
3. Delayed write cycle
4. Read-modify-write cycle
5. $\overline{\text{RAS}}$ -only refresh cycle
6. $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh cycle
7. Self refresh cycle (HM51S4800CI)
8. Fast page mode read cycle
9. Fast page mode early write cycle
10. Fast page mode delayed write cycle
11. Fast page mode read-modify-write cycle

Inputs

RAS	CAS	WE	OE	Output	Operation
H	H	D	D	Open	Standby
H	L	H	L	Valid	Standby
L	L	H	L	Valid	Read cycle
L	L	L ²	D	Open	Early write cycle
L	L	L ²	H	Undefined	Delayed write cycle
L	L	H to L	L to H	Valid	Read-modify-write cycle
L	H	D	D	Open	$\overline{\text{RAS}}$ -only refresh cycle
H to L	L	D	D	Open	$\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh cycle Self refresh cycle (HM51S4800CI)
L	H to L	H	L	Valid	Fast page mode read cycle
L	H to L	L ²	D	Open	Fast page mode early write cycle
L	H to L	L ²	H	Undefined	Fast page mode delayed write cycle
L	H to L	H to L	L to H	Valid	Fast page mode read-modify-write cycle
L	L	H	H	Open	Read cycle (Output disabled)

Notes: 1. H: High (inactive) L: Low (active) D: H or L

2. $t_{\text{WCS}} \geq 0 \text{ ns}$ Early write cycle

$t_{\text{WCS}} < 0 \text{ ns}$ Delayed write cycle

HITACHI

HM514800CI Series, HM51S4800CI Series

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Voltage on any pin relative to V_{SS}	V_T	-1.0 to +7.0	V
Supply voltage relative to V_{SS}	V_{CC}	-1.0 to +7.0	V
Short circuit output current	I_{out}	50	mA
Power dissipation	P_T	1.0	W
Operating temperature	T_{opr}	-40 to +85	°C
Storage temperature	T_{stg}	-55 to +125	°C

Recommended DC Operating Conditions ($T_a = -40$ to $+85^\circ\text{C}$)

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Supply voltage	V_{SS}	0	0	0	V	2
	V_{CC}	4.5	5.0	5.5	V	1, 2
Input high voltage	V_{IH}	2.4	—	6.5	V	1
Input low voltage	V_{IL}	-1.0	—	0.8	V	1

Notes: 1. All voltage referred to V_{SS} .

2. The supply voltage with all V_{CC} pins must be on the same level.

The supply voltage with all V_{SS} pins must be on the same level.

DC Characteristics ($T_a = -40$ to $+85^\circ\text{C}$, $V_{CC} = 5\text{ V} \pm 10\%$, $V_{SS} = 0\text{ V}$) ^{*5}

		HM514800CI, HM51S4800CI					
		-7		-8			
Parameter	Symbol	Min	Max	Min	Max	Unit	Test Conditions
Operating current ^{1,2}	I _{CC1}	—	110	—	100	mA	RAS, CAS cycling t _{RC} = min
Standby current	I _{CC2}	—	2	—	2	mA	TTL interface RAS, CAS = V _{IH} Dout = High-Z
		—	1	—	1	mA	CMOS interface RAS, CAS ≥ V _{CC} - 0.2 V Dout = High-Z
Standby current (L-version)	I _{CC2}	—	200	—	200	μA	CMOS interface RAS, CAS ≥ V _{CC} - 0.2 V Dout = High-Z
RAS-only refresh current ²	I _{CC3}	—	110	—	100	mA	t _{RC} = min

HITACHI

HM514800CI Series, HM51S4800CI Series

DC Characteristics ($T_a = -40$ to $+85^\circ\text{C}$, $V_{CC} = 5\text{ V} \pm 10\%$, $V_{SS} = 0\text{ V}$) *5 (cont)

		HM514800CI, HM51S4800CI					
		-7		-8			
Parameter	Symbol	Min	Max	Min	Max	Unit	Test Conditions
Standby current ¹	I _{CC5}	—	5	—	5	mA	$\overline{\text{RAS}} = V_{IH}$, $\overline{\text{CAS}} = V_{IL}$ Dout = enable
$\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh current ⁴	I _{CC6}	—	110	—	100	mA	t _{RC} = min
Fast page mode current ^{1,3}	I _{CC7}	—	110	—	100	mA	t _{PC} = min
Battery backup current ⁴ (Standby with CBR refresh) (L-version)	I _{CC10}	—	300	—	300	μA	Standby: CMOS interface Dout = High-Z CBR refresh: t _{RC} = 125 μs t _{RAS} ≤ 1 μs, $\overline{\text{CAS}} = V_{IL}$ $\overline{\text{WE}} = V_{IH}$
Self refresh mode current (HM51S4800C)	I _{CC11}	—	1	—	1	mA	CMOS interface $\overline{\text{RAS}}, \overline{\text{CAS}} \leq 0.2\text{ V}$ Dout = High-Z
Self refresh mode current (HM51S4800CL)	I _{CC11}	—	200	—	200	μA	CMOS interface $\overline{\text{RAS}}, \overline{\text{CAS}} \leq 0.2\text{ V}$ Dout = High-Z
Input leakage current	I _{LI}	-10	10	-10	10	μA	0 V ≤ Vin ≤ 6.5 V
Output leakage current	I _{LO}	-10	10	-10	10	μA	0 V ≤ Vout ≤ 6.5 V Dout = disable
Output high voltage	V _{OH}	2.4	V _{CC}	2.4	V _{CC}	V	High Iout = -5 mA
Output low voltage	V _{OL}	0	0.4	0	0.4	V	Low Iout = 4.2 mA

Notes: 1. I_{CC} depends on output load condition when the device is selected I_{CC} max is specified at the output open condition.

2. Address can be changed once or less while $\overline{\text{RAS}} = V_{IL}$.

3. Address can be changed once or less within one page cycle.

4. $V_{IH} \geq V_{CC} - 0.2\text{ V}$, $V_{IL} \leq 0.2\text{ V}$; Address can be changed once or less while $\overline{\text{CAS}} = V_{IL}$.

5. The supply voltage with all V_{CC} pins must be on the same level.

The supply voltage with all V_{SS} pins must be on the same level.

Capacitance ($T_a = 25^\circ\text{C}$, $V_{CC} = 5\text{ V} \pm 10\%$)

Parameter	Symbol	Typ	Max	Unit	Notes
Input capacitance (Address)	C_{I1}	—	5	pF	1
Input capacitance (Clocks)	C_{I2}	—	7	pF	1
Output capacitance (Data-in, Data-out)	$C_{I/O}$	—	10	pF	1, 2

Notes: 1. Capacitance measured with Boonton Meter or effective capacitance measuring method.

2. $\overline{\text{CAS}} = V_{IH}$ to disable Dout.

HITACHI

HM514800CI Series, HM51S4800CI Series

AC Characteristics ($T_a = -40$ to $+85^\circ\text{C}$, $V_{CC} = 5\text{ V} \pm 10\%$, $V_{SS} = 0\text{ V}$) *1, *14, *15

Test conditions

- Input rise and fall time: 5 ns
- Input levels: 0 V, 3 V
- Input timing reference levels: 0.8 V, 2.4 V
- Output load: 2 TTL gate + C_L (100 pF) (Including scope and jig)

Read, Write, Read-Modify-Write and Refresh Cycles (Common Parameters)

Parameter	Symbol	HM514800CI, HM51S4800CI				Unit	Notes
		-7	Max	-8	Max		
Random read or write cycle time	t_{RC}	130	—	150	—	ns	
RAS precharge time	t_{RP}	50	—	60	—	ns	
RAS pulse width	t_{RAS}	70	10000	80	10000	ns	
CAS pulse width	t_{CAS}	20	10000	20	10000	ns	
Row address setup time	t_{ASR}	0	—	0	—	ns	
Row address hold time	t_{RAH}	10	—	10	—	ns	
Column address setup time	t_{ASC}	0	—	0	—	ns	
Column address hold time	t_{CAH}	15	—	15	—	ns	
RAS to CAS delay time	t_{RCD}	20	50	20	60	ns	8
RAS to column address delay time	t_{RAD}	15	35	15	40	ns	9
RAS hold time	t_{RSH}	20	—	20	—	ns	
CAS hold time	t_{CSH}	70	—	80	—	ns	
CAS to RAS precharge time	t_{CRP}	10	—	10	—	ns	
$\overline{OE}$ to Din delay time	t_{ODD}	20	—	20	—	ns	
$\overline{OE}$ delay time from Din	t_{DZO}	0	—	0	—	ns	
CAS setup time from Din	t_{DZC}	0	—	0	—	ns	
Transition time (rise and fall)	t_T	3	50	3	50	ns	7
Refresh period	t_{REF}	—	16	—	16	ms	
Refresh period (L-version)	t_{REF}	—	128	—	128	ms	

HITACHI

HM514800CI Series, HM51S4800CI Series

Read Cycle

HM514800CI, HM51S4800CI							
Parameter	Symbol	-7		-8		Unit	Notes
		Min	Max	Min	Max		
Access time from $\overline{\text{RAS}}$	t_{RAC}	—	70	—	80	ns	2, 3
Access time from $\overline{\text{CAS}}$	t_{CAC}	—	20	—	20	ns	3, 4, 13
Access time from address	t_{AA}	—	35	—	40	ns	3, 5, 13
Access time from $\overline{\text{OE}}$	t_{OAC}	—	20	—	20	ns	
Read command setup time	t_{RCS}	0	—	0	—	ns	
Read command hold time to $\overline{\text{CAS}}$	t_{RCH}	0	—	0	—	ns	16
Read command hold time to $\overline{\text{RAS}}$	t_{RRH}	0	—	0	—	ns	16
Column address to $\overline{\text{RAS}}$ lead time	t_{RAL}	35	—	40	—	ns	
Output buffer turn-off time	t_{OFF1}	0	15	0	15	ns	6
Output buffer turn-off to $\overline{\text{OE}}$	t_{OFF2}	0	15	0	15	ns	6
$\overline{\text{CAS}}$ to Din delay time	t_{CDD}	15	—	15	—	ns	

Write Cycle

HM514800CI, HM51S4800CI							
Parameter	Symbol	-7		-8		Unit	Notes
		Min	Max	Min	Max		
Write command setup time	t_{WCS}	0	—	0	—	ns	10
Write command hold time	t_{WCH}	15	—	15	—	ns	
Write command pulse width	t_{WP}	10	—	10	—	ns	
Write command to $\overline{\text{RAS}}$ lead time	t_{RWL}	20	—	20	—	ns	
Write command to $\overline{\text{CAS}}$ lead time	t_{CWL}	20	—	20	—	ns	
Data-in setup time	t_{DS}	0	—	0	—	ns	11
Data-in hold time	t_{DH}	15	—	15	—	ns	11
$\overline{\text{CAS}}$ to $\overline{\text{OE}}$ delay time	t_{COD}	—	0	—	0	ns	

HITACHI

HM514800CI Series, HM51S4800CI Series

Read-Modify-Write Cycle

HM514800CI, HM51S4800CI							
Parameter	Symbol	-7		-8		Unit	Notes
		Min	Max	Min	Max		
Read-modify-write cycle time	t _{RWC}	180	—	200	—	ns	
RAS to WE delay time	t _{RWD}	95	—	105	—	ns	10
CAS to WE delay time	t _{CWD}	45	—	45	—	ns	10
Column address to WE delay time	t _{AWD}	60	—	65	—	ns	10
OE hold time from WE	t _{OEH}	20	—	20	—	ns	

Refresh Cycle

HM514800CI, HM51S4800CI							
Parameter	Symbol	-7		-8		Unit	Notes
		Min	Max	Min	Max		
CAS setup time (CAS-before-RAS refresh cycle)	t _{CSR}	10	—	10	—	ns	
CAS hold time (CAS-before-RAS refresh cycle)	t _{CHR}	10	—	10	—	ns	
RAS precharge to CAS hold time	t _{RPC}	10	—	10	—	ns	
CAS precharge time in normal mode	t _{CPN}	10	—	10	—	ns	

Fast Page Mode Cycle

HM514800CI, HM51S4800CI							
Parameter	Symbol	-7		-8		Unit	Notes
		Min	Max	Min	Max		
Fast page mode cycle time	t_{PC}	45	—	50	—	ns	
Fast page mode $\overline{CAS}$ precharge time	t_{CP}	10	—	10	—	ns	
Fast page mode $\overline{RAS}$ pulse width	t_{RASC}	—	100000	—	100000	ns	12
Access time from $\overline{CAS}$ precharge	t_{ACP}	—	40	—	45	ns	3, 13
$\overline{RAS}$ hold time from $\overline{CAS}$ precharge	t_{RHCP}	40	—	45	—	ns	

HITACHI

HM514800CI Series, HM51S4800CI Series

Fast Page Mode Read-Modify-Write Cycle

HM514800CI, HM51S4800CI							
Parameter	Symbol	-7		-8		Unit	Notes
		Min	Max	Min	Max		
Fast page mode read-modify-write cycle CAS precharge to WE delay time	t_{CPW}	65	—	70	—	ns	
Fast page mode read-modify-write cycle time	t_{PCM}	95	—	100	—	ns	

Self Refresh Mode

HM51S4800CI							
Parameter	Symbol	-7		-8		Unit	Notes
		Min	Max	Min	Max		
RAS pulse width (self refresh)	t_{RAS}	100	—	100	—	μs	18, 19, 20
RAS precharge time (self refresh)	t_{RPS}	130	—	150	—	ns	
CAS hold time (self refresh)	t_{CHS}	-50	—	-50	—	ns	21

Notes: 1. AC measurements assume $t_r = 5$ ns.

- Assumes that $t_{RCD} \leq t_{RCD}(\text{max})$ and $t_{RAD} \leq t_{RAD}(\text{max})$. If t_{RCD} or t_{RAD} is greater than the maximum recommended value shown in this table, t_{RAC} exceeds the value shown.
- Measured with a load circuit equivalent to 2 TTL loads and 100 pF.
- Assumes that $t_{RCD} \geq t_{RCD}(\text{max})$ and $t_{RAD} \leq t_{RAD}(\text{max})$.
- Assumes that $t_{RCD} \leq t_{RCD}(\text{max})$ and $t_{RAD} \geq t_{RAD}(\text{max})$.
- $t_{OFF}(\text{max})$ defines the time at which the output achieves the open circuit condition and is not referred to output voltage levels.
- $V_{IH}(\text{min})$ and $V_{IL}(\text{max})$ are reference levels for measuring timing of input signals. Also, transition times are measured between V_{IH} and V_{IL} .
- Operation with the $t_{RCD}(\text{max})$ limit insures that $t_{RAC}(\text{max})$ can be met, $t_{RCD}(\text{max})$ is specified as a reference point only, if t_{RCD} is greater than the specified $t_{RCD}(\text{max})$ limit, then access time is controlled exclusively by t_{CAC} .
- Operation with the $t_{RAD}(\text{max})$ limit insures that $t_{RAC}(\text{max})$ can be met, $t_{RAD}(\text{max})$ is specified as a reference point only, if t_{RAD} is greater than the specified $t_{RAD}(\text{max})$ limit, then access time is controlled exclusively by t_{AA} .
- t_{WCS} , t_{RWD} , t_{CWD} and t_{AWD} are not restrictive operating parameters. They are included in the data sheet as electrical characteristics only: if $t_{WCS} \geq t_{WCS}(\text{min})$, the cycle is an early write cycle and the data out pin will remain open circuit (high impedance) throughout the entire cycle; if $t_{RWD} \geq t_{RWD}(\text{min})$, $t_{CWD} \geq t_{CWD}(\text{min})$, $t_{AWD} \geq t_{AWD}(\text{min})$ and $t_{CPW} \geq t_{CPW}(\text{min})$, the cycle is a read-modify-write and the data output will contain data read from the selected cell; if neither of the above sets of conditions is satisfied, the condition of the data out (at access time) is indeterminate.
- These parameters are referred to $\overline{\text{CAS}}$ leading edge in an early write cycle and to $\overline{\text{WE}}$ leading edge in a delayed write or a read-modify-write cycle.

HITACHI


HM514800CI Series, HM51S4800CI Series

12. t_{RASC} defines $\overline{RAS}$ pulse width in fast page mode cycles.
13. Access time is determined by the longest among t_{AA} , t_{CAC} and t_{ACP} .
14. An initial pause of 100 μs is required after power up followed by a minimum of eight initialization cycles ($\overline{RAS}$ -only refresh cycle or $\overline{CAS}$ -before- $\overline{RAS}$ refresh cycle). If the internal refresh counter is used, a minimum of eight $\overline{CAS}$ -before- $\overline{RAS}$ refresh cycles is required.
15. In delayed write or read-modify-write cycles, $\overline{OE}$ must disable output buffer prior to applying data to the device.
16. Either t_{RCH} or t_{RRH} must be satisfied for a read cycle.
17. The supply voltage with all V_{CC} pins must be on the same level.
The supply voltage with all V_{SS} pins must be on the same level.
18. t_{RASS} is not guaranteed spec for executing self refresh. It is necessary to satisfy t_{RPS} , t_{CHS} when t_{RASS} is shorter than $t_{RASS}(\text{min})$. Then, refresh operation is not guaranteed that for executing $t_{RASS}(\text{min})$ cycles.
19. If you use distributed CBR refresh mode with 15.6 μs interval in normal read/write cycle, CBRrefresh should be executed within 15.6 μs immediately after exiting from and before entering into self refresh mode.
20. If you use $\overline{RAS}$ only refresh or CBR burst refresh mode in normal read/write cycle, 1024 cycles of distributed CBR refresh with 15.6 μs interval should be executed within 16 ms immediately after exiting from and before entering into the self refresh mode.
21. Repetitive self refresh mode without refreshing all memory is not allowed. Once you exit from self refresh mode, all memory cells need to be refreshed before re-entering the self refresh mode again.
22. ///: H or L (H: $V_{IH}(\text{min}) \leq V_{IN} \leq V_{IH}(\text{max})$, L: $V_{IL}(\text{min}) \leq V_{IN} \leq V_{IL}(\text{max})$)
XXX: Invalid Dout
When the address, clock and input pins are not described on timing waveforms, their pins must be applied V_{IH} or V_{IL} .

HITACHI

Timing Waveforms^{*22}


Read Cycle

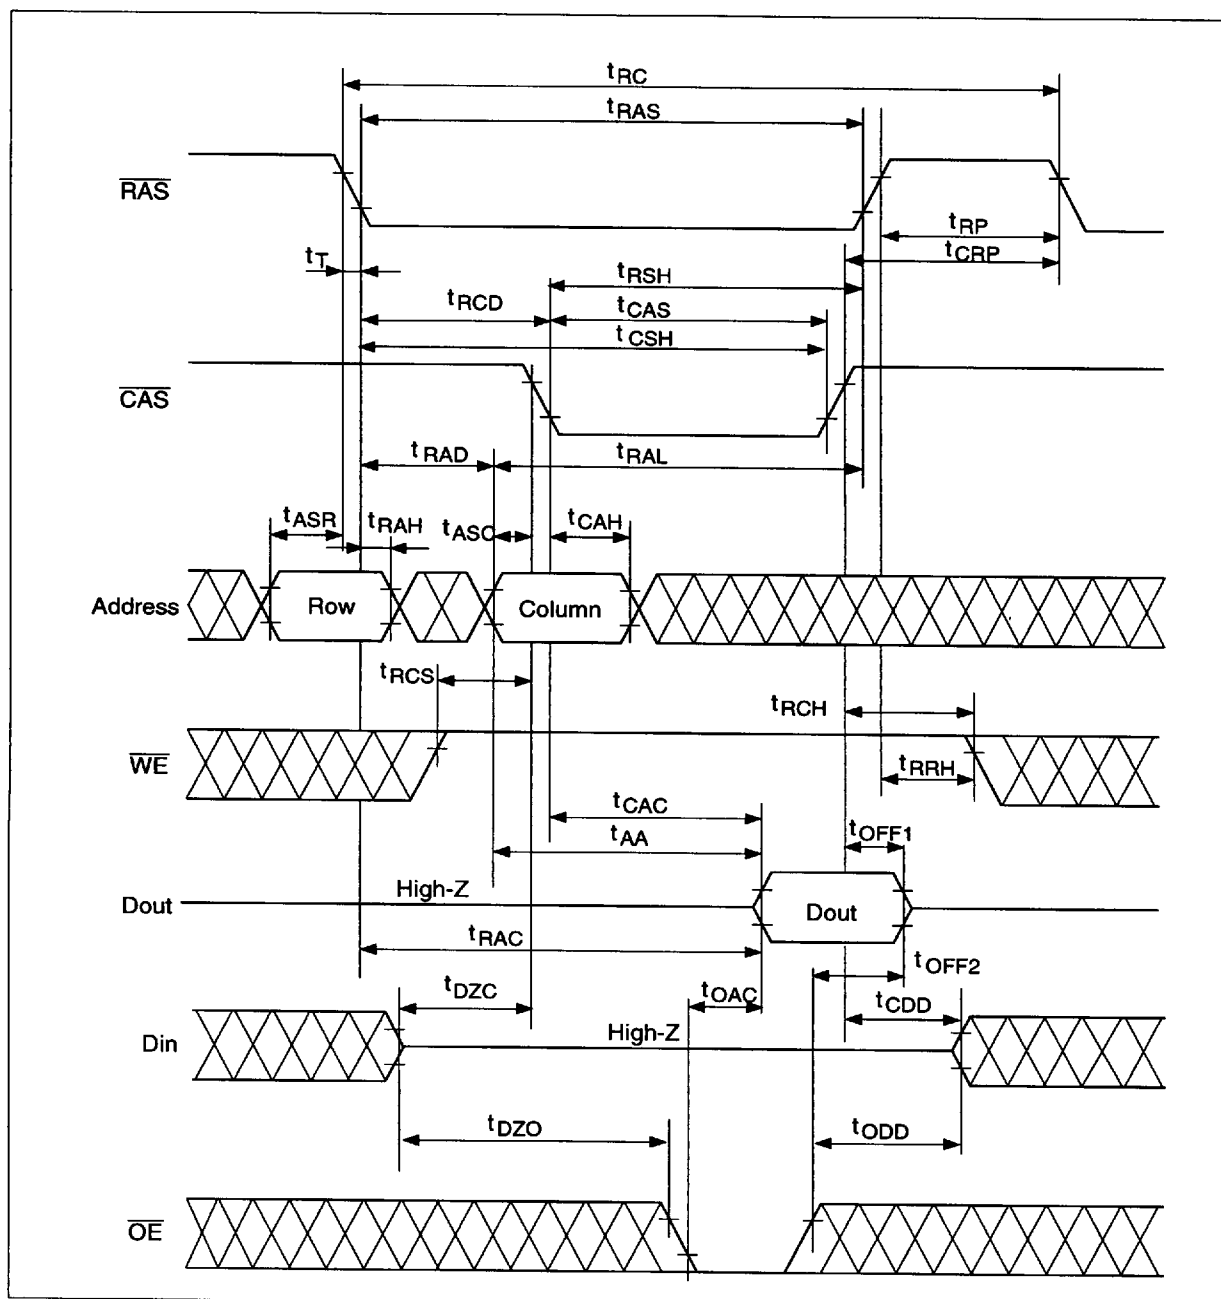

HITACHI

HM514800CI Series, HM51S4800CI Series


Early Write Cycle

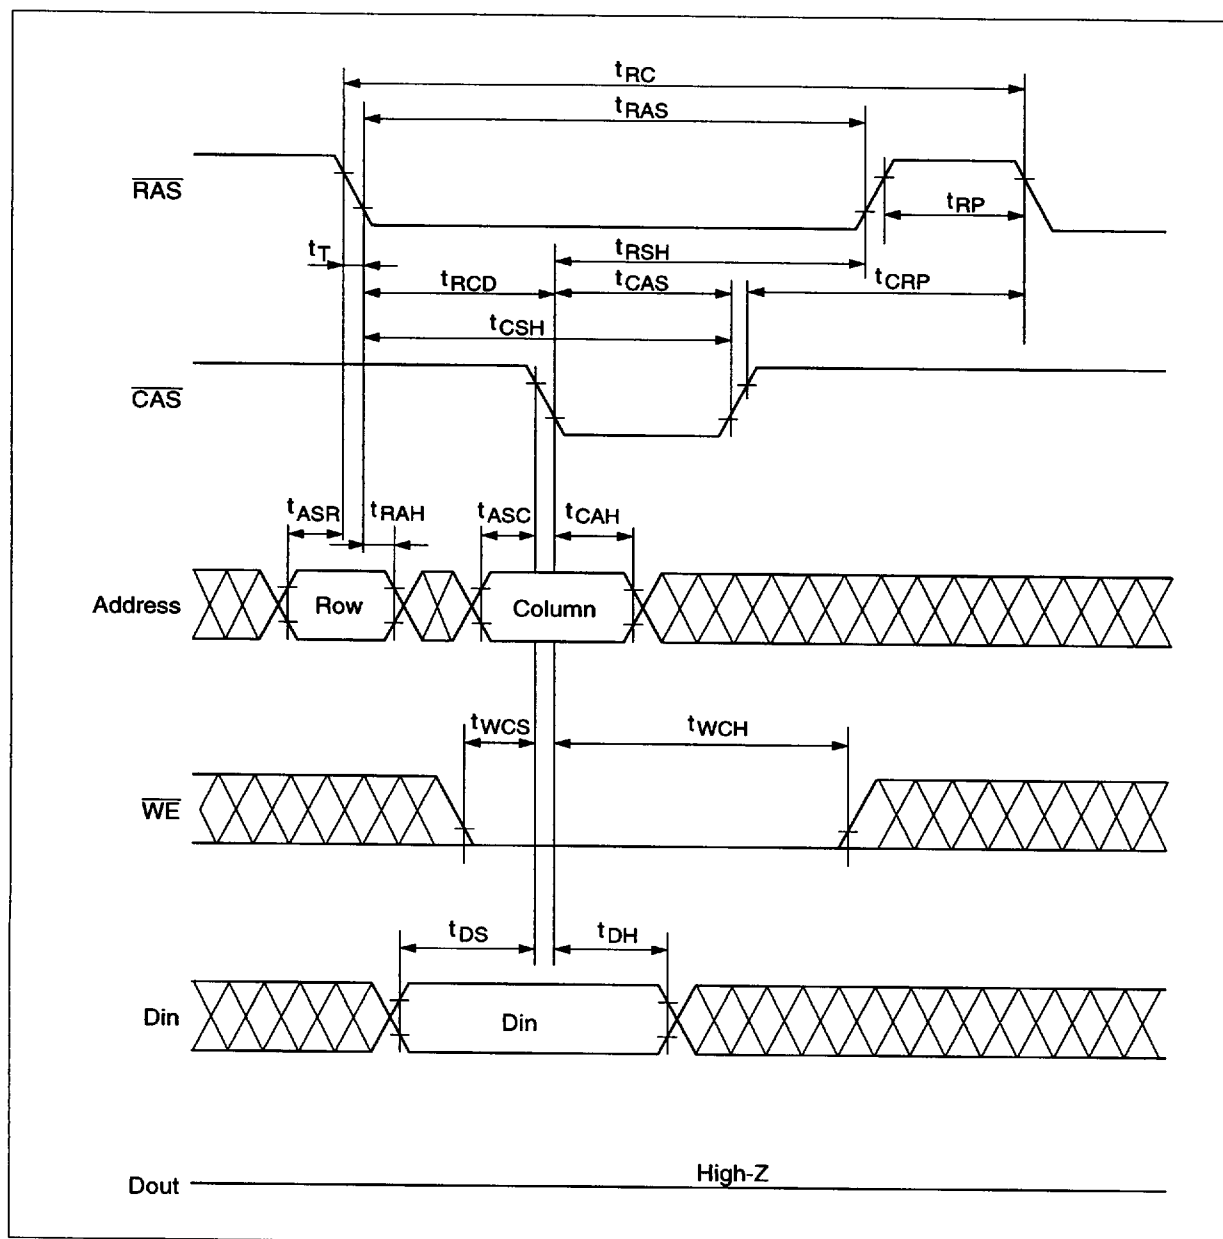

HITACHI

HM514800CI Series, HM51S4800CI Series


Delayed Write Cycle

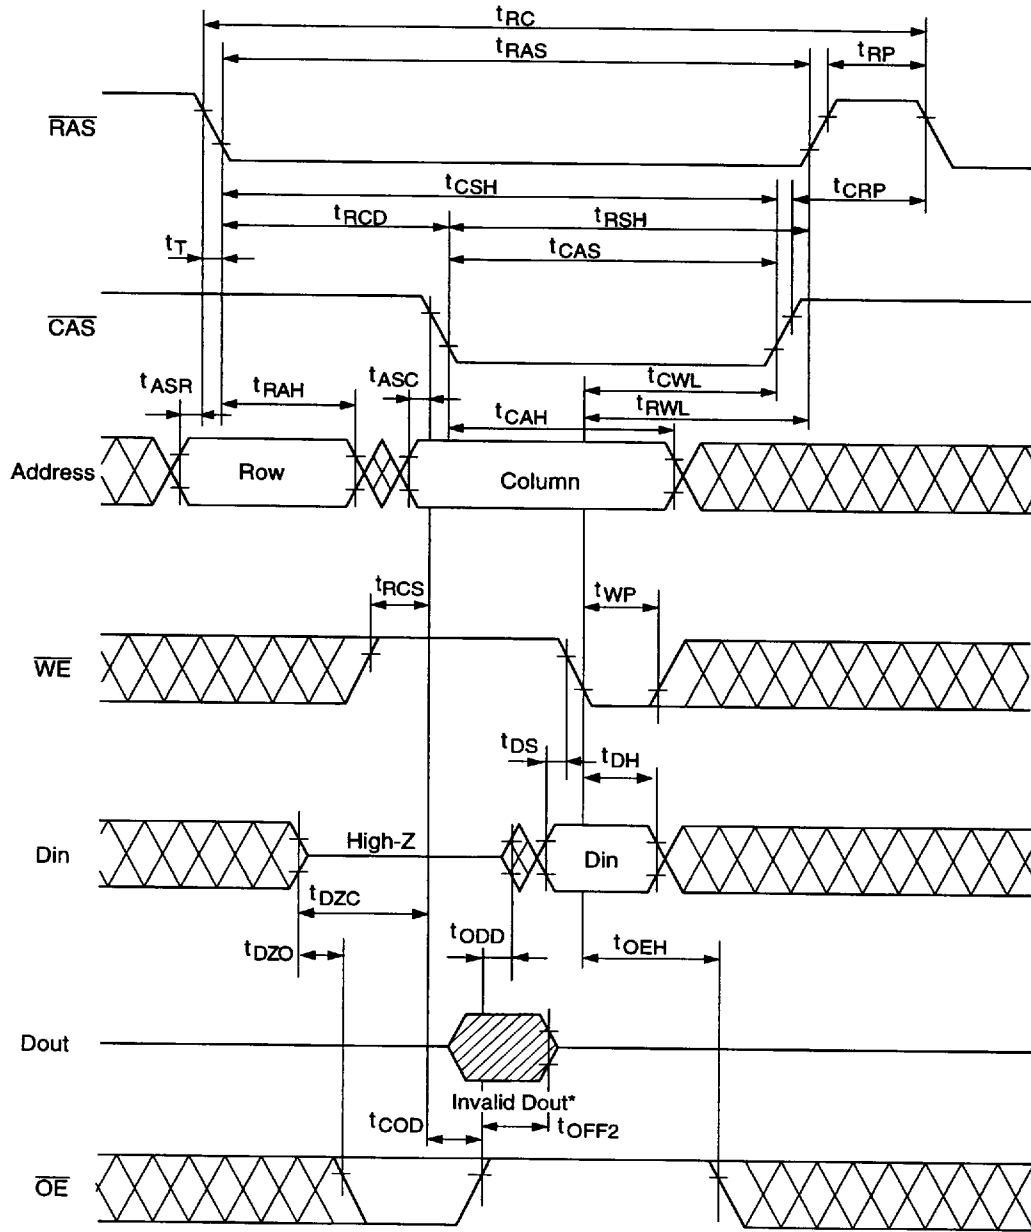

* Do not enable Dout during delayed write cycle.


HITACHI

Read-Modify-Write Cycle

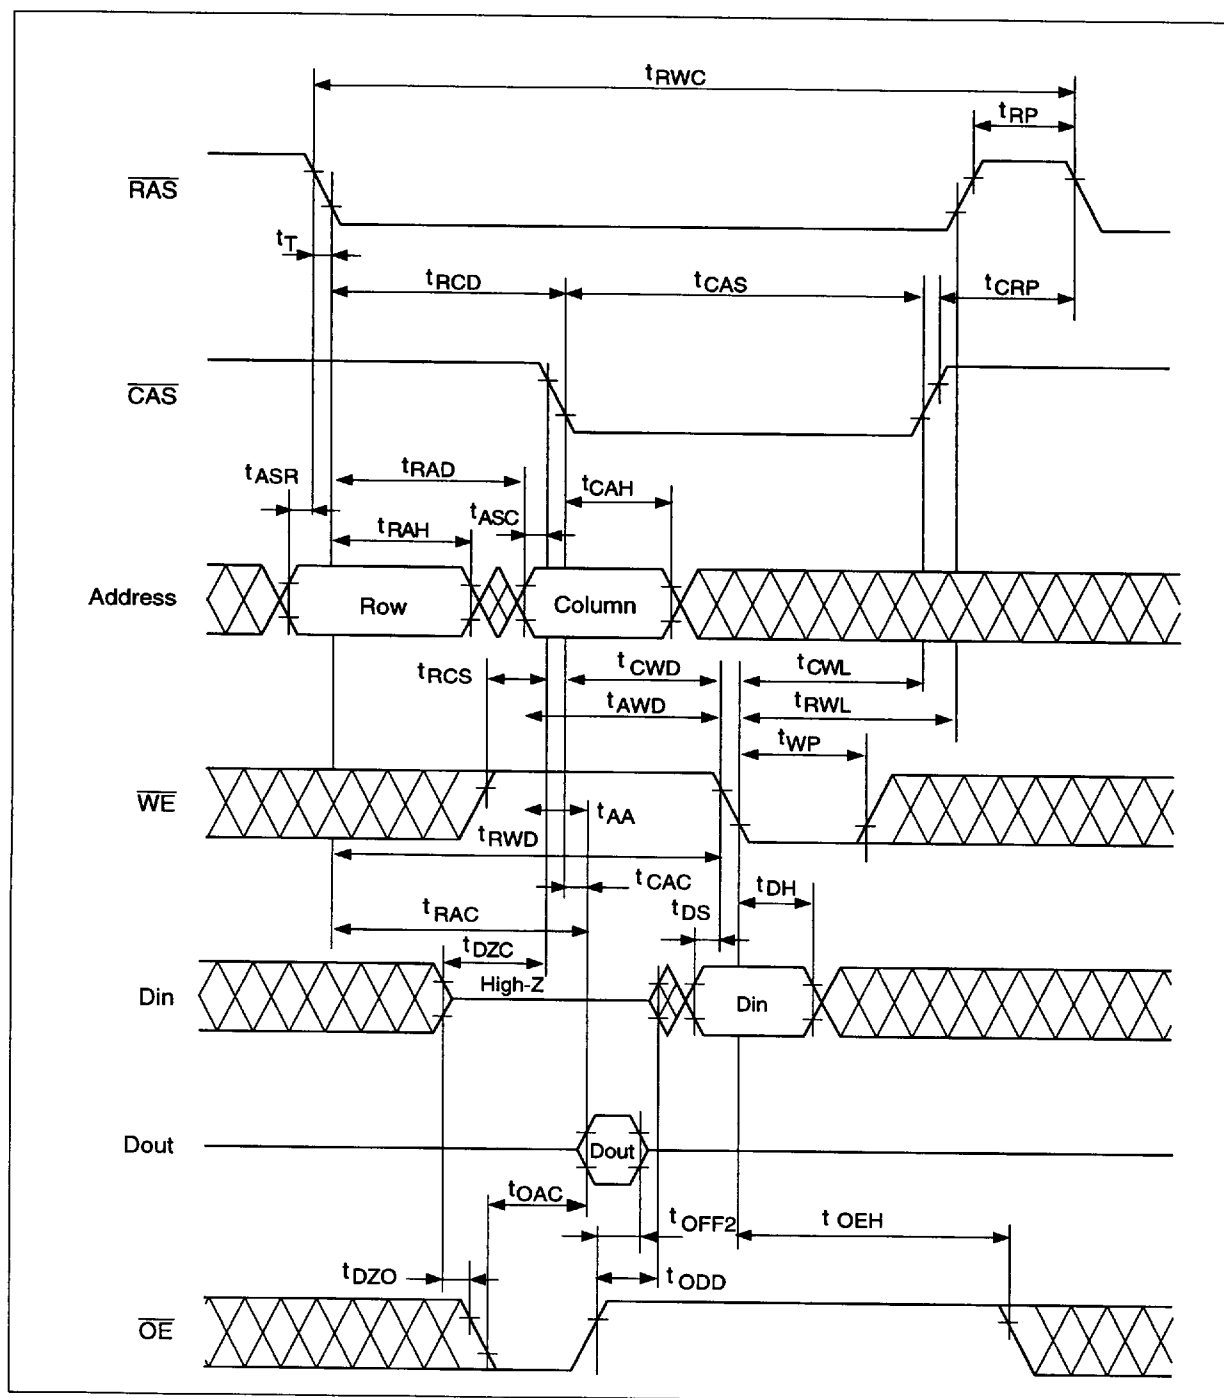**HITACHI**

HM514800CI Series, HM51S4800CI Series


RAS-Only Refresh Cycle

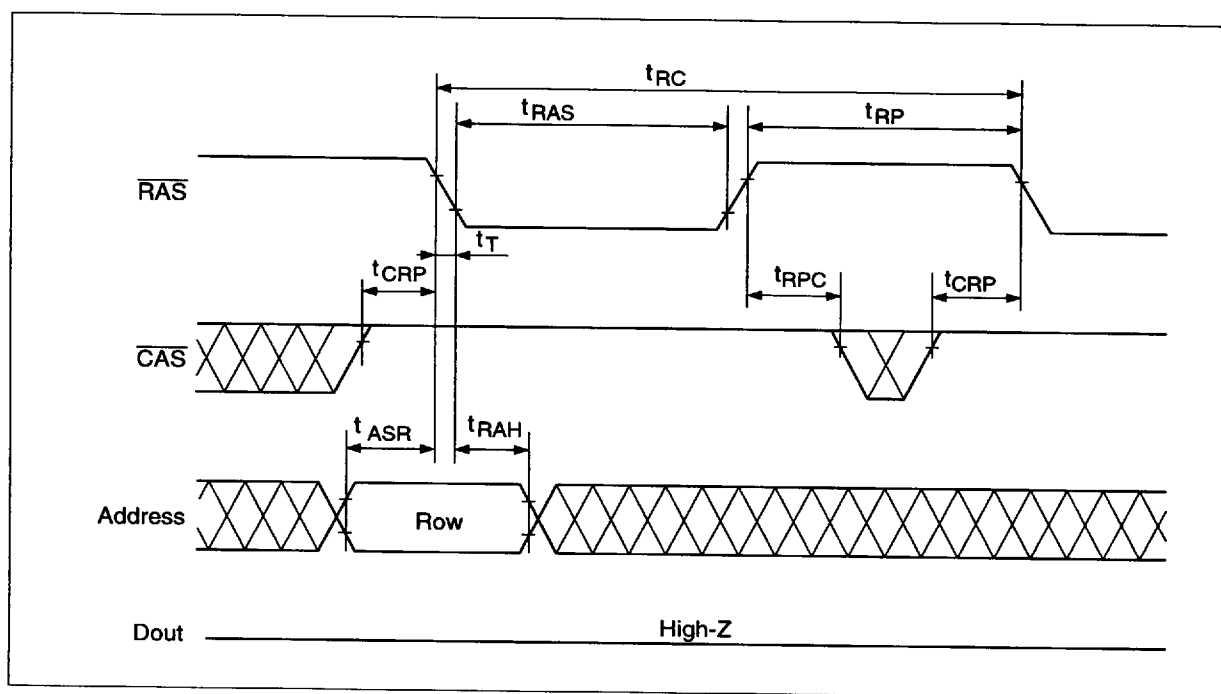


HITACHI

HM514800CI Series, HM51S4800CI Series

CAS-Before-RAS Refresh Cycle

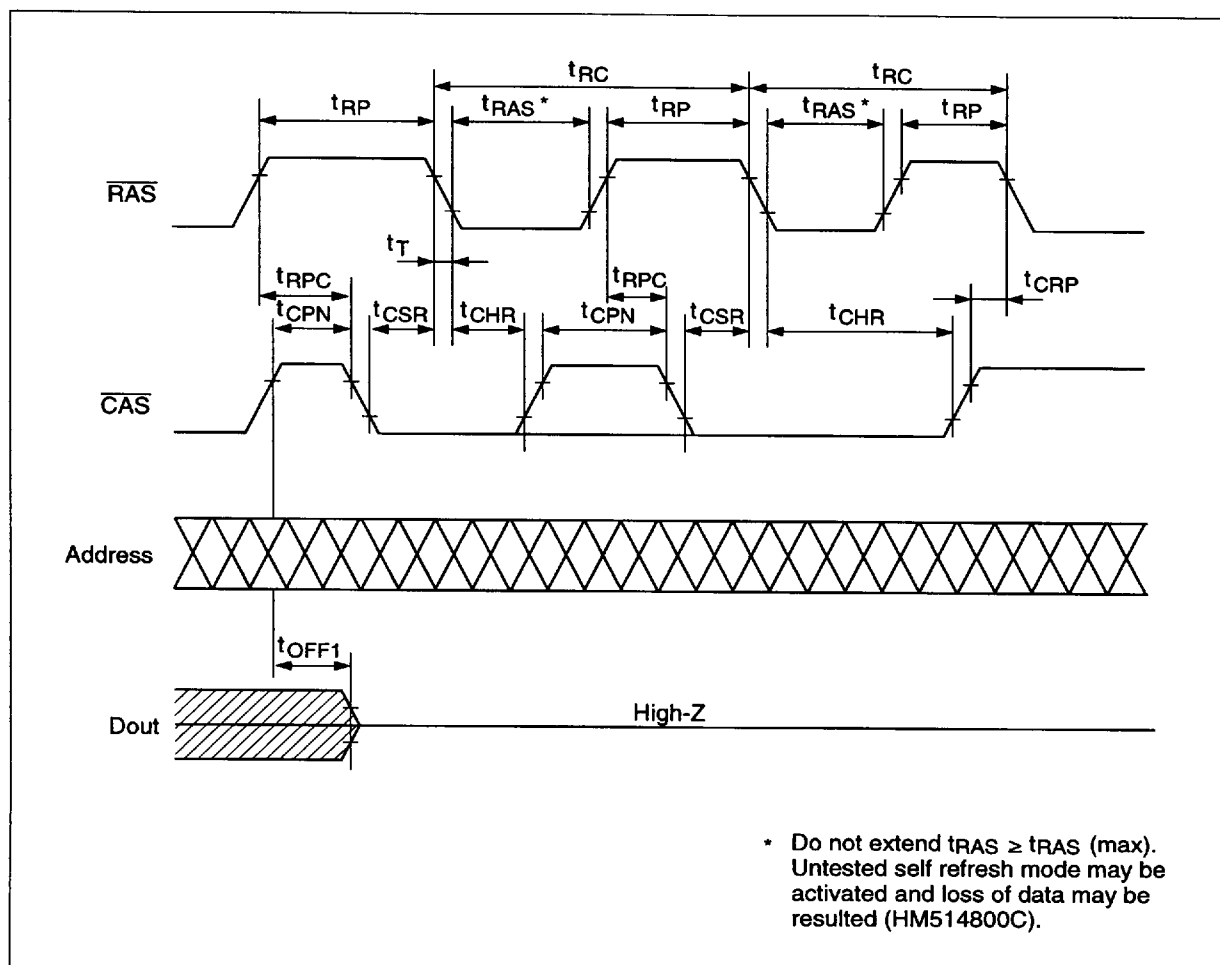

HITACHI

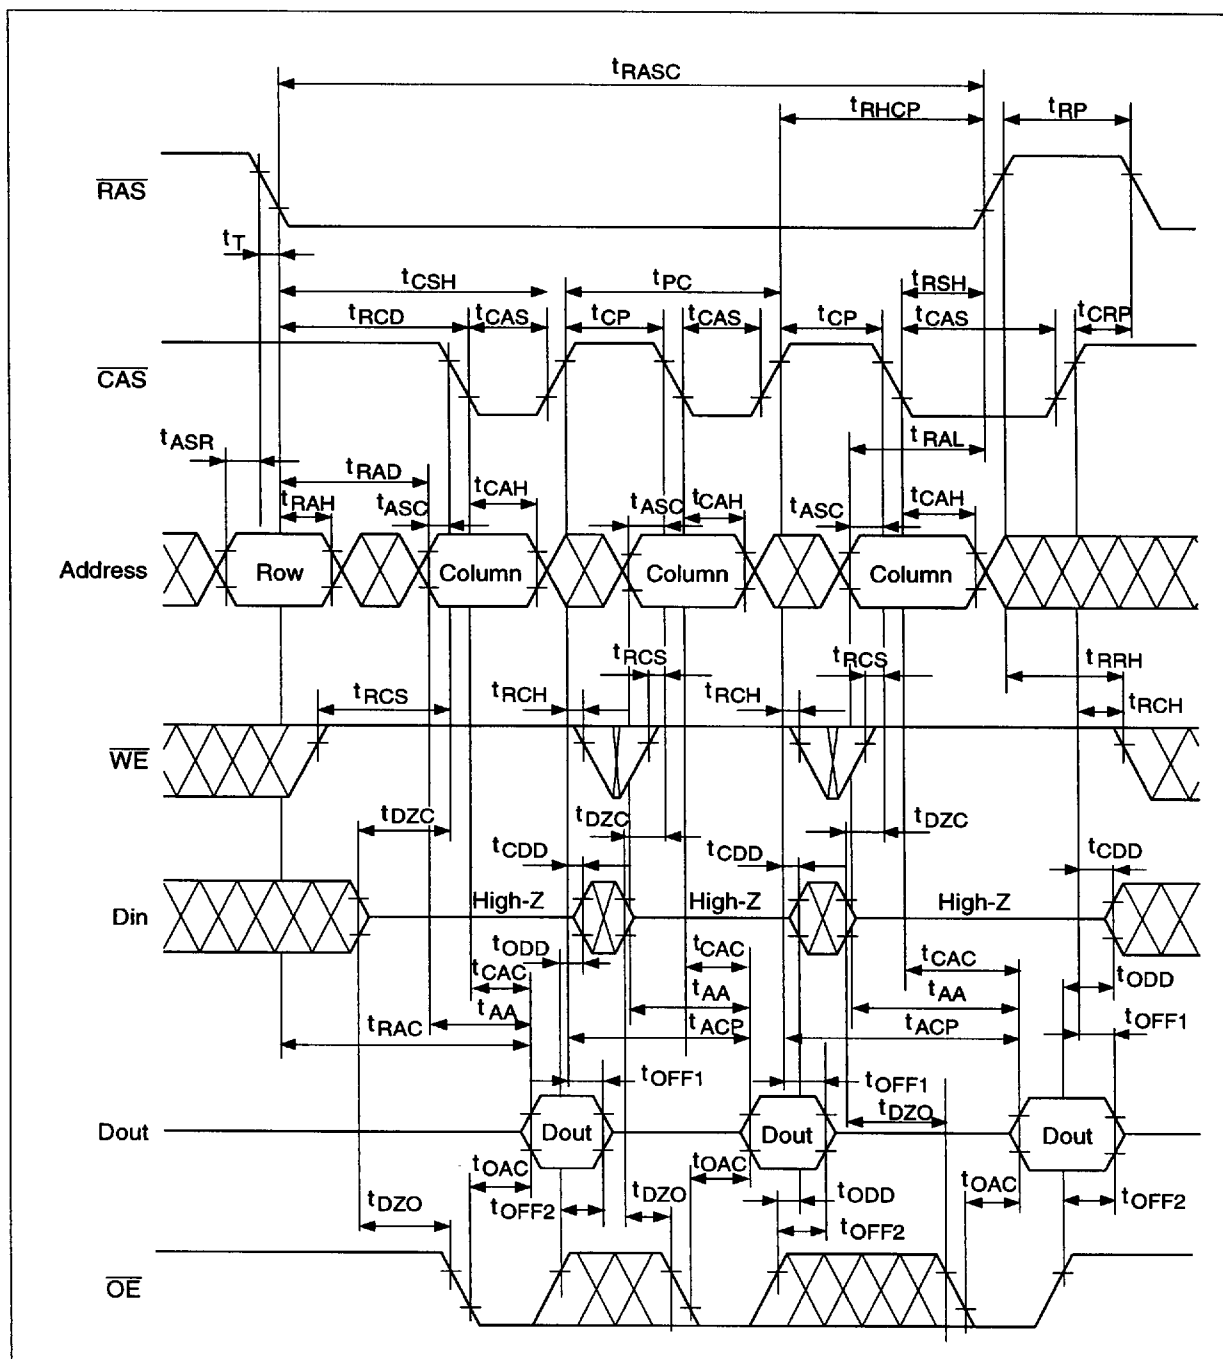


19


4496203 0026978 684

HM514800CI Series, HM51S4800CI Series

Fast Page Mode Early Write Cycle

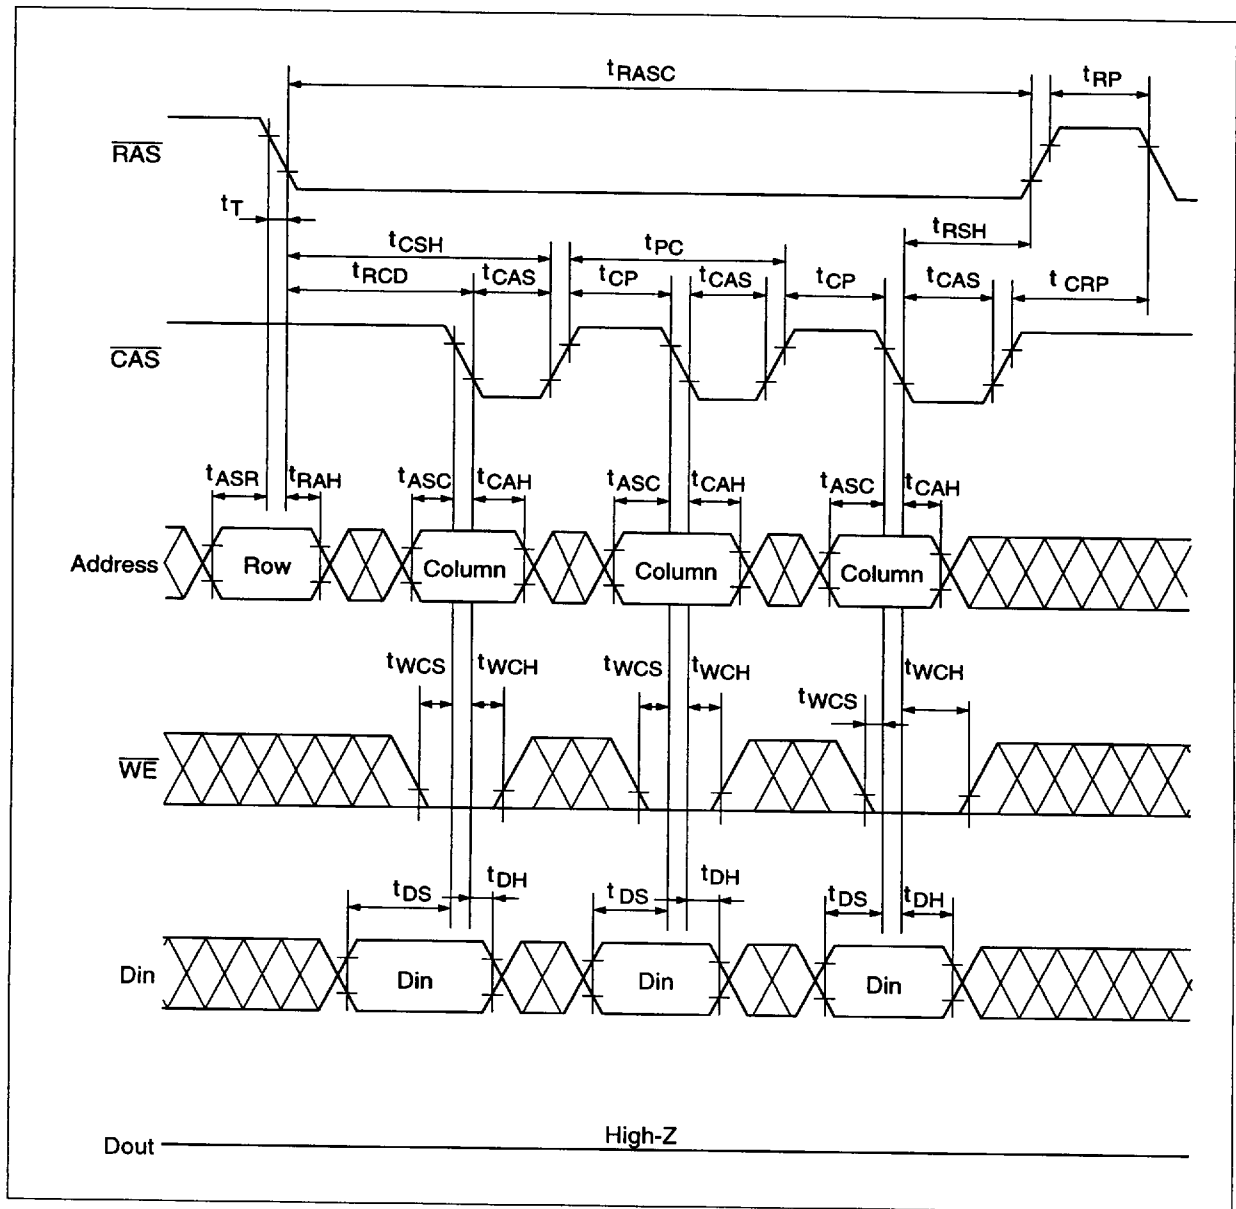


HITACHI

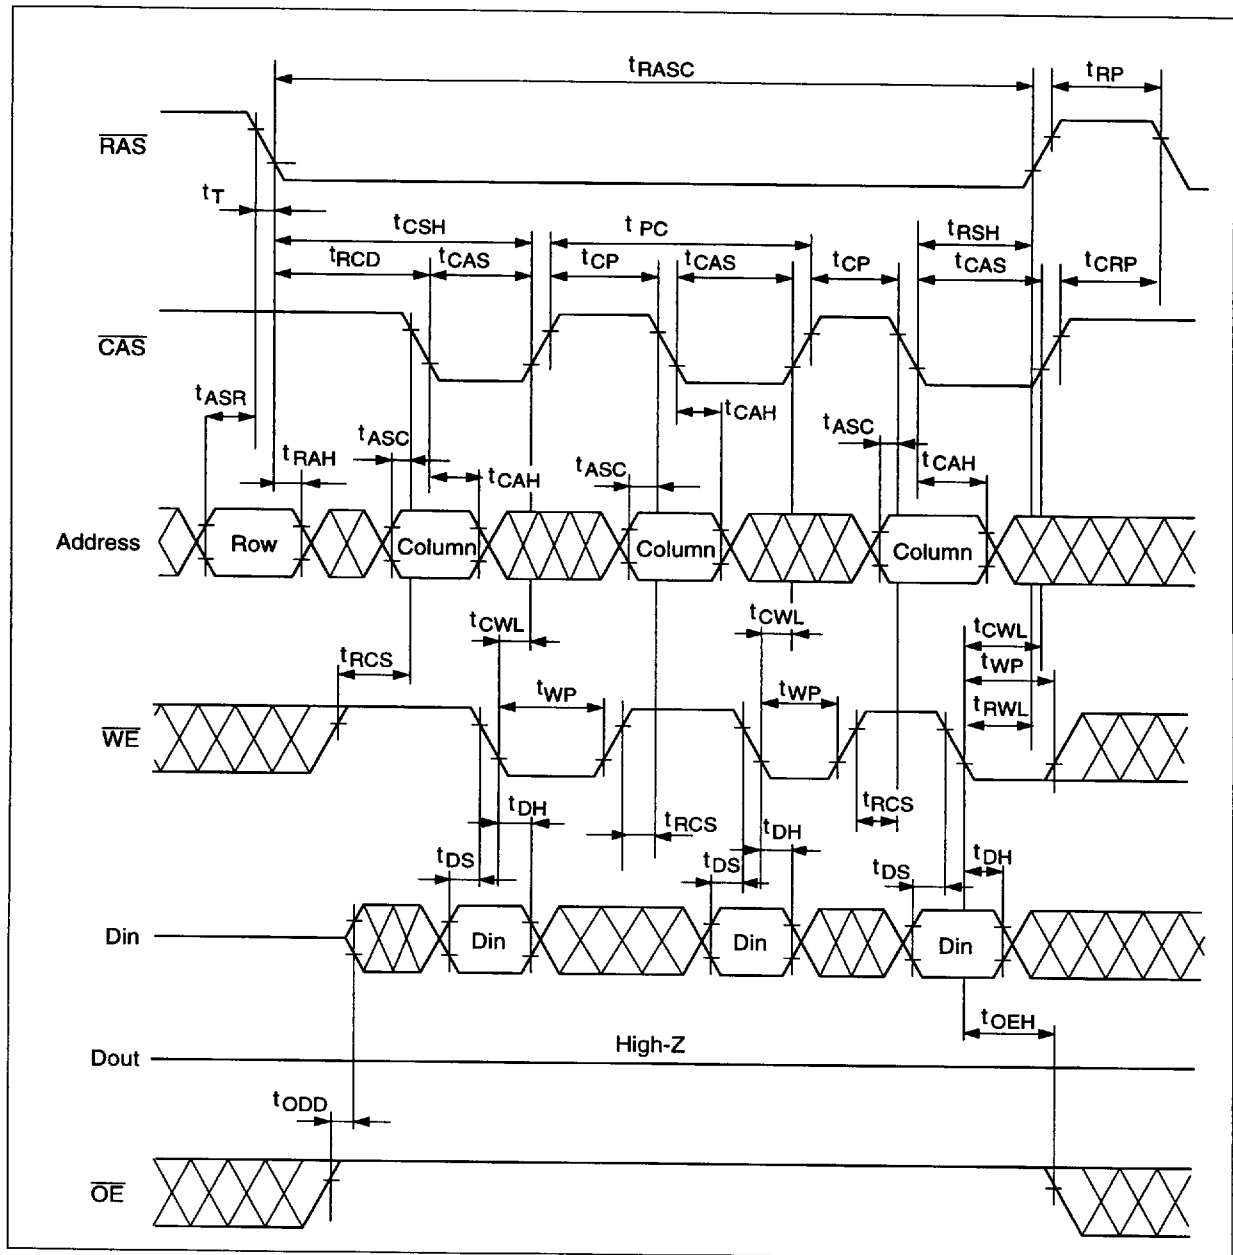

21

4496203 0026980 232

Fast Page Mode Read-Modify-Write Cycle

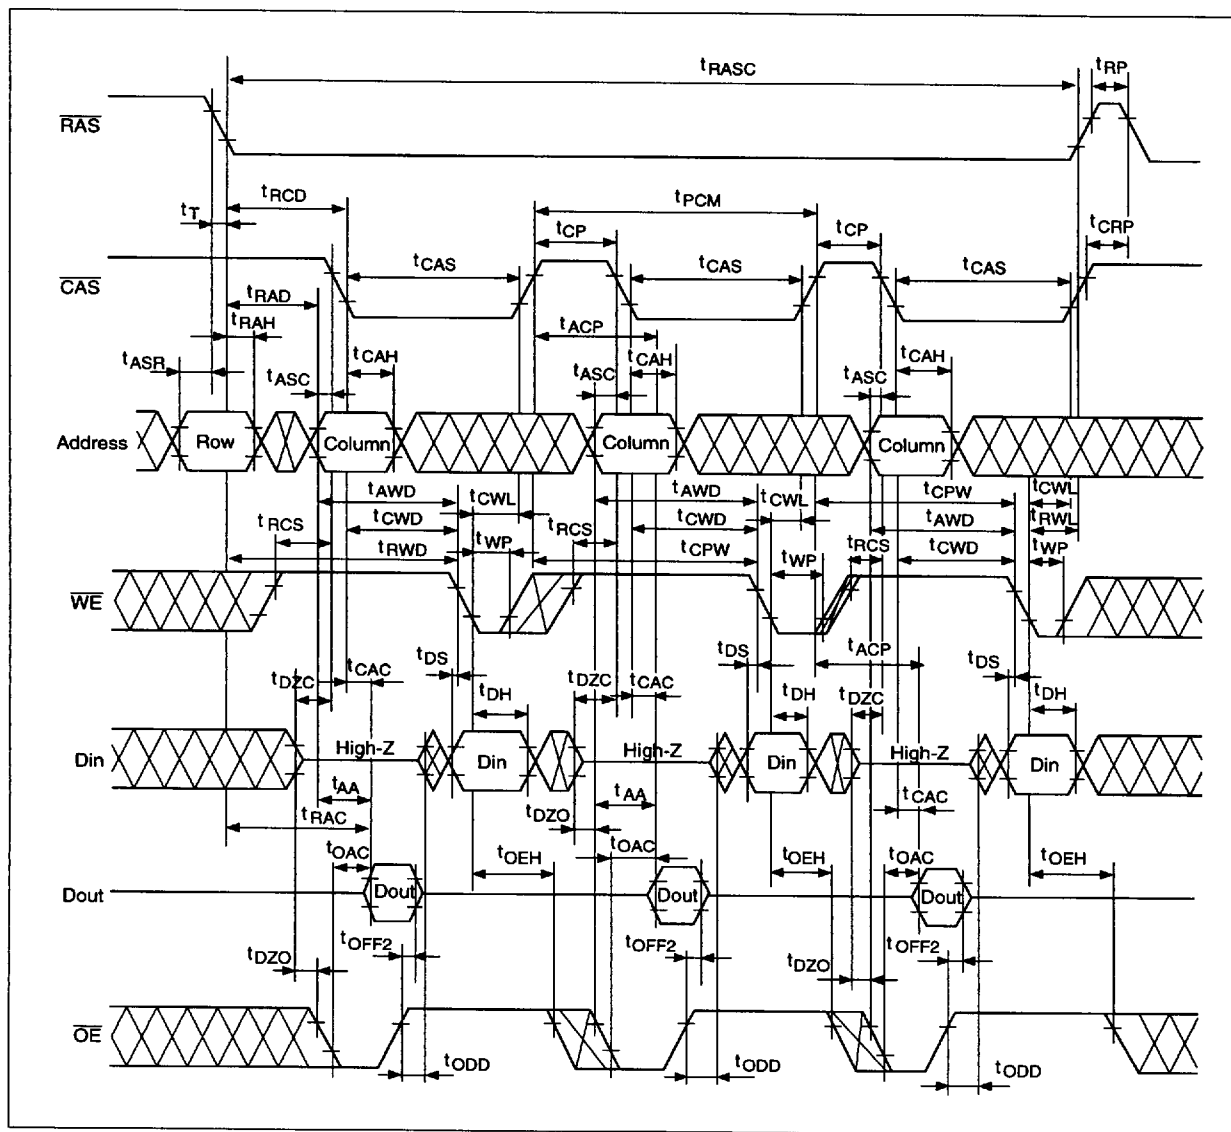


22

4496203 0026981 179

HM514800CI Series, HM51S4800CI Series

Self Refresh Cycle*18, 19, 20, 21

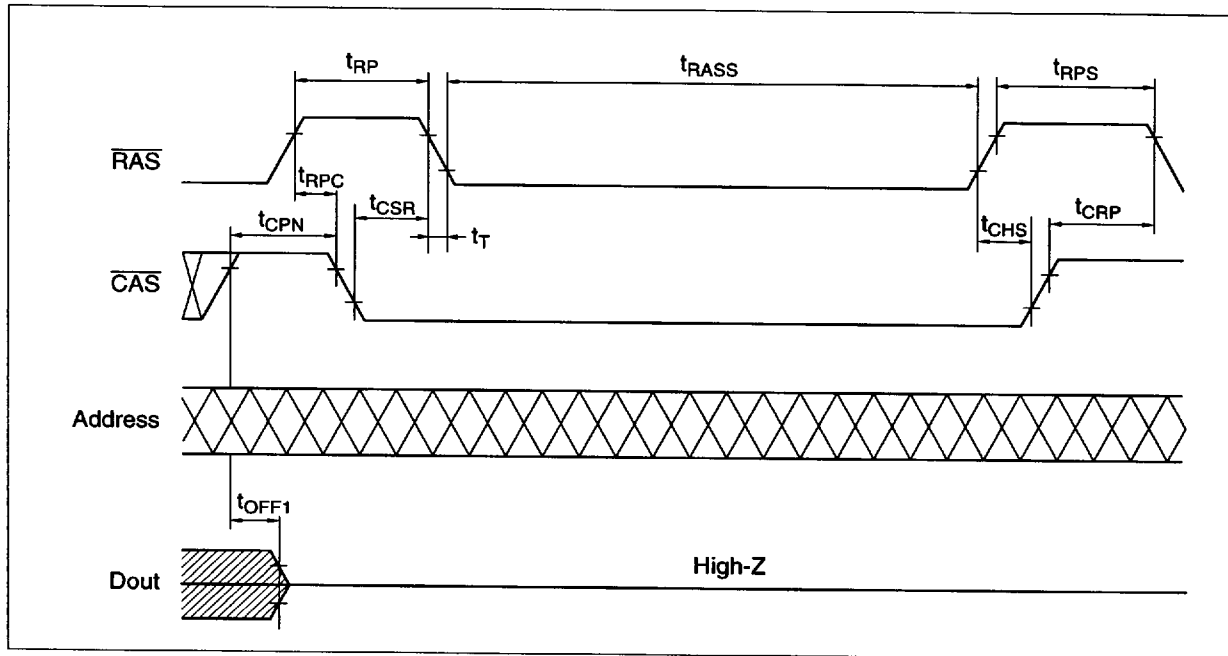


HITACHI

HM514800CI Series, HM51S4800CI Series

Package Dimensions

HM514800CJI/CLJI Series, HM51S4800CJI/CLJI Series (CP-28D)

Unit: mm

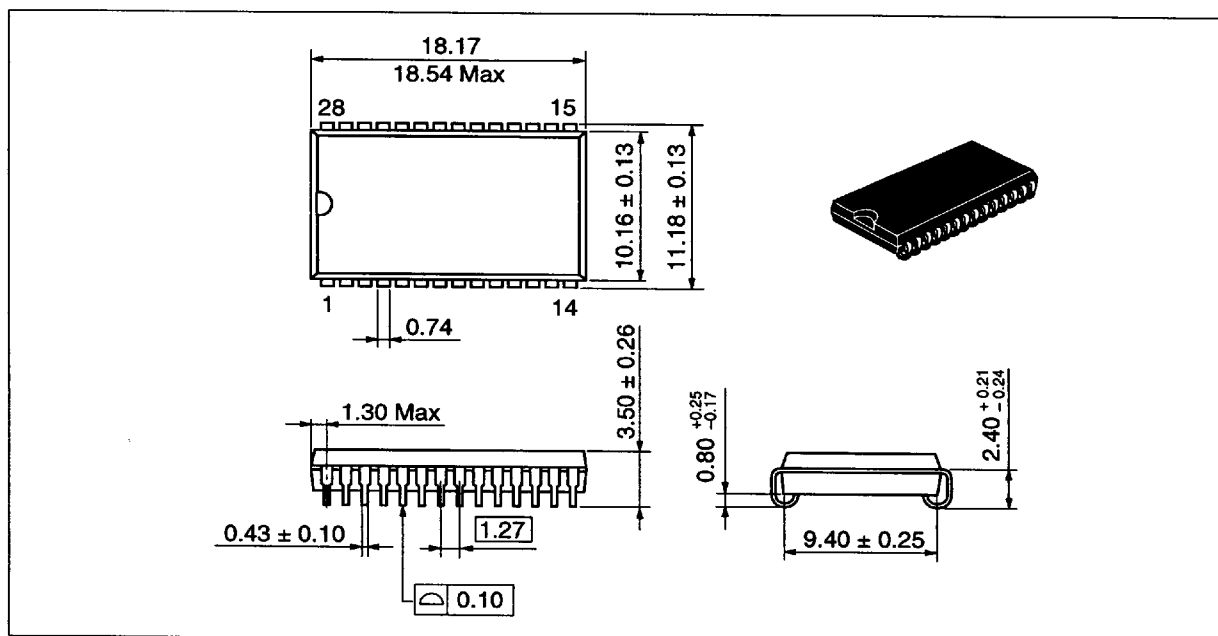

HITACHI