

### Product Features

- Solid-state linear amplifier design
- GaN on SiC HEMT
- Small and light weight
- Wide Band Operation 500~2500MHz
- 50 Ohm Input/Output impedance matched
- Highly reliable and rugged design
- Harsh environmental condition
- High efficiency
- 25W typical Psat

### Application

- Broadband communication
- Broadcasting
- General purpose RF amplifier
- Linear applications in the L/S Frequency Bands



### Description

The RUP15020-11 is designed for RF system application frequencies from 500MHz to 2.5GHz.

This Pallet Amplifier uses GaN on SiC HEMT technology which performs high breakdown voltage, high linearity, wide bandwidth and high efficiency.

### Electrical Specifications @ VDD=+30VDC, T=25°C, 50Ω System

PARAMETER	Symbol	Min	Typ	Max	Unit
Frequency Range	BW	500		2500	MHz
Output Power CW	Psat	10	25		Watt
Output Power @ P3dB G.C.P	P <sub>3dB</sub>	5	15		Watt
Small Signal Gain	SSG		50		dB
Small Signal Gain Flatness	ΔG		± 1.5	± 2.0	dB
Input VSWR	S11		2.0 : 1	2.5 : 1	-
Harmonics @ P1dB G.C.P	H		-10		dBc
Spurious Signals	Spur		-70	-60	dBc
Operating Voltage	VDC	28	30	32	Volt
Supply Current @ P3 CW	IDD		2.5	3.5	Amp
Supply Current @ Psat CW	IDD		3.5	5	Amp

\* Please DO NOT ENTER RF INPUT POWER OVER +5dBm. (to prevent the main from damaging)

### Environmental Characteristics

PARAMETER	Symbol	Min	Typ	Max	Unit
Operating Case Temperature	T <sub>c</sub>	0		+70	°C
Storage Temperature	T <sub>s</sub>	-40		+85	°C



### Mechanical Specifications

PARAMETER	Value	Units	Limits
Dimensions ( L x W x H )	120 x 71 x 18.5	mm	
RF Connectors In/Out	SMA Female		
Cooling	External Heat sink + airflow		

### Interface Connectors

Pin #	Description	Specifications
1	On/Off	Ground On, Floating & Positive Voltage Off
2	GND	Ground
3	GND	Ground
4	GND	Ground
5	Temp Monitor	25°C 0.75V
6	GND	Ground
7	GND	Ground
8	+Vdd	+30 Drain to Source Voltage
9	+Vdd	+30 Drain to Source Voltage
10	+Vdd	+30 Drain to Source Voltage

### Outline Drawing


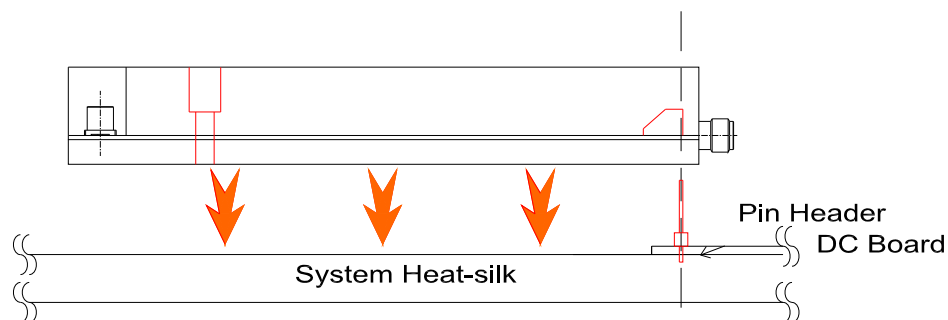
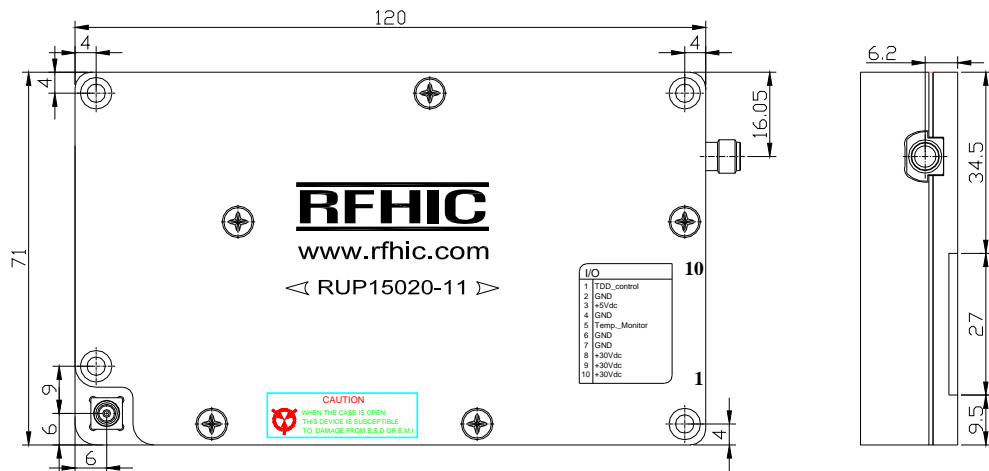


## Typical Performance Chart @ 25°C

RFHIC RUP15020-11 Test Result								
Freq. [MHz]	P3 Output Power, Current, Efficiency				P <sub>sat</sub> Output Power, Current, Efficiency			
	Output [dBm]	Output [Watt]	Current [A]	Efficiency [%]	Output [dBm]	Output [Watt]	Current [A]	Efficiency [%]
500	40.65	11.61	1.88	22.06	42.52	17.86	2.34	27.27
600	40.54	11.32	2.07	19.54	43.53	22.54	3.45	23.34
700	39.86	9.68	2.07	16.71	43.34	21.58	3.17	24.31
800	39.86	9.68	2.15	16.08	43.39	21.83	3.00	25.98
900	40.58	11.43	2.28	17.90	43.75	23.71	3.03	27.95
1000	42.58	18.11	2.77	23.35	44.66	29.24	3.29	31.74
1100	42.57	18.07	2.93	22.03	45.15	32.73	3.41	34.28
1200	43.84	24.21	3.19	27.10	45.07	32.14	3.40	33.76
1300	43.95	24.83	3.26	27.20	44.96	31.33	3.43	32.62
1400	42.98	19.86	3.02	23.49	45.22	33.27	3.64	32.64
1500	42.15	16.41	2.88	20.34	45.29	33.81	4.17	28.95
1600	42.13	16.33	3.18	18.34	44.94	31.19	4.44	25.08
1700	40.9	12.30	2.69	16.33	44.69	29.44	3.95	26.62
1800	41.62	14.52	2.70	19.21	45.16	32.81	3.74	31.33
1900	41.88	15.42	2.61	21.10	45.34	34.20	3.63	33.64
2000	42.55	17.99	2.62	24.52	45.54	35.81	3.54	36.13
2100	42.1	16.22	2.40	24.13	45.44	34.99	3.36	37.19
2200	42.48	17.70	2.40	26.34	45.23	33.34	3.34	35.65
2300	41.95	15.67	2.21	25.32	44.82	30.34	3.28	33.03
2400	43.2	20.89	2.34	31.89	44.71	29.58	2.84	37.19
2500	42.47	17.66	2.18	28.93	43.86	24.32	2.63	33.03

RFHIC Corporation (RFHIC) reserves the right to make changes to any products herein or to discontinue any product at any time without notice. RFHIC do not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. The product specifications herein expressed have been carefully checked and are assumed to be reliable. However, RFHIC disclaims liability for inaccuracies and strongly recommends buyers to verify that the information they are using is current before placing purchase orders. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such use. RFHIC's liability under or arising out of damages, claims of whatsoever kind and nature which RFHIC products could cause shall be limited in amount to the net purchase price of the products sold to buyer by RFHIC.

Typical Performance Chart @ 25°C

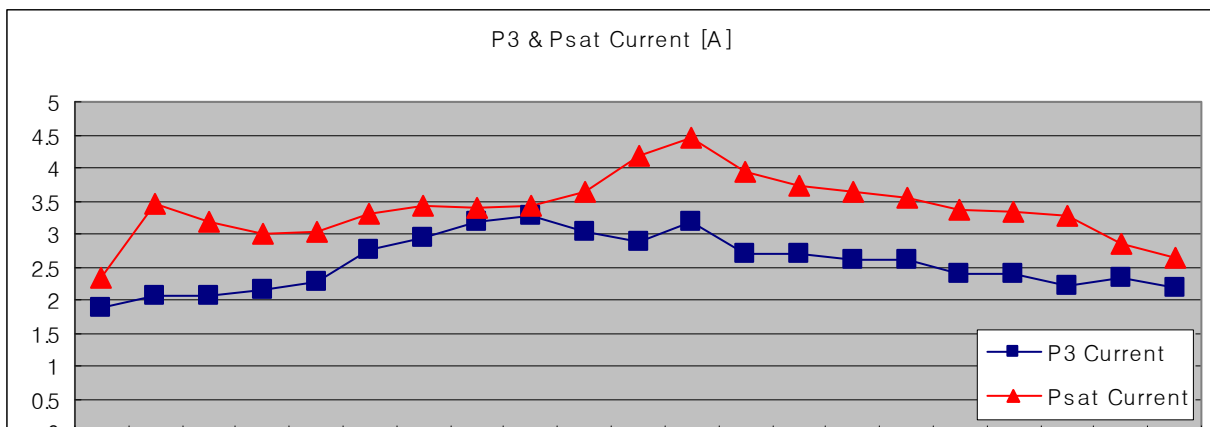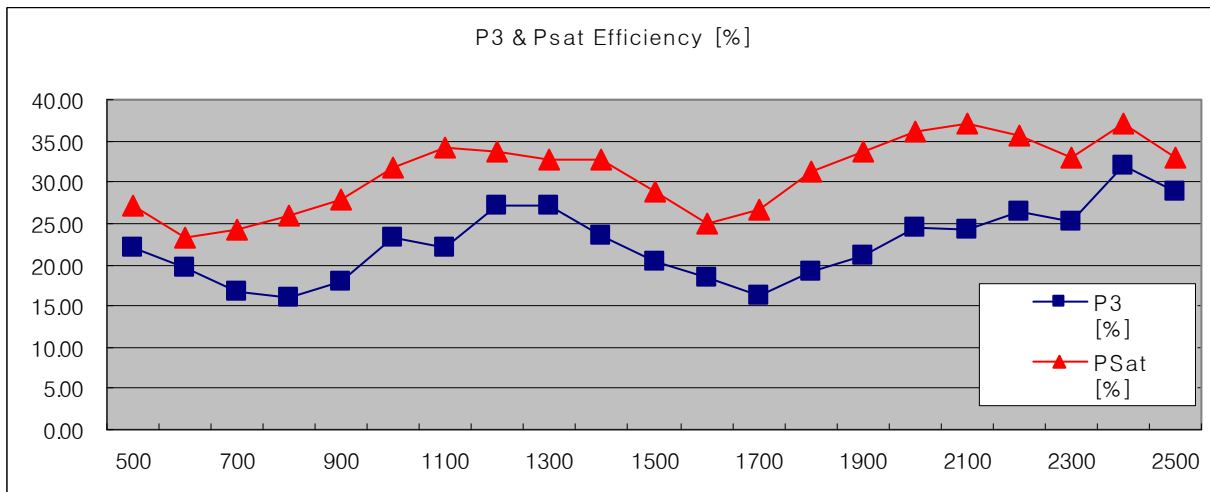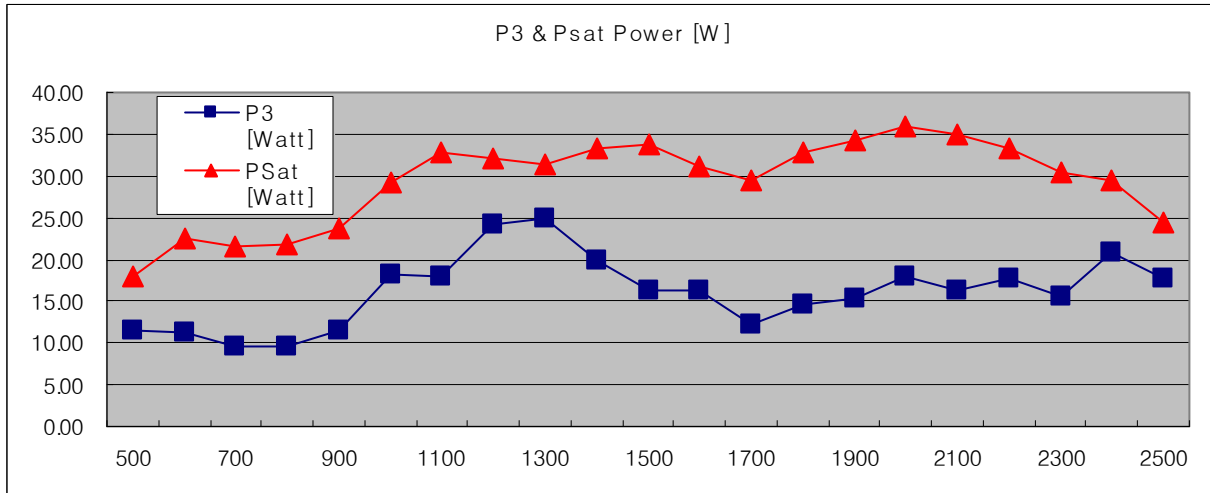

RFHIC Corporation (RFHIC) reserves the right to make changes to any products herein or to discontinue any product at any time without notice. RFHIC do not assume any liability for the reliability of its products for any particular purpose, and disclaims all liability, including without limitation consequential or incidental damages. The product specifications herein expressed have been carefully checked and are assumed to be reliable. However, RFHIC disclaims liability for inaccuracies and strongly recommends buyers to verify that the information they are using is current before placing purchase orders. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such use. RFHIC's liability under or arising out of damages, claims of breach of contract and claims which RFHIC products could cause shall be limited in amount to the net purchase price of the products sold to buyer by RFHIC.