


FEATURES

- * SELECTED TO SPECIFIC ON-LINE INTENSITY AND RADIANT INTENSITY RANGES
- * LOW COST MINIATURE PLASTIC SIDE LOOKING PACKAGE
- * MECHANICALLY AND SPECTRALLY MATCHED TO THE LTR-5886DHP4-M SERIES OF PHOTOTRANSISTOR

PACKAGE DIMENSIONS

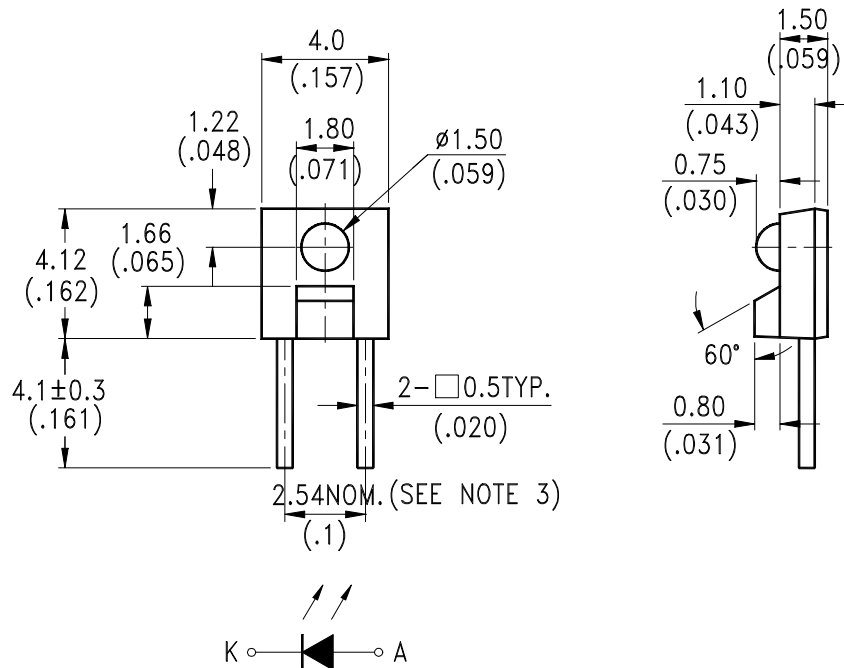

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}(.010\text{'})$ unless otherwise noted.
3. Lead spacing is measured where the leads emerge from the package.
4. Specifications are subject to change without notice.




ABSOLUTE MAXIMUM RATINGS AT TA=25°C

PARAMETER	MAXIMUM RATING	UNIT
Power Dissipation	75	mW
Peak Forward Current (300pps, 10 μ s pulse)	1	A
Continuous Forward Current	50	mA
Reverse Voltage	5	V
Operating Temperature Range	-10°C to + 50°C	
Storage Temperature Range	-40°C to + 70°C	
Lead Soldering Temperature [1.6mm(.063") From Body]	260°C for 5 Seconds	

ELECTRICAL / OPTICAL CHARACTERISTICS AT TA=25°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION.	BIN No.
Peak Emission Wavelength	λ_p	930	940	970	nm	$I_F = 20\text{mA}$	
Spectral Line Half-Width	$\Delta \lambda$		50		nm	$I_F = 20\text{mA}$	
Forward Voltage	V_F		1.2	1.5	V	$I_F = 20\text{mA}$	
Reverse Current	I_R			10	μA	$V_R = 5\text{V}$	
Axis Intensity (Light Current) Setting of LITE-ON Production(Average Light Current of 2 Phototransister, $(I_{L1}+I_{L2})/2$)	(I_L)	0.605		0.945	mA	$I_F = 4\text{mA}$ $V_{CC} = 3.5\text{V}$	BINA
		0.945		1.30			BINB
Axis Intensity (Light Current) Setting of LITE-ON Q.C (Average Light Current of 2 Phototransister, $(I_{L1}+I_{L2})/2$)	(I_L)	0.550		1.050	mA	$I_F = 4\text{mA}$ $V_{CC} = 3.5\text{V}$	BINA
		0.787		1.560			BINB
Viewing Angle (See FIG.6)	$2\theta_{1/2}$		40		deg.		
Axis Intensity Ratio(I_{L1}/I_{L2})	R	0.8	1.0	1.2			

INFRARED AXIS INTENSITY TEST METHOD

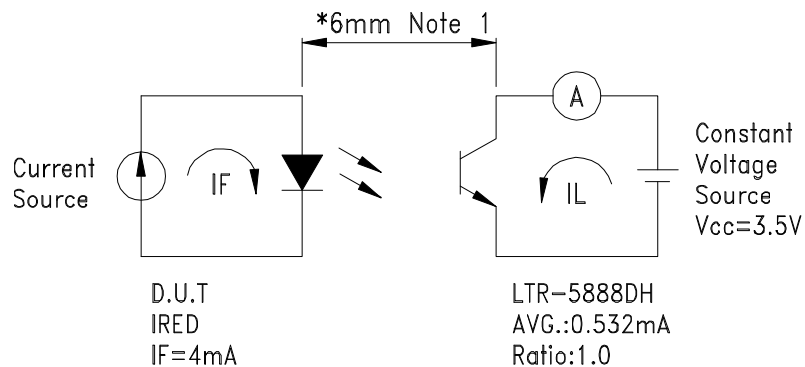

NOTE: 1. Lead frame to Lead frame

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTICS CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

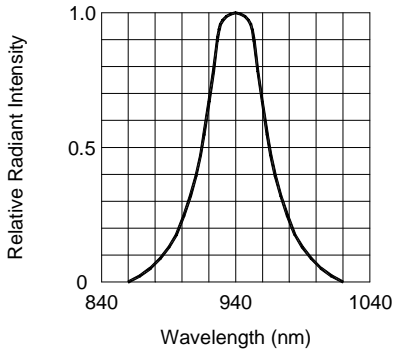


FIG.1 SPECTRAL DISTRIBUTION

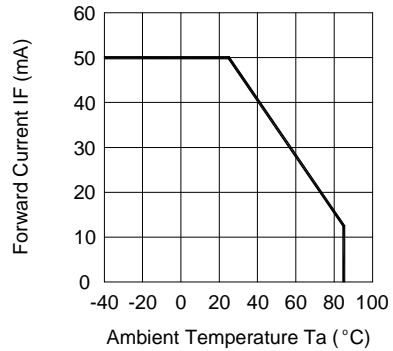


FIG.2 FORWARD CURRENT VS. AMBIENT TEMPERATURE

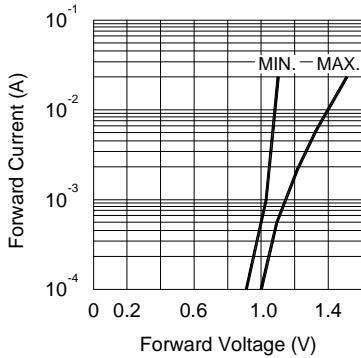


FIG.3 FORWARD CURRENT VS. FORWARD VOLTAGE

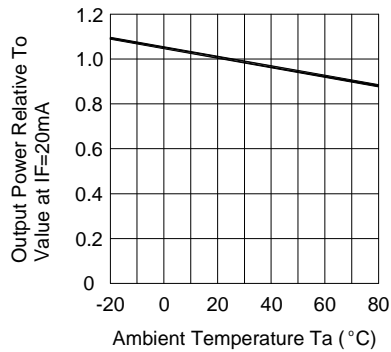


FIG.4 RELATIVE RADIANT INTENSITY VS. AMBIENT TEMPERATURE

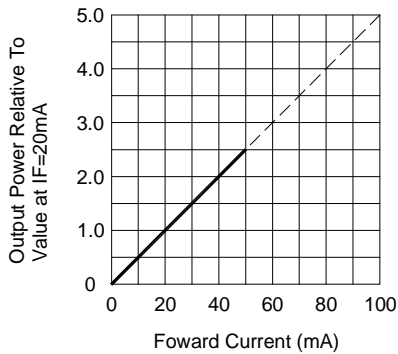


FIG.5 RELATIVE RADIANT INTENSITY VS. FORWARD CURRENT

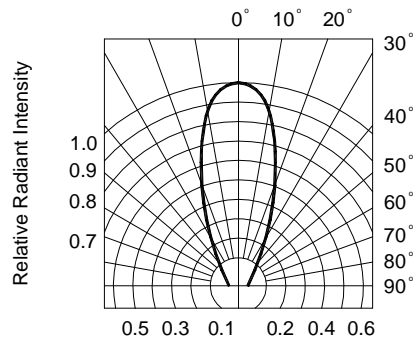


FIG.6 RADIATION DIAGRAM