

MOTOROLA SEMICONDUCTOR TECHNICAL DATA

Order this data sheet
by CA4800C/D


The RF Line Wideband Linear Amplifiers

... designed for amplifier applications in 50 ohm systems requiring wide bandwidth, low noise and low-distortion. This hybrid provides excellent gain stability with temperature and linear amplification as a result of the push-pull circuit design.


- Specified Characteristics at $V_{CC} = 24$ V, $T_C = 25^\circ\text{C}$:
 - Frequency Range — 10 to 1000 MHz
 - Output Power — 400 mW Typ @ 1 dB Compression, $f = 1$ GHz
 - Power Gain — 17 dB Typ @ $f = 50$ MHz
 - PEP — 320 mW Typ @ -32 dB IMD
 - Noise Figure — 6.5 dB Typ @ $f = 500$ MHz
 - ITO — 38 dBm Typ @ 752 MHz
- All Gold Metallization for Improved Reliability
- CA4812C is Optimized for 12 V Operation
- CA4815C is Optimized for 15 V Operation
- Thin Flange Version Available (Case 714T-01) by Adding Suffix "S" to Part Number

CA4800C,S
CA4812C,S
CA4815C,S

17 dB
10–1000 MHz
400 mW
WIDEBAND
LINEAR AMPLIFIERS



CASE 714P-01
CA4800C, CA4812C, CA4815C



CASE 714T-01
CA4800CS, CA4812CS,
CA4815CS


MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Supply Voltage	V_{CC}	28 18 14	V
RF Input Power	P_{in}	+14	dBm
Storage Temperature	T_{stg}	-55 to +125	$^\circ\text{C}$
Operating Case Temperature Range	T_C	-40 to +100	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$, $V_{CC} = 24$ V, 50 Ohm System)


Characteristic	Symbol	Min	Typ	Max	Unit
Supply Current	I_{DC}	200 360	220 380	240 400	mA
Power Gain ($f = 50$ MHz)	PG	16	17	18	dB
Bandwidth	BW	10	—	1000	MHz
Gain Flatness ($f = 10 - 1200$ MHz)	FL	—	± 0.5	± 1	dB
Power Output — 1 dB Compression ($f = 1000$ MHz)	$P_{O\ 1dB}$	300	400	—	mW
Input/Output VSWR $f = 50 - 900$ MHz $f = 10 - 1200$ MHz	VSWR	— —	— —	2:1 2.5:1	—
Noise Figure, Broadband $f = 500$ MHz $f = 1200$ MHz	NF	— —	6.5 7.5	8 9	dB
Third Order Intercept ($f_1 = 47$ MHz, $f_2 = 658$ MHz, See Figure 1)	ITO	37	38	—	dBm
Second Harmonic Distortion ($P_O = 100$ mW, $f_{2H} = 1000$ MHz)	dso	—	-50	-40	dB
Second Order Intermodulation Distortion ($P_O = 2.75$ dBm, $f_1 = 373$ MHz, $f_2 = 450$ MHz, See Figure 1)	IM2	—	—	-60	dB
Peak Envelope Power ($f = 850$ MHz, See Figure 2)	PEP	—	320	—	mW
Intermodulation Distortion, 3 Tone ($f = 860$ MHz, $P_{sync} = 200$ mW, See Figure 3)	IM3	—	-60	—	dB



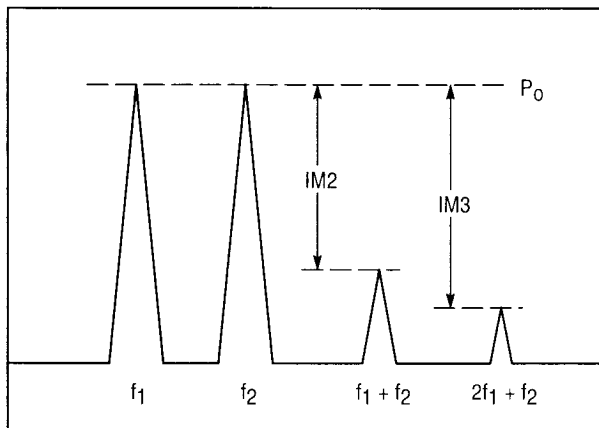


$$ITO = P_0 + IM3 / 2 \text{ @ } IM3 > 60 \text{ dB}$$

Figure 1. 2-Tone Intermodulation Test A

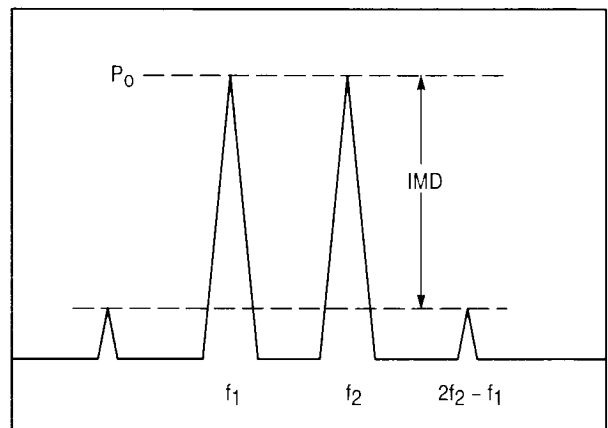


$$PEP = 4 \times P_0 \text{ @ } IMD = -32 \text{ dB}$$

Figure 2. 2-Tone Intermodulation Test B

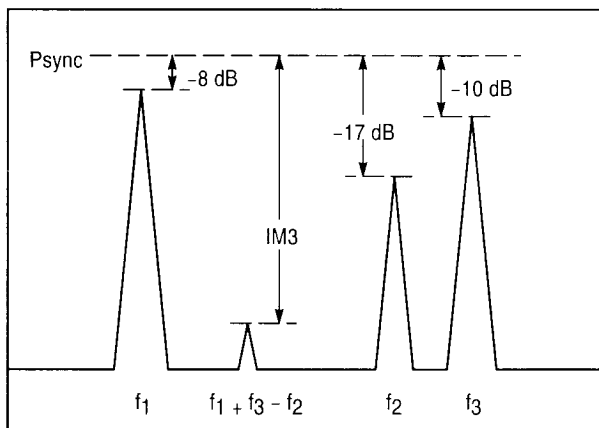

f_1 = Video
 f_2 = Sideband
 f_3 = Sound

Figure 3. 3-Tone TV Intermodulation Test

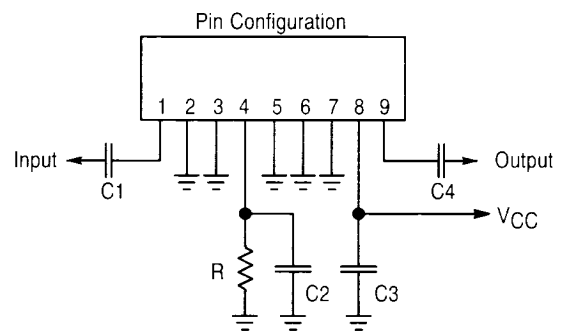

$C1,2,3,4 = 0.1 \text{ mF (chip)}$
 $R = 200 \text{ Ohms, 1 Watt}$

Figure 4. External Connections

CA4800C (Case 714P-01, Style 2)
CA4800CS (Case 714T-01, Style 1)


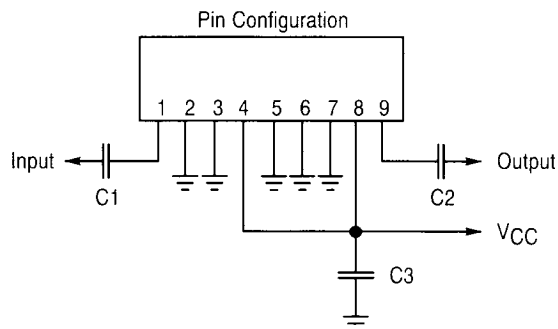


Figure 5. External Connections

CA4812C, CA4815C (Case 714P-01, Style 3)
CA4812CS, CA4815CS (Case 714T-01, Style 2)

Motorola reserves the right to make changes without further notice to any products herein to improve reliability, function or design. Motorola does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

OUTLINE DIMENSIONS

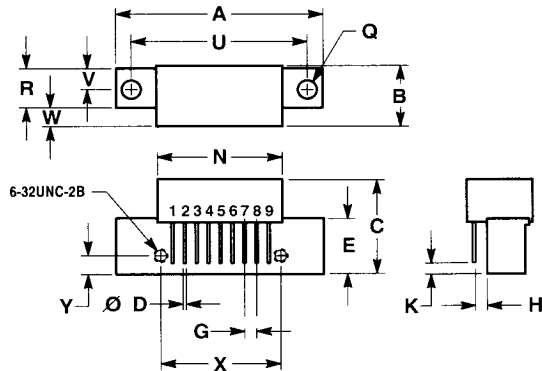


STYLE 2:
PIN 1: RF INPUT
2: GROUND
3: GROUND
4: RESISTOR-GROUND
5: GROUND
6: GROUND
7: GROUND
8: V_{CC} 1
9: RF OUTPUT

STYLE 3:
PIN 1: RF INPUT
2: GROUND
3: GROUND
4: V_{CC} 1
5: GROUND
6: GROUND
7: GROUND
8: V_{CC} 2
9: RF OUTPUT

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	44.33	44.57	1.745	1.755
B	—	14.85	—	0.585
C	—	22.09	—	0.870
D	0.49	0.55	0.019	0.022
E	12.45	12.95	0.490	0.510
G	2.42	2.66	0.095	0.105
H	2.42	2.66	0.095	0.105
K	1.78	2.79	0.070	0.110
N	26.80	27.55	1.055	1.085
Q	3.76	5.33	0.148	0.210
R	7.75	8.25	0.305	0.325
U	37.85	38.35	1.490	1.510
V	3.87	4.14	0.152	0.163
W	4.20	4.44	0.165	0.175
X	25.15	25.65	0.990	1.010
Y	4.07	4.31	0.160	0.170

CASE 714P-01

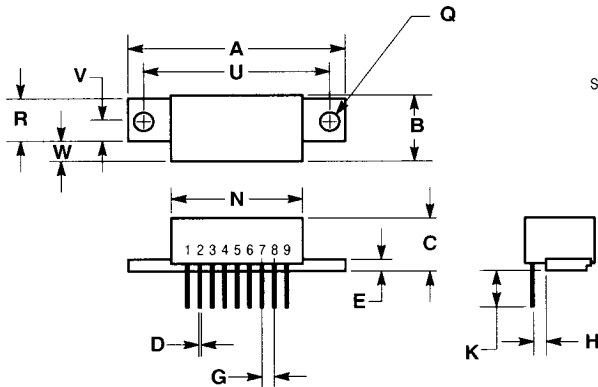

STYLE 1:
PIN 1: RF INPUT
2: GROUND
3: GROUND
4: RESISTOR-GROUND
5: GROUND
6: GROUND
7: GROUND
8: V_{CC} 1
9: RF OUTPUT

STYLE 2:
PIN 1: RF INPUT
2: GROUND
3: GROUND
4: V_{CC} 1
5: GROUND
6: GROUND
7: GROUND
8: V_{CC} 2
9: RF OUTPUT

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	44.33	44.57	1.745	1.755
B	13.97	14.27	0.550	0.570
C	10.93	11.93	0.430	0.470
D	0.44	0.50	0.017	0.020
E	3.05	3.30	0.105	0.130
G	2.42	2.66	0.095	0.105
H	2.42	2.66	0.095	0.105
K	6.48	7.74	0.255	0.305
N	26.67	27.17	1.050	1.060
Q	3.81	4.06	0.150	0.160
R	7.88	8.12	0.310	0.320
U	37.85	38.35	1.490	1.510
V	3.94	4.06	0.155	0.160
W	4.07	4.57	0.160	0.180

CASE 714T-01

Literature Distribution Centers:

USA: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036.

EUROPE: Motorola Ltd.; European Literature Center; 88 Tanners Drive, Blakelands, Milton Keynes, MK14 5BP, England.

JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141 Japan.

ASIA-PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.

025487 ✓



MOTOROLA

310960 PRINTED IN USA 9/91 IMPERIAL LITHO 81541 7,000 SS RF 28ACAA

CA4800C • CA4812C • CA4815C