

DATA SHEET

BAV16W

SURFACE MOUNT SWITCHING DIODES

VOLTAGE	100 Volts	POWER	350 mWatts
----------------	------------------	--------------	-------------------


SOD-123 Unit: inch (mm)

FEATURES

- Fast switching Speed.
- Electrically Identical to Standard JEDEC
- High Conductance
- Surface Mount Package Ideally Suited for Automatic Insertion.
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: SOD-123 plastic case.
- Terminals : Solderable per MIL-STD-750, Method 2026
- Standard packaging: 8mm tape
- Weight: approximately 0.0104 g
- Marking: A6

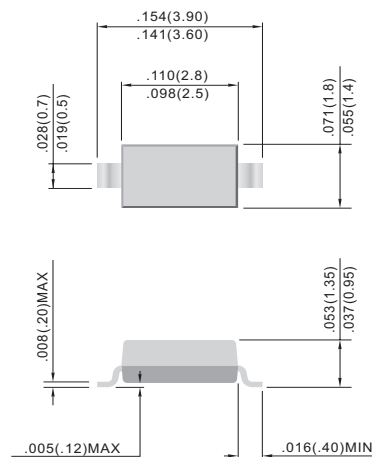

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T_J=25°C unless otherwise noted)

PARAMETER	SYMBOL	BAV16W	UNITS
Reverse Voltage	V _R	75	V
Peak Reverse Voltage	V _{RM}	100	V
RMS Voltage	V _{RMS}	50	V
Maximum DC Blocking Voltage	V _{DC}	75	V
Maximum Average Forward Current at T _a =25°C	I _F	150	mA
Peak Forward Surge Current, 1.0us	I _{FSM}	4.0	A
Power Dissipation Derate Above 25°C	P _{TOT}	350	mW
Maximum Forward Voltage	V _F	0.855 / 0.01A	V
Maximum DC Reverse Current at Rated DC Blocking Voltage T _J = 25°C	I _R	1.0@ 75V	uA
Junction Capacitance (Notes1)	C _J	2.0	pF
Maximum Reverse Recovery (Notes2)	T _{RR}	6.0	ns
Typical Thermal Resistance	RθJA	450	°C /W
Storage Temperature Range	T _J	-55 to +150	°C

NOTE:

1. C_J at V_R=0, f=1MHZ
2. From I_F=10mA to I_R=1mA, V_R=6Volts, R_L=100Ω

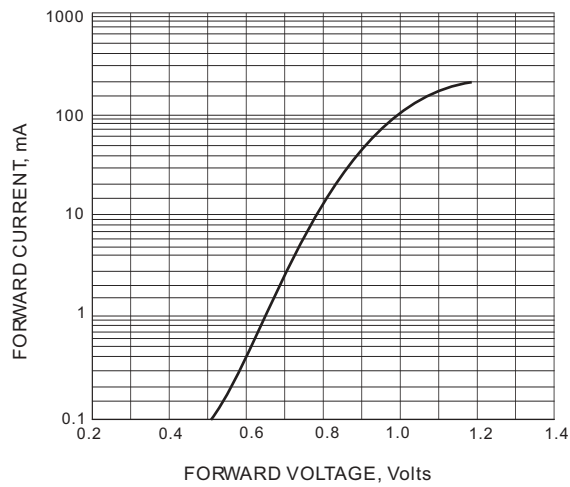


FIG. 1-TYPICAL FORWARD CHARACTERISTIC

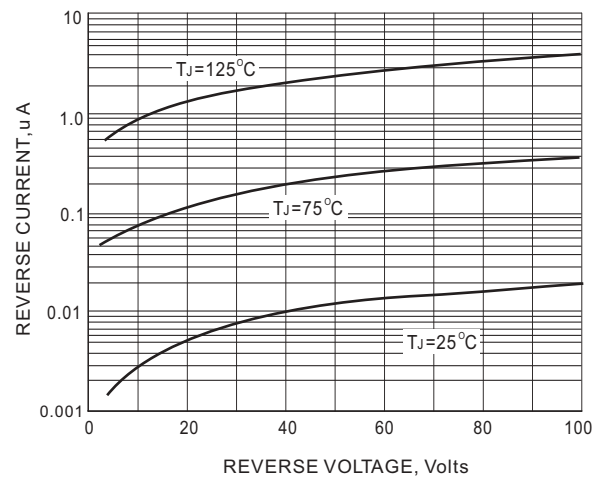


FIG. 2-TYPICAL REVERSE CHARACTERISTICS


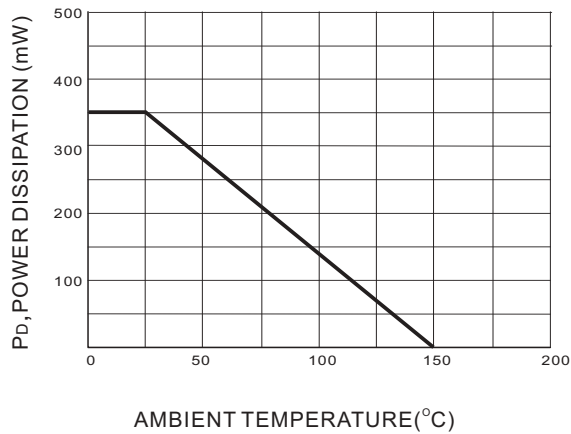


FIG. 3 POWER DERATING CURVE

MOUNTING PAD LAYOUT

SOD-123

Unit: inch (mm)

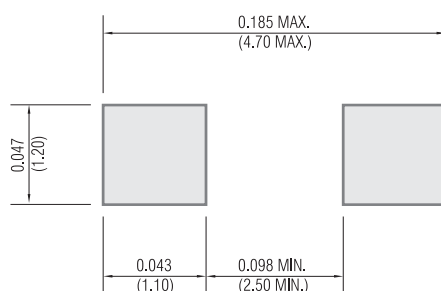

ORDER INFORMATION

- Packing information

T/R - 10K per 13" plastic Reel

T/R - 3K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2009

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.