


ISDN INTERFACE TRANSFORMER FOR EP TYPE

ELECTRICAL SPECIFICATIONS:

- * MEET THE CCITT 1.430 ISDN S-INTERFACE SPECIFICATIONS.
- * LOW LEAKAGE INDUCTANCE.
- * 60 dB MIN LONGITUDINAL BALANCE 10 KHz – 100 KHz
- * DIELECTRIC STRENGTH : 1500 VRMS (PRI-SEC).

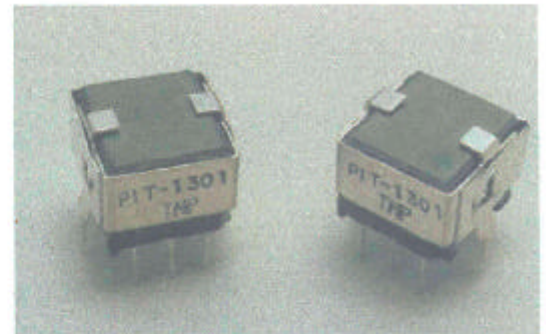

MODEL NO	PRI INDUCTANCE (10 KHz)	LEAKAGE INDUCTANCE (10 KHz)	INTERWINDING CAPACITANCE (10 KHz)	DC RESISTANCE (25 DEGREE C) OHM MAX		TURNS RATIO +/-2% PRI:SEC
				PRI	SEC	
PIT – 1301	20 mH MIN	13uH MAX	50PF MAX	1.1	2.6	1CT:2CT
PIT – 1302		15uH MAX	50PF MAX	1.1	1.3	1CT:1CT
PIT – 1303		13uH MAX	50PF MAX	1.1	4.2	1CT:2.5CT
PIT – 1304		13uH MAX	50PF MAX	1.1	2.6	1CT:1.8CT

PHYSICAL DIMENSIONS:

(UNIT:mm)

