


3.0V to 3.6V 512K × 8 Intelliwatt™ low-power CMOS SRAM with one chip enable

Features

- AS6WA5128
- Intelliwatt™ active power circuitry
- Industrial and commercial temperature ranges available
- Organization: 524,288 words × 8 bits
- 3.0V to 3.6V at 55 ns
- Low power consumption: ACTIVE
 - 144 mW at 3.6V and 55 ns
- Low power consumption: STANDBY
 - 72 μ W max at 3.6V
- 1.2V data retention
- Equal access and cycle times
- Easy memory expansion with \overline{CS} , \overline{OE} inputs
- Smallest footprint packages
 - 36(48)-ball FBGA
 - 32-pin TSOP I (available September 2000)
 - 32-pin sTSOP I (available September 2000)
 - 32-pin TSOP II (forward) (available September 2000)
 - 32-pin TSOP II (reverse) (available September 2000)
- ESD protection ≥ 2000 volts
- Latch-up current ≥ 200 mA


Logic block diagram

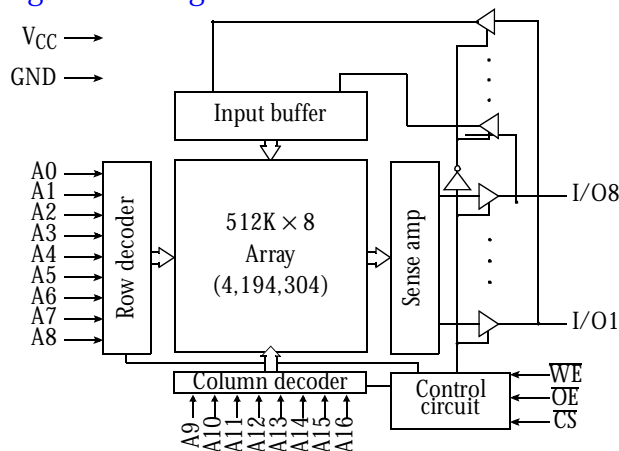

36(48)-CSP BGA Package (shading indicates no ball)

	1	2	3	4	5	6
A	A ₀	A ₁	NC	A ₃	A ₆	A ₈
B	I/O ₅	A ₂	WE	A ₄	A ₇	I/O ₁
C	I/O ₆		NC	A ₅		I/O ₂
D	V _{SS}					V _{CC}
E	V _{CC}					V _{SS}
F	I/O ₇		A ₁₈	A ₁₇		I/O ₃
G	I/O ₈	OE	CS	A ₁₆	A ₁₅	I/O ₄
H	A ₉	A ₁₀	A ₁₁	A ₁₂	A ₁₃	A ₁₄

Pin arrangement

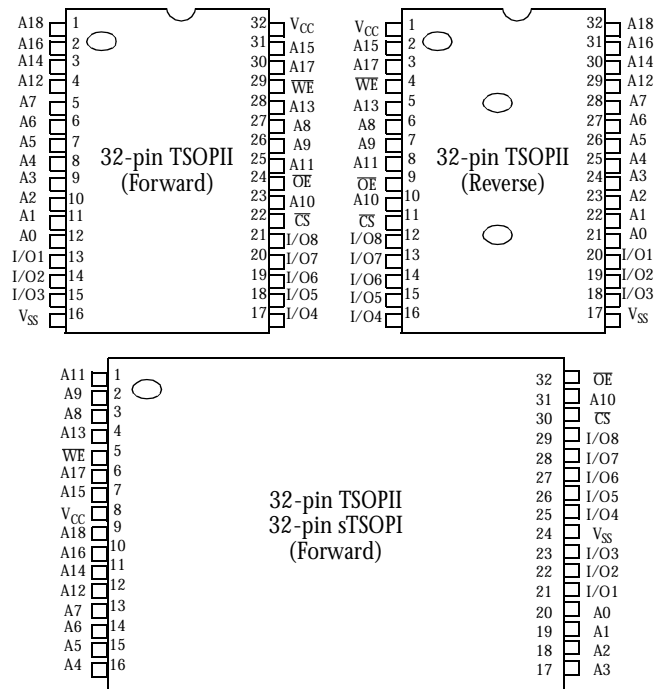

Selection guide

Product	V _{CC} Range			Speed (ns)	Power Dissipation	
	Min (V)	Typ ² (V)	Max (V)		Operating (I _{CC1})	Standby (I _{SB2})
					Max (mA)	Max (μA)
AS6WA5128	3.0	3.3	3.6	55	2	20



Functional description

The AS6WA5128 is a low-power CMOS 4,194,304-bit Static Random Access Memory (SRAM) device organized as 524,288 words \times 8 bits. It is designed for memory applications where slow data access, low power, and simple interfacing are desired.

Equal address access and cycle times (t_{AA} , t_{RC} , t_{WC}) of 55 ns are ideal for low-power applications. Active high and low chip selects (\overline{CS}) permit easy memory expansion with multiple-bank memory systems.

When \overline{CS} is high, the device enters standby mode: the AS6WA5128 is guaranteed not to exceed 72 μ W power consumption at 3.6V and 55ns. The device also returns data when V_{CC} is reduced to 1.5V for even lower power consumption.

A write cycle is accomplished by asserting write enable (\overline{WE}) and chip select (\overline{CS}) low. Data on the input pins I/O1–I/O8 is written on the rising edge of \overline{WE} (write cycle 1) or \overline{CS} (write cycle 2). To avoid bus contention, external devices should drive I/O pins only after outputs have been disabled with output enable (\overline{OE}) or write enable (\overline{WE}).

A read cycle is accomplished by asserting output enable (\overline{OE}), chip select (\overline{CS}), with write enable (\overline{WE}) High. The chip drives I/O pins with the data word referenced by the input address. When either chip select or output enable is inactive, or write enable is active, output drivers stay in high-impedance mode.

All chip inputs and outputs are CMOS-compatible, and operation is from a single 3.0 to 3.6V supply. The device is available in the JEDEC standard 32-pin TSOP I, 32-pin sTSOP I, 400-mL TSOP II, and 36(48)-ball FBGA packages.

Absolute maximum ratings

Parameter	Device	Symbol	Min	Max	Unit
Voltage on V_{CC} relative to V_{SS}		V_{IN}	–0.5	$V_{CC} + 0.5$	V
Voltage on any I/O pin relative to GND		$V_{I/O}$	–0.5		V
Power dissipation		P_D	–	1.0	W
Storage temperature (plastic)		T_{stg}	–65	+150	°C
Temperature with V_{CC} applied		T_{bias}	–55	+125	°C
DC output current (low)		I_{OUT}	–	20	mA

Note: Stresses greater than those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions outside those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Truth table

\overline{CS}	\overline{WE}	\overline{OE}	Supply Current	I/O1–I/O8	Mode
H	X	X	I_{SB}	High Z	Standby (I_{SB})
L	X	X	I_{SB}	High Z	Standby (I_{SB})
L	H	H	I_{CC}	High Z	Output disable (I_{CC})
L	H	L	I_{CC}	D_{OUT}	Read (I_{CC})
L	L	X	I_{CC}	D_{IN}	Write (I_{CC})

Key: X = Don't care, L = Low, H = High.



Recommended operating condition (over the operating range)

Parameter	Description	Test Conditions		Min	Max	Unit
V_{OH}	Output HIGH Voltage	$I_{OH} = -2.1\text{mA}$	$V_{CC} = 3.0\text{V}$	2.4		V
V_{OL}	Output LOW Voltage	$I_{OL} = 2.1\text{mA}$	$V_{CC} = 3.0\text{V}$		0.4	V
V_{IH}	Input HIGH Voltage		$V_{CC} = 3.0\text{V}$	2.2	$V_{CC} + 0.5$	V
V_{IL}	Input LOW Voltage		$V_{CC} = 3.0\text{V}$	-0.5	0.8	V
I_{IX}	Input Load Current	$\text{GND} \leq V_{IN} \leq V_{CC}$		-1	+1	μA
I_{OZ}	Output Load Current	$\text{GND} \leq V_O \leq V_{CC}$; Outputs High Z		-1	+1	μA
I_{CC}	V_{CC} Operating Supply Current	$\overline{CS} = V_{IL}$, $I_{OUT} = 0\text{mA}$, $f = 0$, $V_{IN} = V_{IL}$ or V_{IH}	$V_{CC} = 3.6\text{V}$		2	mA
I_{CC1} @ 1 MHz	Average V_{CC} Operating Supply Current at 1 MHz	$\overline{CS} \leq 0.2\text{V}$, $V_{IN} \leq 0.2\text{V}$, or $V_{IN} \geq V_{CC} - 0.2\text{V}$, $f = 1\text{ mS}$	$V_{CC} = 3.6\text{V}$		2	mA
I_{CC2}	Average V_{CC} Operating Supply Current	$\overline{CS} \neq V_{IL}$, $V_{IN} = V_{IL}$ or V_{IH} , $f = f_{Max}$	$V_{CC} = 3.6\text{V}$ (55 ns)		40	mA
I_{SB}	\overline{CS} Power Down Current; TTL Inputs	$\overline{CS} \geq V_{IH}$, other inputs = $0\text{V} - V_{CC}$	$V_{CC} = 3.6\text{V}$		100	μA
I_{SB1}	\overline{CS} Power Down Current; CMOS Inputs	$\overline{CS} \geq V_{CC} - 0.2\text{V}$, other inputs = $0\text{V} - V_{CC}$, $f = f_{Max}$	$V_{CC} = 3.6\text{V}$		20	μA
$I_{SBD R}$	Data Retention	$\overline{CS} \geq V_{CC} - 0.1\text{V}$, $f = 0$	$V_{CC} = 1.2\text{V}$		2	μA

Capacitance ($f = 1\text{ MHz}$, $T_a = \text{Room temperature}$, $V_{CC} = \text{NOMINAL}$)

Parameter	Symbol	Signals	Test conditions	Max	Unit
Input capacitance	C_{IN}	A, \overline{CS} , \overline{WE} , \overline{OE}	$V_{IN} = 0\text{V}$	5	pF
I/O capacitance	$C_{I/O}$	I/O	$V_{IN} = V_{OUT} = 0\text{V}$	7	pF




Read cycle (over the operating range)

Parameter	Symbol	Min	Max	Unit	Notes
Read cycle time	t_{RC}	55	–	ns	
Address access time	t_{AA}	–	55	ns	3
Chip select (\overline{CS}) access time	t_{ACS}	–	55	ns	3
Output enable (\overline{OE}) access time	t_{OE}	–	25	ns	
Output hold from address change	t_{OH}	10	–	ns	5
\overline{CS} low to output in low Z	t_{CLZ}	10	–	ns	4, 5
\overline{CS} high to output in high Z	t_{CHZ}	0	20	ns	4, 5
\overline{OE} low to output in low Z	t_{OLZ}	5	–	ns	4, 5
\overline{OE} high to output in high Z	t_{OHZ}	0	20	ns	4, 5
Power up time	t_{PU}	0	–	ns	4, 5
Power down time	t_{PD}	–	55	ns	4, 5

Shaded areas indicate preliminary information.



Key to switching waveforms

 Rising input

A timing diagram showing a signal that starts at a high level, remains constant for a short duration, then falls to a low level, and remains constant for a longer duration. The text "Falling input" is written to the right of the signal line.

 Undefined/don't care

Read waveform 1 (address controlled)

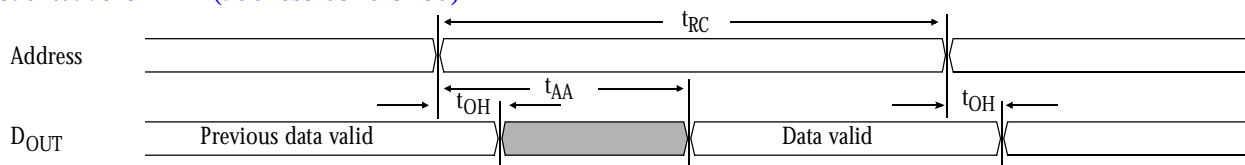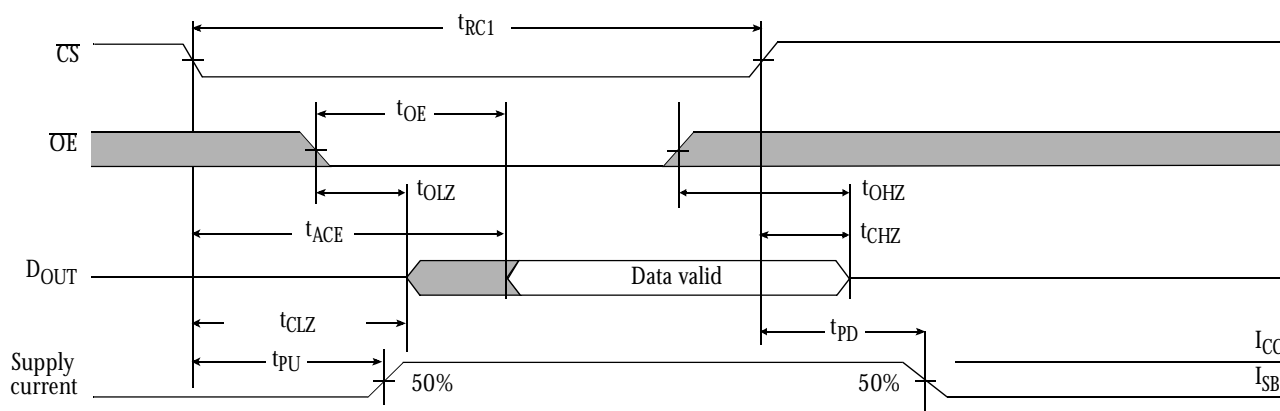Read waveform 2 ($\overline{\text{CS}}$, $\overline{\text{OE}}$ controlled)




Write cycle (over the operating range)


Parameter	Symbol	Min	Max	Unit	Notes
Write cycle time	t_{WC}	55	–	ns	
Chip select to write end	t_{CW}	40	–	ns	12
Address setup to write end	t_{AW}	40	–	ns	
Address setup time	t_{AS}	0	–	ns	12
Write pulse width	t_{WP}	35	–	ns	
Address hold from end of write	t_{AH}	0	–	ns	
Data valid to write end	t_{DW}	25	–	ns	
Data hold time	t_{DH}	0	–	ns	4, 5
Write enable to output in high Z	t_{WZ}	0	20	ns	4, 5
Output active from write end	t_{OW}	5	–	ns	4, 5

Shaded area indicate preliminary information.

Write waveform 1 (\overline{WE} controlled)

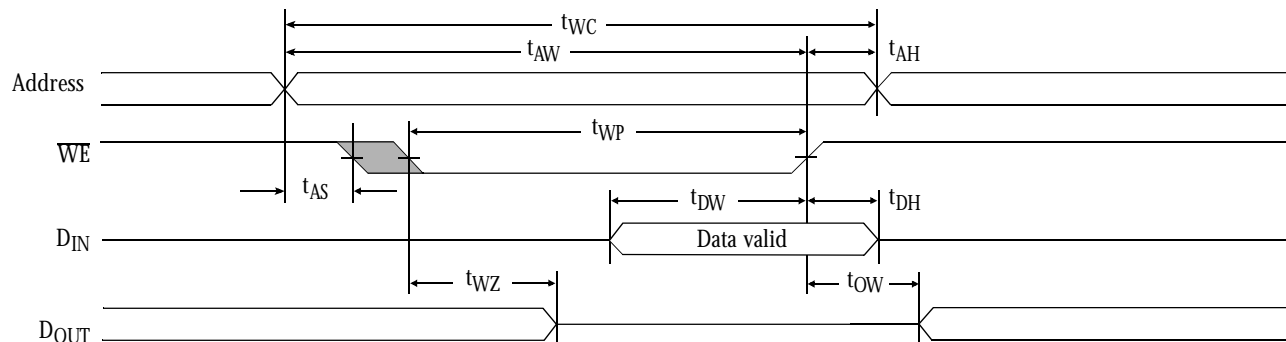

Write waveform 2 (\overline{CS} controlled)

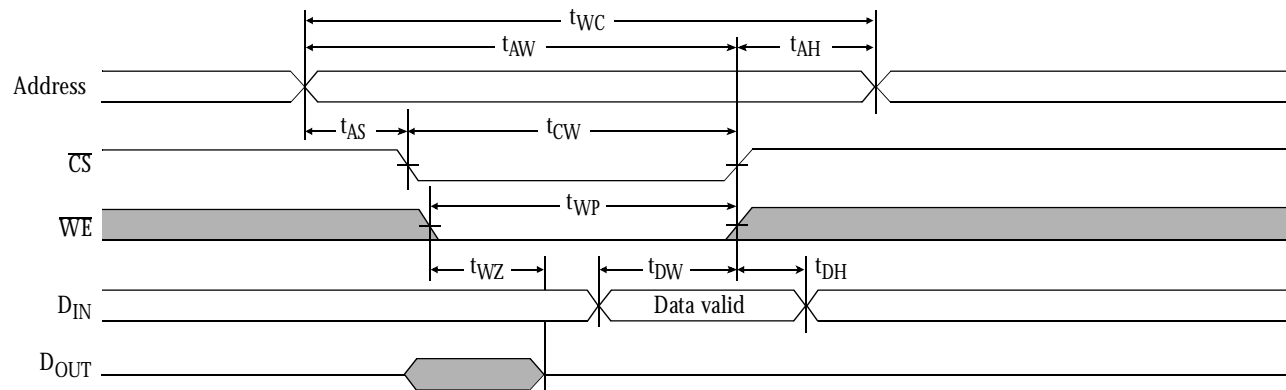







Data retention characteristics (over the operating range)

Parameter	Symbol	Test conditions	Min	Max	Unit
V_{CC} for data retention	V_{DR}	$V_{CC} = 1.2V$ $\overline{CS} \geq V_{CC} - 0.1V$ or $V_{IN} \geq V_{CC} - 0.1V$ or $V_{IN} \leq 0.1V$	1.2V	3.6	V
Data retention current	I_{CCDR}		–	2	mA
Chip deselect to data retention time	t_{CDR}		0	–	
Operation recovery time	t_R		t_{RC}	–	ns

Data retention waveform

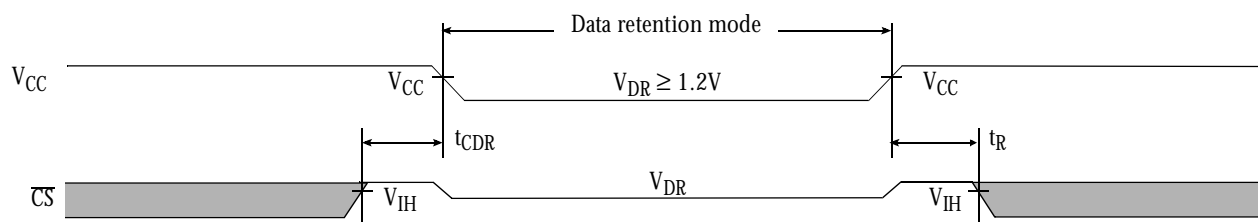

AC test loads and waveforms

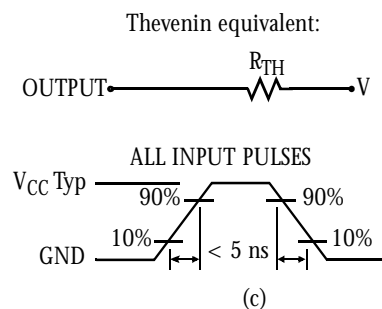






Parameters	$V_{CC} = 3.0V$	$V_{CC} = 2.5V$	$V_{CC} = 2.0V$	Unit
R1	1105	16670	15294	Ohms
R2	1550	15380	11300	Ohms
R_{TH}	645	8000	6500	Ohms
V_{TH}	1.75V	1.2V	0.85V	Volts

Notes


- During V_{CC} power-up, a pull-up resistor to V_{CC} on \overline{CS} is required to meet I_{SB} specification.
- This parameter is sampled, but not 100% tested.
- For test conditions, see AC Test Conditions.
- t_{CLZ} and t_{CHZ} are specified with $C_L = 5pF$ as in Figure C. Transition is measured ± 500 mV from steady-state voltage.
- This parameter is guaranteed, but not tested.
- \overline{WE} is HIGH for read cycle.
- \overline{CS} and \overline{OE} are LOW for read cycle.
- Address valid prior to or coincident with \overline{CS} transition LOW.
- All read cycle timings are referenced from the last valid address to the first transitioning address.
- \overline{CS} or \overline{WE} must be HIGH during address transitions. Either \overline{CS} or \overline{WE} asserting high terminates a write cycle.
- All write cycle timings are referenced from the last valid address to the first transitioning address.
- N/A.
- 1.2V data retention applies to commercial and industrial temperature range operations.
- $C = 30pF$, except at high Z and low Z parameters, where $C = 5pF$.



Typical DC and AC characteristics

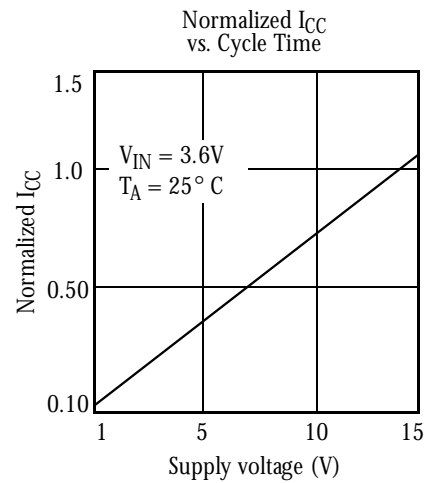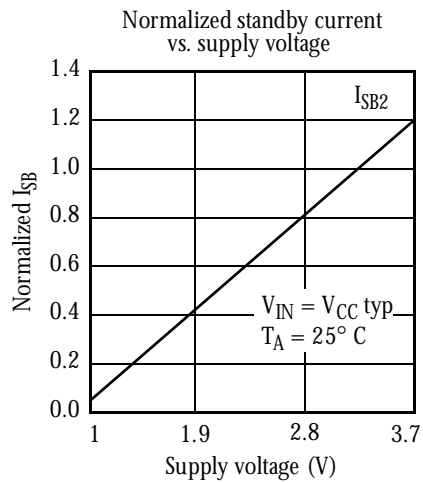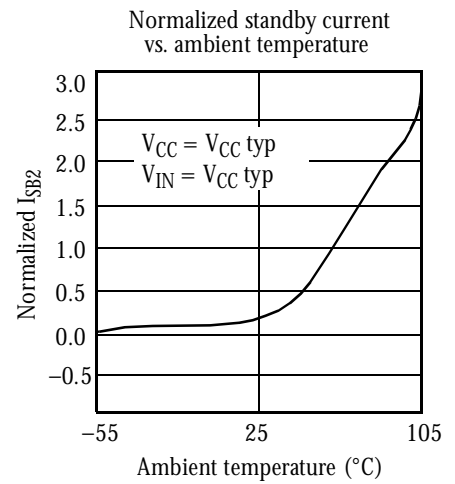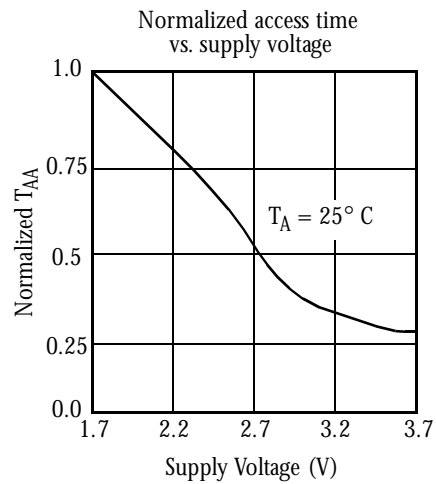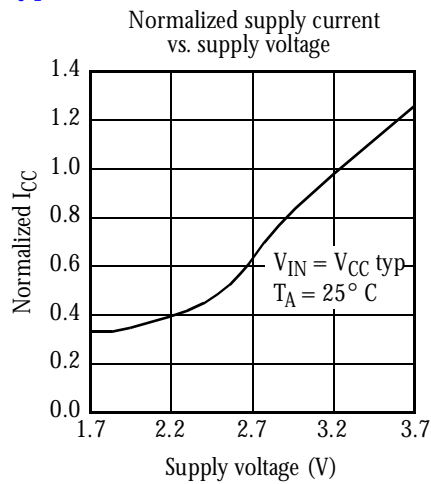


32-pin Thin Small Outline Package Type I (Forward) (T)

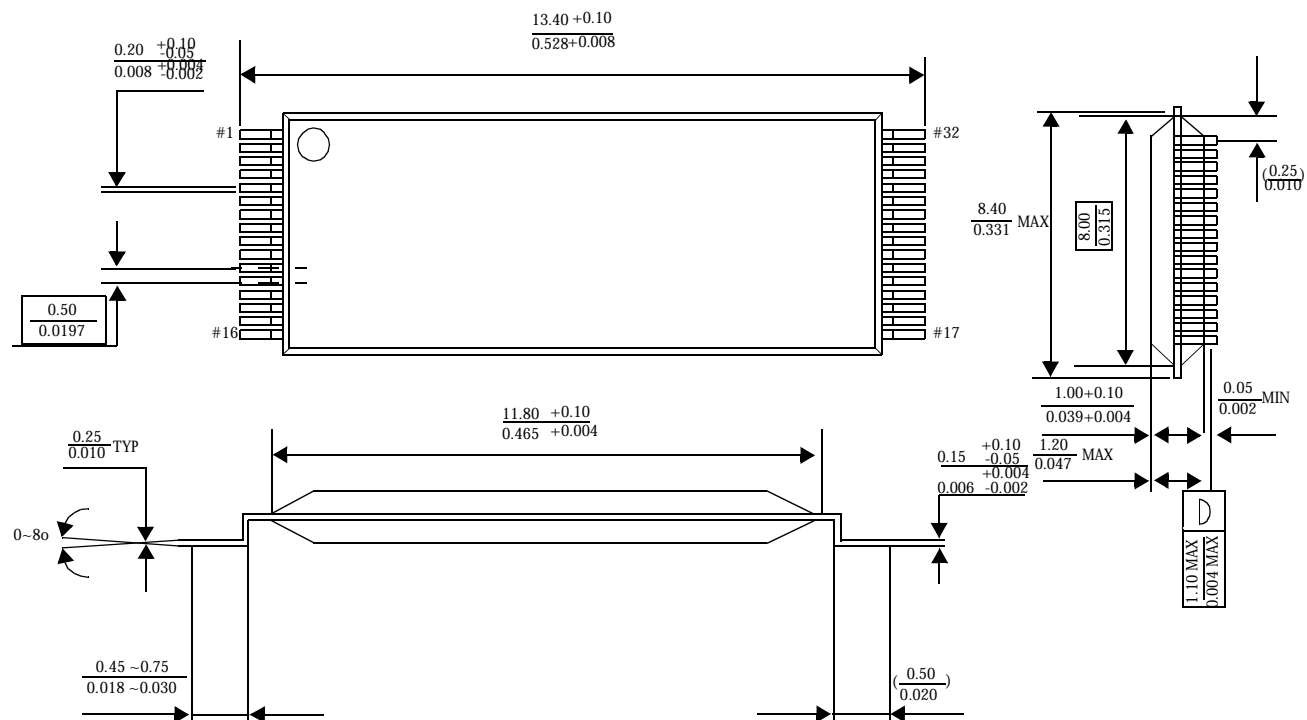




32-pin Thin Small Outline Package Type II (Forward) (HE)

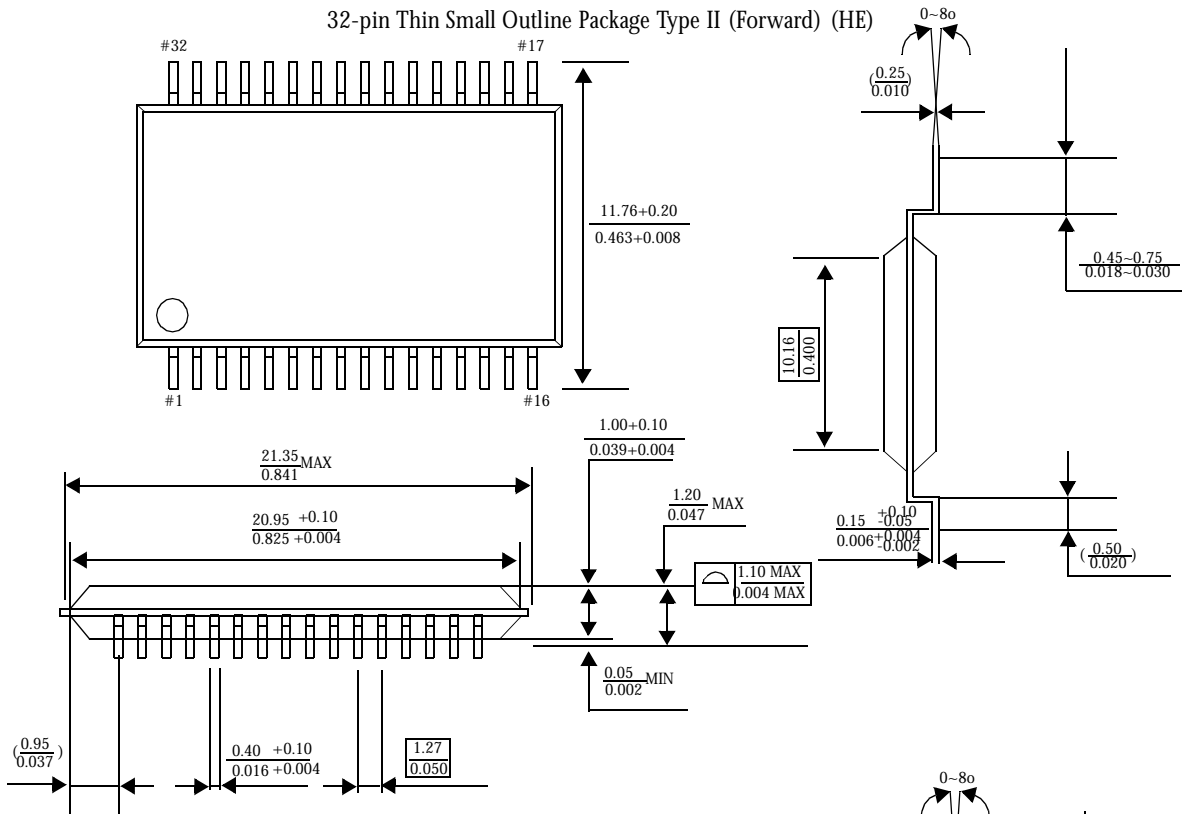


32-pin Thin Small Outline Package Type II (Reverse) (HR)

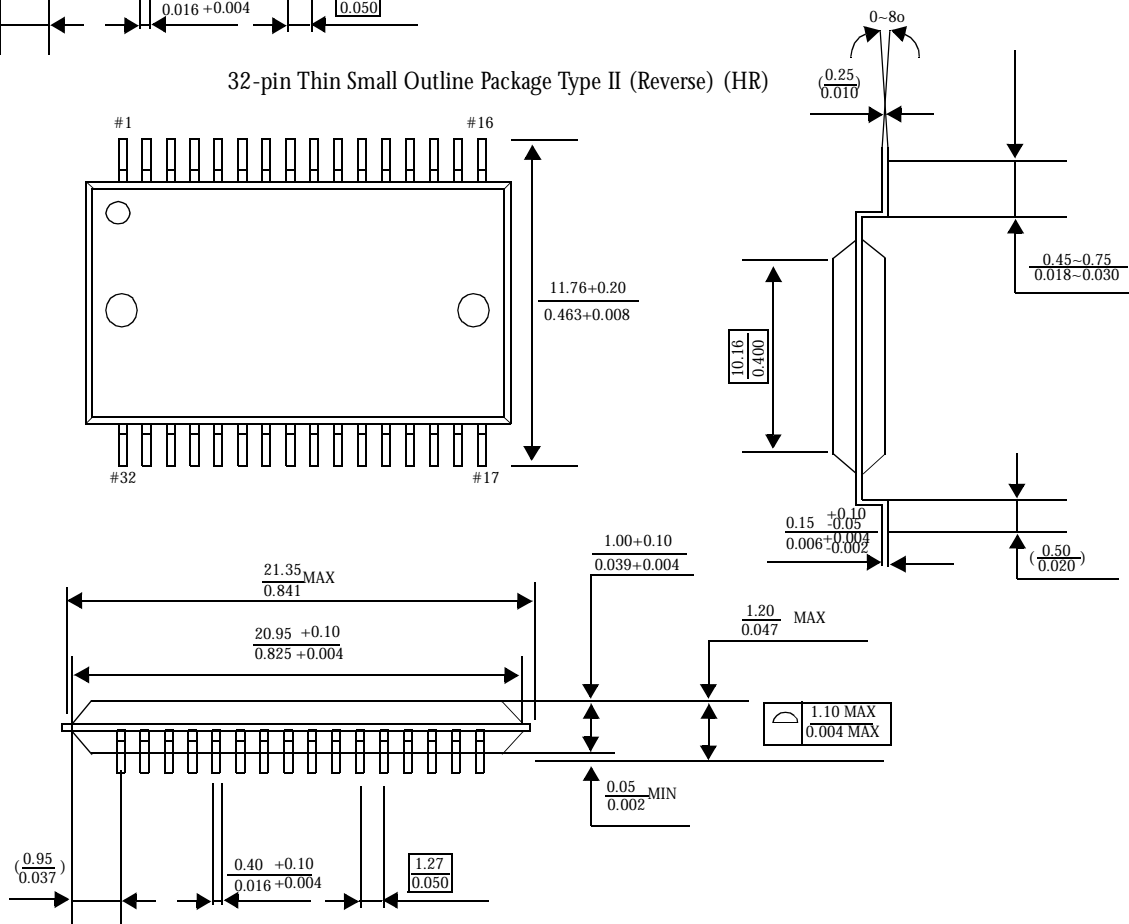



36(48)-ball FBGA

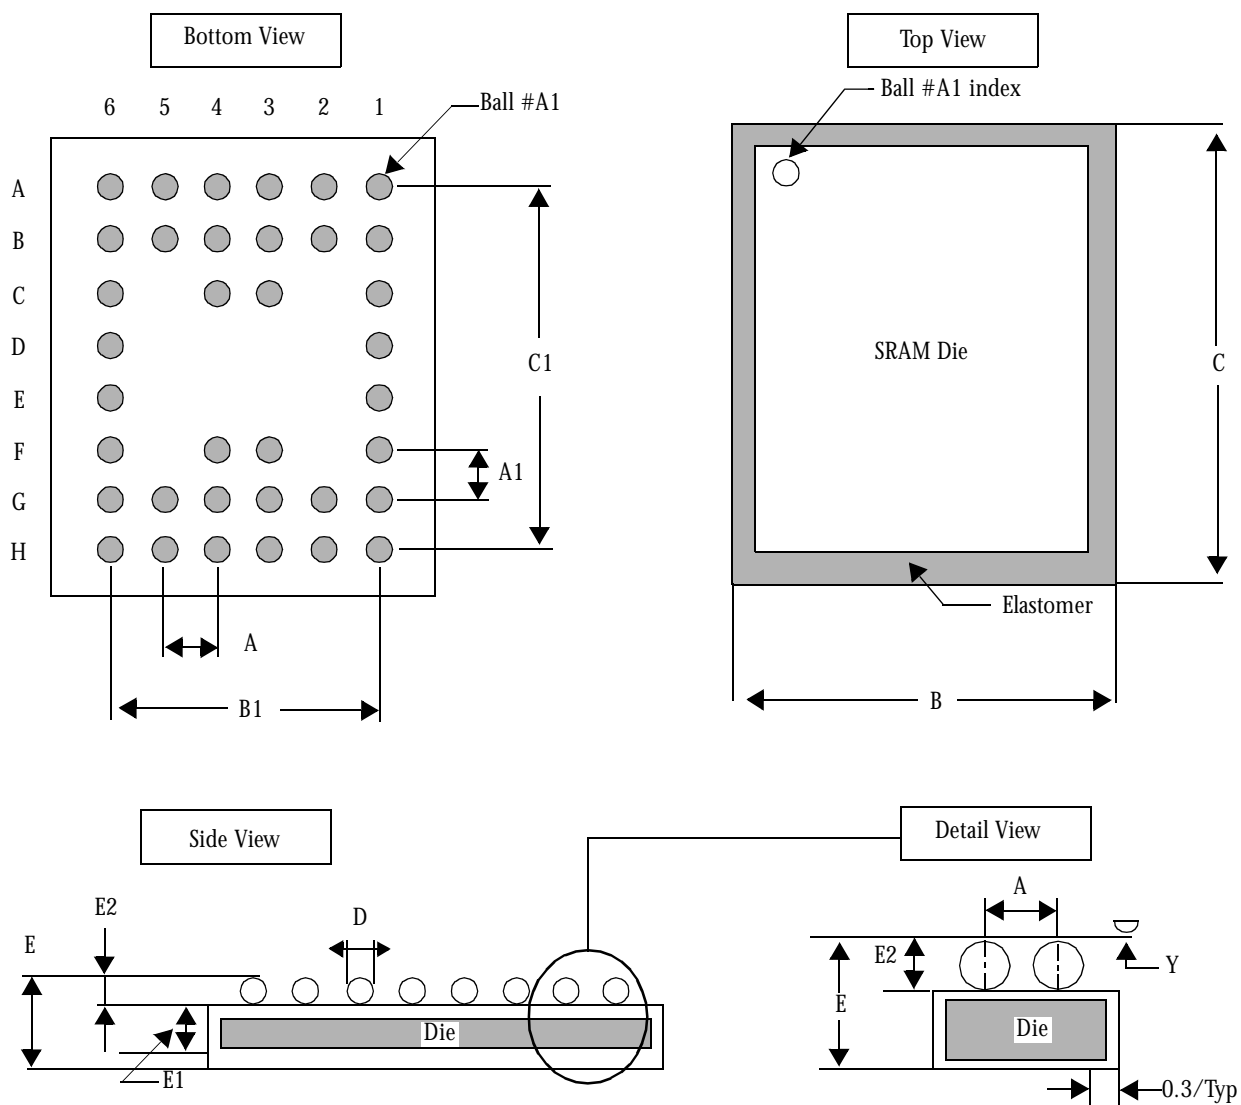

	Minimum	Typical	Maximum
A	–	0.75	–
B	6.90	7.00	7.10
B1	–	3.75	–
C	10.90	11.00	11.10
C1	–	5.25	–
D	0.30	0.35	0.40
E	–	–	1.20
E1	–	0.68	–
E2	0.22	0.25	0.27
Y	–	–	0.08

Notes

1. Bump counts: 36(48) (8 row × 6 column).
2. Pitch: (x,y) = 0.75 mm × 0.75 mm (typ).
3. Units: millimeters.
4. All tolerance are ±0.050 unless otherwise specified.
5. Typ: typical.
6. Y is coplanarity: 0.08 (max).



Ordering codes

Speed (ns)	Ordering Code	Package Type	Operating Range
55	AS6WA5128-TC	32-pin 8×20 TSOP I	Commercial
	AS6WA5128-STC	32-pin 8×13.4 TSOP I	
	AS6WA5128-HFC	32-pin TSOP II (forward)	
	AS6WA5128-HRC	32-pin TSOP II (reverse)	
	AS6WA5128-BC	48-ball fine pitch BGA	
55	AS6WA5128-TI	32-pin 8×20 TSOP I	Industrial
	AS6WA5128-STI	32-pin 8×13.4 TSOP I	
	AS6WA5128-HFI	32-pin TSOP II (forward)	
	AS6WA5128-HRI	32-pin TSOP II (reverse)	
	AS6WA5128-BI	48-ball fine pitch BGA	

Part numbering system

AS6WA	5128	T, ST, HF, HR, B	C, I
SRAM Intelliwatt™ prefix	Device number	Package: T: TSOP I ST: sTSOP I HF: TSOP2 Forward HR: TSOP2 Reverse B: CSP BGA	Temperature range: C: Commercial: 0° C to 70° C I: Industrial: -40° C to 85° C