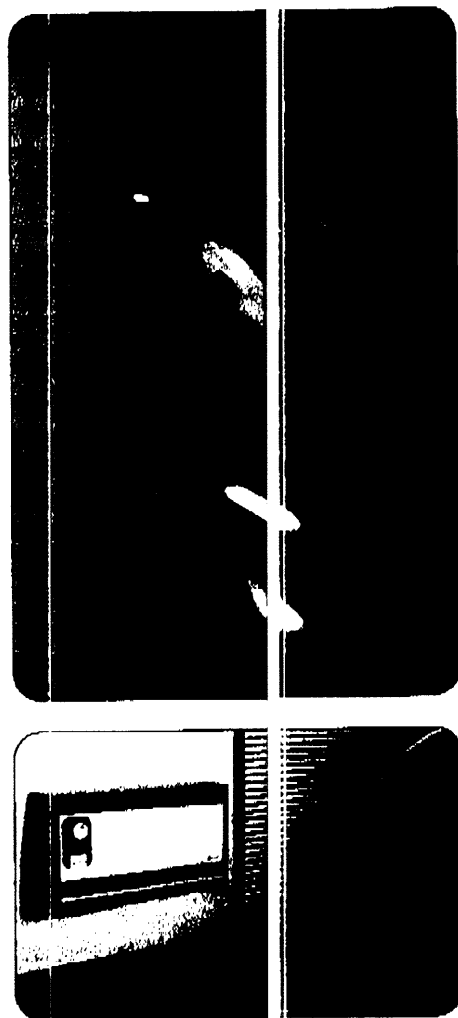


**WHP30**

**DCH3000A**



## Applications

### WHP30

- A wide range of applications including conservatories, shops, restaurants, offices and hospitals.

### DCH3000A

- A wide range of commercial and domestic applications including hallways, offices, pubs, restaurants, shops and hotel rooms.

## Features

### WHP30

- 3kW Fan Heater complete with thermostatic controller
- Compact 3kW fan heater for domestic and commercial applications.
- Attractive flame retardant polycarbonate/glass filled nylon plastic casing.
- Complete with thermostatic controller (HC301).
- Wall mounted with 150° swivel and 45° tilt directions adjustment.
- White with grey bracket.
- Open wound spiral element.
- Double insulated with two thermal cut outs.
- 1 year UK guarantee.

### DCH3000A

- 3kW Wall Mounted Fan Heater
- Versatile wall mounted fan heater.
- Choice of 3 heat settings (1kW, 2kW, 3kW) plus a cool air setting.
- Adjustable energy-saving temperature control regulates heat output.
- Safety cut out with mains reset.
- Simple installation and operation
- BEAB approved.
- 1 year guarantee (UK)

## Operation

### WHP30

- Operated by an HC301 thermostatic controller with on/off switch and fan only/fan heater switch. Fan indicating light.

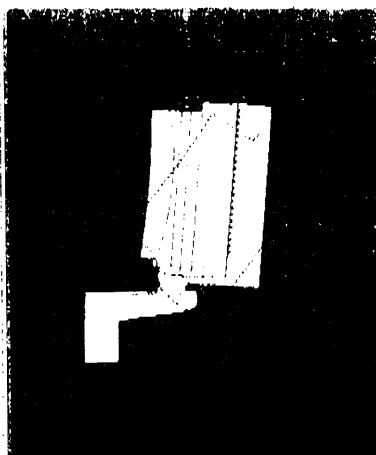
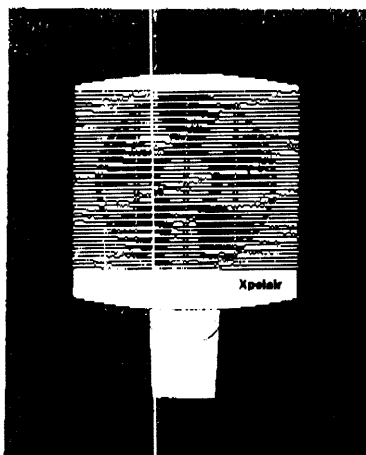
## Specification

Cat. Ref.	Air Movement		Temperature Rise Through Unit	Power (watts)
	l/s	m <sup>3</sup> /h		
WHP30	83	300	30°C	3000
DCH3000A	32	115	-	3000

- Ratings for single phase supplies 240V ~ 50Hz (3kW)

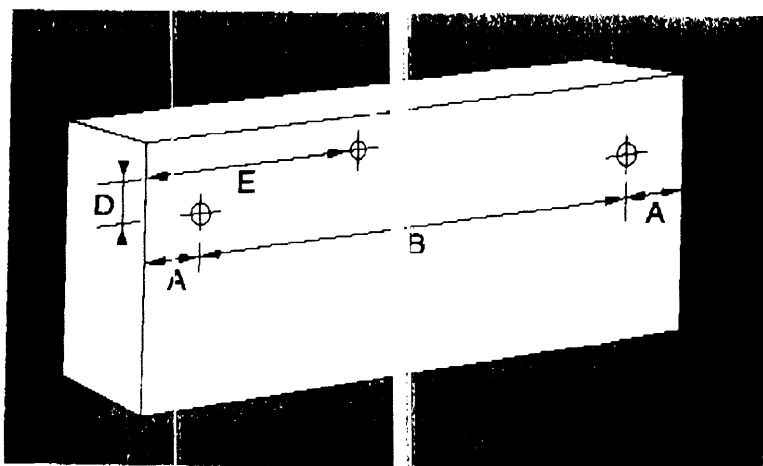
## Commercial Fan Heaters

## Dimensions

**WHP20**

<b>A</b>	370 (Max) 280 (Min)
<b>B</b>	175
<b>C</b>	247
<b>D</b>	370
<b>Weight (kg)</b>	2.413

All dimensions in mm.

**DCH3000A**

Dimensions (mm)	
<b>Height</b>	265
<b>Depth</b>	110
<b>Width</b>	505
<b>Weight (kg)</b>	4.5

**DCH3000A**

Fixing Centres (mm)	
<b>A</b>	52.5
<b>B</b>	385
<b>C</b>	75.7
<b>D</b>	40
<b>E</b>	197.5

## Installation

**WHP30**

- Fan heating is not recommended for rooms greater than 5 metres high.
- Heater should be sited at least 1.8m from floor level and a minimum of 150mm from the ceiling and 300mm from adjacent walls or other objects.

**DCH3000A**

- Heater should be mounted not less than 305mm (12") from the floor or 610mm (24") from a ceiling and nearby objects.
- The unit must be mounted on an unbroken surface which completely covers the back panel.