


# MS Series

Bare Metal Element Resistors



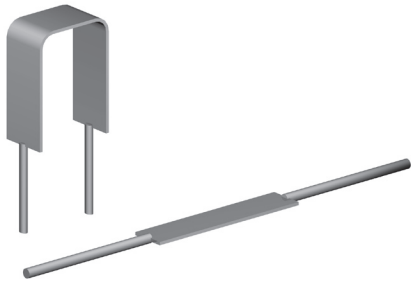


- Resistances from 0.005 to 0.10 Ohms
- Tolerance to  $\pm 1\%$
- Resistance Wire TCR:  $\pm 20$ ppm/K
- For Current Sensing and Shunt Applications
- All Welded Construction
- Low Inductance (  $< 10$ nH )
- Economical Bare Metal Element

## SPECIFICATIONS

Type	Power Rating Watts @ 85°C	Resistance Range ( $\Omega$ ) <sup>1</sup>	Tolerances	TCR ( ppm/K )	Dimensions	
					L +0.040 / -0.020" [+1.0 / -0.5mm]	D $\pm 0.002$ " [ $\pm 0.05$ mm]
MS-1	1	0.005 to 0.10	$\pm 1\%$ / $\pm 5\%$	See Chart	Consult Riedon	0.032 [0.8] 0.040 [1.0]
MS-3	3	0.005 to 0.10	$\pm 1\%$ / $\pm 5\%$	See Chart	Consult Riedon	0.040 [1.0]
MS-5	5	0.005 to 0.05	$\pm 1\%$ / $\pm 5\%$	See Chart	Consult Riedon	0.040 [1.0]

<sup>1</sup> Call Factory for Other Resistances

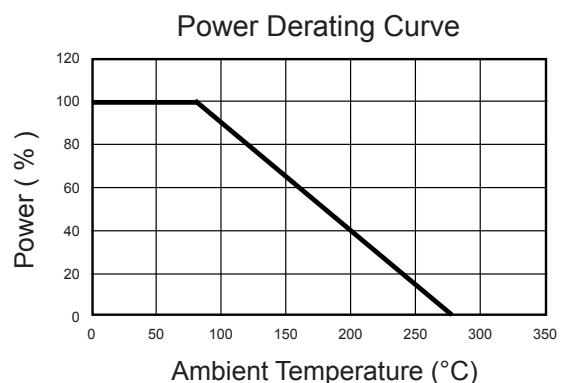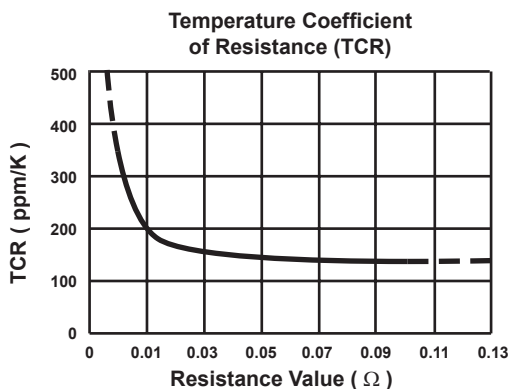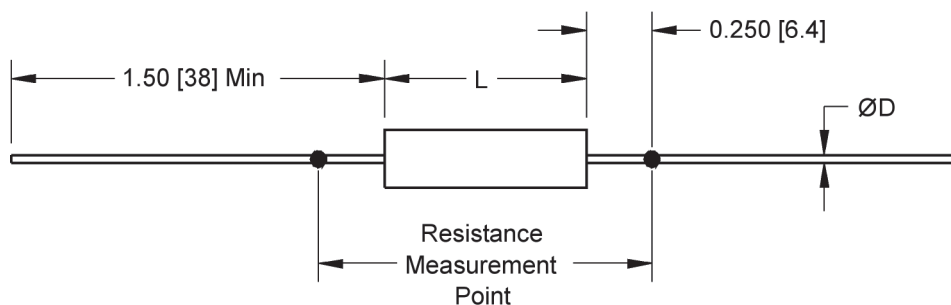

## Ordering Information

Part Number - Resistance - Tolerance - TCR ( If not standard )

Example: MS-3 0.05 Ohm 1%