



HIGH POWER OPERATIONAL AMPLIFIER

148/149

M.S.KENNEDY CORP.


4707 Dey Road Liverpool, N.Y. 13088

(315) 701-6751


FEATURES:

- Improved Replacement for OMA541SKB
- Low Cost
- High Voltage Operation: 150V
- Low Quiescent Current: 30mA Typ.
- High Output Current: 5A Min.
- No Second Breakdown
- High Speed: 27V/ μ S Typ.
- Monolithic MOS Technology
- External Compensation for Optimum Gain-Bandwidth

MIL-PRF-38534 QUALIFIED



MSK148




MSK149

DESCRIPTION:

The MSK 148 is a high power monolithic MOSFET operational amplifier ideally suited for high power amplification and magnetic deflection applications. With a total supply voltage rating of 150 volts and 5A of available output current, the MSK 148 is also an excellent low cost choice for motor drive circuits. The MOSFET output frees the MSK 148 from secondary breakdown limitations and power dissipation is kept to a minimum with a quiescent current rating of only 30mA. The MSK 148 is packaged in a hermetically sealed 8 pin power dip which has two external compensation pins. For applications requiring heat sinking, the MSK 149 is available with bolt down tabs and is otherwise identical to the MSK 148 (see mechanical specifications).

EQUIVALENT SCHEMATIC

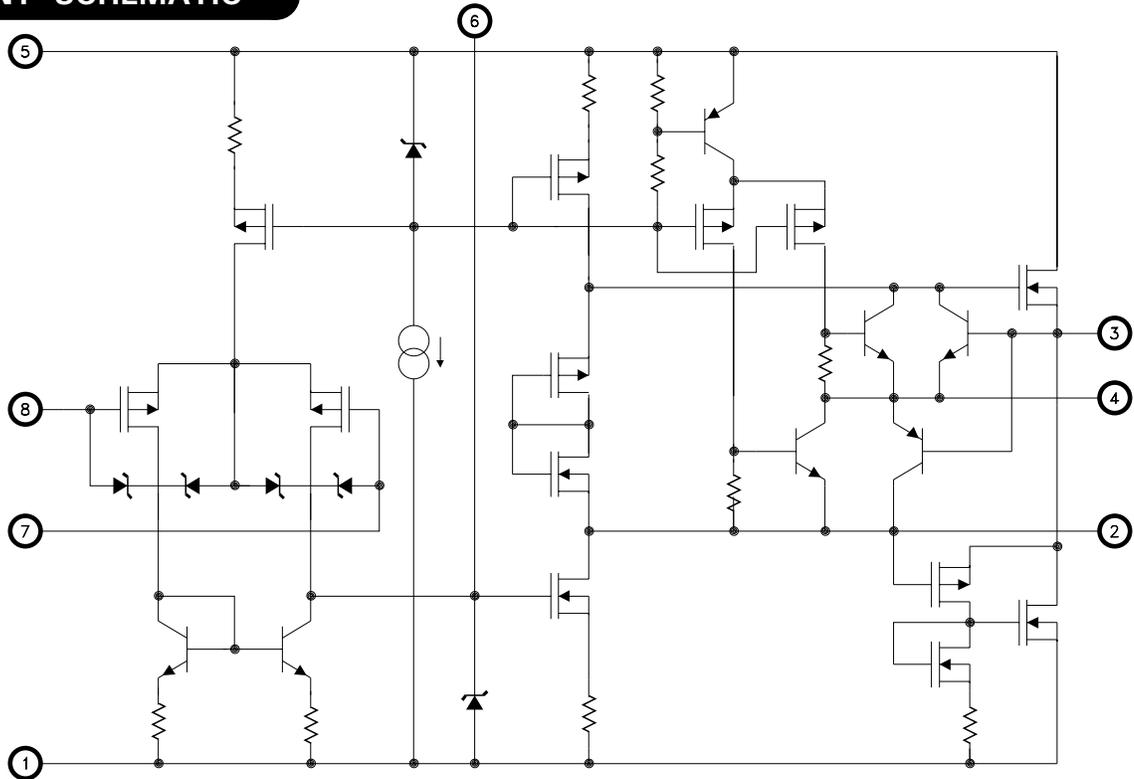

TYPICAL APPLICATIONS

- PA Audio
- Magnetic Deflection
- Motor Drive
- Noise Cancellation

PIN-OUT INFORMATION

- | | |
|-----------------|-----------------------|
| 1 -Vcc | 8 Inverting Input |
| 2 Comp 1 | 7 Non-Inverting Input |
| 3 Output Drive | 6 Comp 2 |
| 4 Current Sense | 5 +Vcc |

ABSOLUTE MAXIMUM RATINGS

V_{CC} ②	Total Supply Voltage	150V	T_{ST}	Storage Temperature	-65°C to +150°C
$\pm I_{OUT}$	Output Current (within S.O.A.)	$\pm 5A$	T_{LD}	Lead Temperature	300°C
V_{IND}	Input Voltage (Differential)	$\pm 16V$	T_C	Case Operating Temperature (MSK148B/149B)	-55°C to +125°C
V_{IN}	Input Voltage (Common Mode)	$\pm V_{CC}$		(MSK148/149)	-40°C to +85°C
T_J	Junction Temperature	150°C	R_{TH}	Thermal Resistance (DC) Junction to Case	1.0°C/W

ELECTRICAL SPECIFICATIONS

Parameter	Test Conditions ①	Group A Subgroup	MSK148B/149B			MSK148/149			Units
			Min.	Typ.	Max.	Min.	Typ.	Max.	
STATIC									
Supply Voltage Range ② ④		-	± 15	± 50	± 75	± 15	± 50	± 75	V
Quiescent Current	$V_{IN} = 0V$	1	-	± 30	± 50	-	± 30	± 50	mA
		2	-	± 20	± 45	-	-	-	mA
		3	-	± 35	± 65	-	-	-	mA
INPUT									
Offset Voltage	$V_{IN} = 0V$	1	-	± 5	± 10	-	± 5	± 15	mV
Offset Voltage Drift ④	$V_{IN} = 0V$	2,3	-	± 10	± 50	-	± 10	-	$\mu V/^\circ C$
Offset Voltage vs $\pm V_{CC}$ ④	$V_{IN} = 0V$	1	-	± 8	± 15	-	± 8	± 15	$\mu V/V$
Input Bias Current ④	$V_{CM} = 0V$	1,3	-	± 20	± 100	-	± 20	± 100	pA
		2	-	-	± 50	-	-	-	nA
Input Impedance ④	(DC)	-	-	10^{11}	-	-	10^{11}	-	Ω
Input Capacitance ④		-	-	5	-	-	5	-	pF
Common Mode Rejection ④	$V_{CM} = \pm 30VDC$	-	90	106	-	90	106	-	dB
Noise	10KHz BW	-	-	10	-	-	10	-	$\mu VRMS$
OUTPUT									
Output Voltage Swing	$I_{OUT} = \pm 5A$ Peak	4	± 40	± 42	-	± 40	± 42	-	V
Output Current	$V_{OUT} = MAX$	4	± 5	± 5.5	-	± 5	± 5.5	-	A
Power Bandwidth ④	$V_{OUT} = 80VPP$	-	-	66	-	-	66	-	KHz
Settling Time to 0.1% ③ ④	10V Step	-	-	2	-	-	2	-	μS
Capacitive Load ④	$A_v = +1V/V$ $C_c = 68pF$	-	10	-	-	10	-	-	nF
TRANSFER CHARACTERISTICS									
Slew Rate	$C_c = Open$	4	20	27	-	20	27	-	$V/\mu S$
Open Loop Voltage Gain ④	$F = 15Hz$	4	94	106	-	94	106	-	dB

NOTES:

- ① Unless otherwise noted $C_c = 10pF$, $R_c = 1.0K\Omega$, $\pm V_{CC} = \pm 50VDC$.
- ② Derate maximum supply voltage 0.5V/°C below $T_c = +25^\circ C$. No derating is needed above $T_c = 25^\circ C$.
- ③ $A_v = -10V/V$ measured in false summing junction circuit.
- ④ Devices shall be capable of meeting the parameter, but need not be tested. Typical parameters are for reference only.
- ⑤ Industrial grade devices shall be tested to subgroups 1 and 4 unless otherwise requested.
- ⑥ Military grade devices ('B' suffix) shall be 100% tested to subgroups 1,2,3 and 4.
- ⑦ Subgroup 5 and 6 testing available upon request.
- ⑧ Subgroup 1,4 $T_c = +25^\circ C$
Subgroup 2,5 $T_c = +125^\circ C$
Subgroup 3,6 $T_A = -55^\circ C$

APPLICATION NOTES

CURRENT LIMIT (SEE TYPICAL CONNECTION DIAGRAM)

A value of current limit resistance can be calculated as follows:

$$R_{CL} = (0.83 - (0.05 * I_{CL})) / I_{CL}$$

Where:

R_{CL} is the current limit resistor value

I_{CL} is the current limit

$0.05 * I_{CL}$ is the voltage dropped in the current limit path across internal impedances other than the actual current limit resistor

0.83 volts is the voltage drop that must be developed across the current limit connections to activate the current limit circuit

The maximum practical value of current limit resistance is 16 ohms. The current limit resistor will decrease available output voltage swing in the following manner:

$$V_R = I_O * R_{CL}$$

V_R is the reduction in output voltage swing due to the current limit resistor. It is recommended the user limit output current to a value as close to the required output current as possible, without clipping output voltage swing. Current limit will vary with case temperature. Refer to the typical performance curves to predict current limit drift. If current limit is not required replace the resistor with a short.

STABILITY

The MSK 148/149 has sufficient phase margin when compensated for unity gain to be stable with capacitive loads of at least 10nF. However, it is recommended that the parallel sum of the input and feedback resistor be 1000 ohms or less for closed loop gains of ten or less to minimize phase shift caused by the R-C network formed by the input resistor, feedback resistor and input capacitance. The user can tailor the performance of the MSK 148/149 to their application using the external compensation pins. The graphs of small signal gain and phase as well as the graphs of slew rate and power response demonstrate the effect of various forms of compensation. The compensation capacitor must be rated at 150 volts working voltage if maximum power supply voltages are used. The compensation resistor and capacitor lead lengths must be kept as short as possible to minimize spurious oscillations. A high quality NPO capacitor is recommended for the compensation capacitor. An effective method of checking amplifier stability is to apply the worst case capacitive load to the output of the amplifier and drive a small signal square wave across it. If overshoot is less than 25%, the system will typically be stable.

INPUT PROTECTION



Input protection circuitry within the MSK 148/149 will clip differential input voltages greater than 16 volts. The inputs are also protected against common mode voltages up to the supply rails as well as static discharge. There are 300 ohm current limiting resistors in series with each input. These resistors may become damaged in the event the input overload is capable of driving currents above 1mA. If severe overload conditions are expected, external input current limiting resistors are recommended.

SAFE OPERATING AREA (SOA)

The MOSFET output stage of this power operational amplifier has two distinct limitations:













1. The current handling capability of the die metallization.
2. The junction temperature of the output MOSFET's.

NOTE: The output stage is protected against transient flyback. However, for protection against sustained, high energy flyback, external fast-recovery reverse biased diodes should be connected from the output to ground.

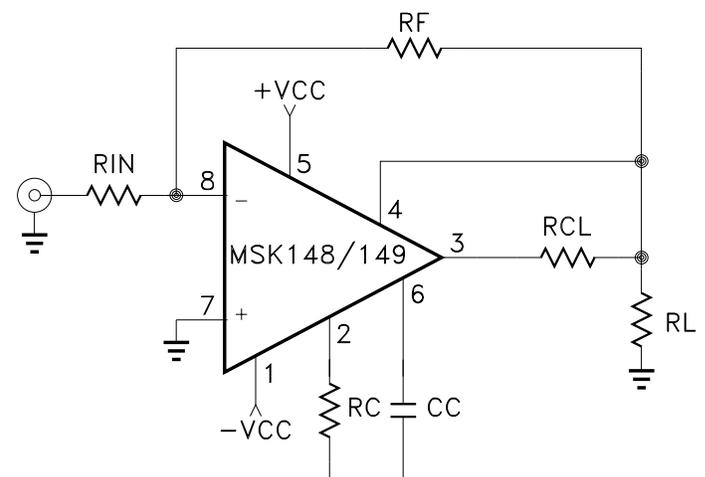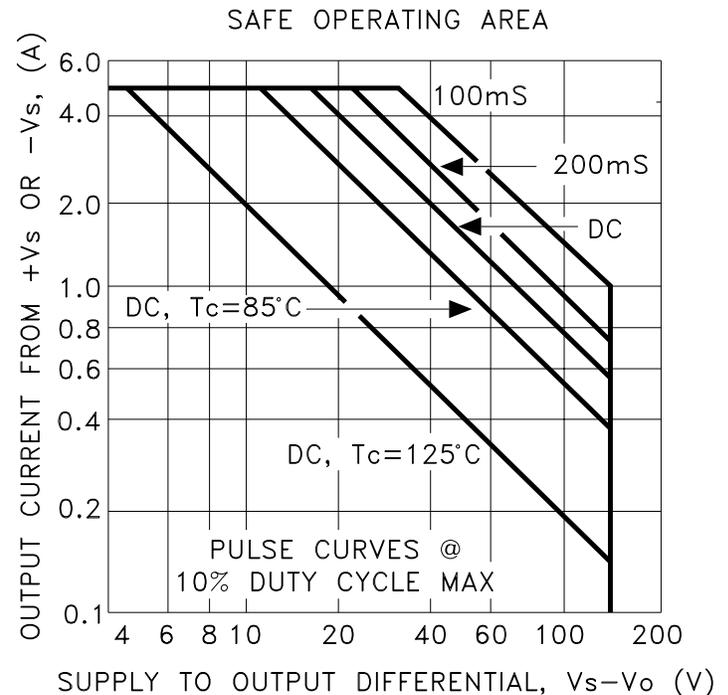


TYPICAL CONNECTION DIAGRAM

TYPICAL PERFORMANCE CURVES

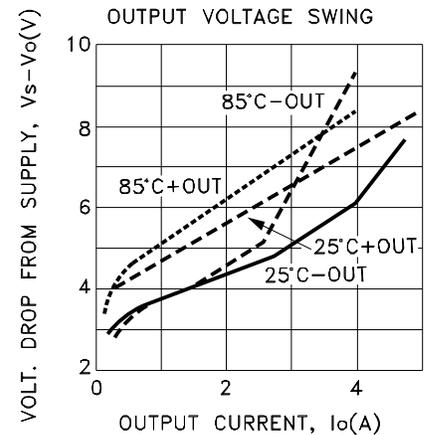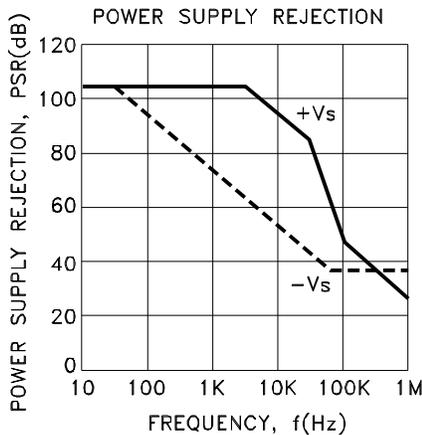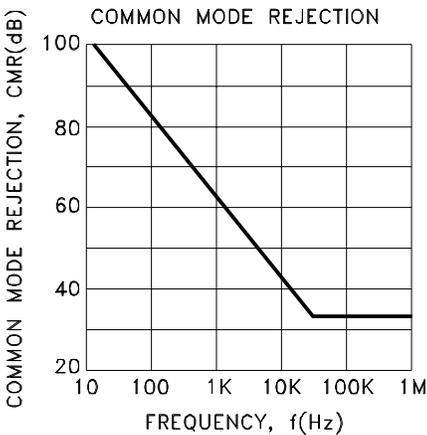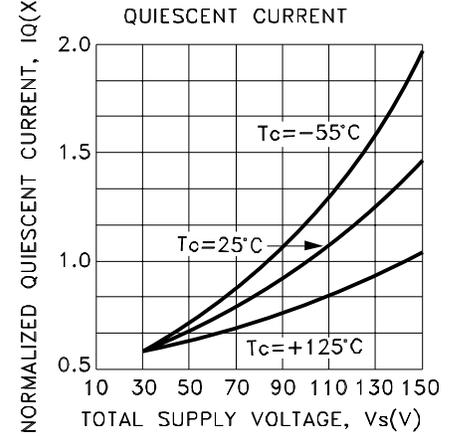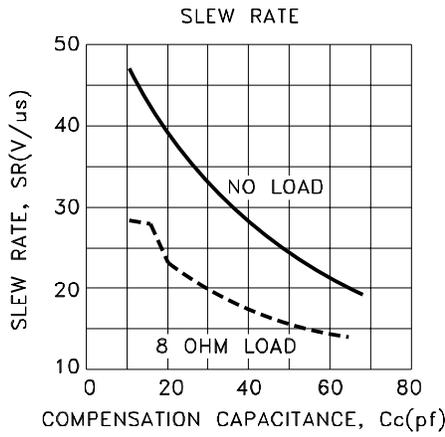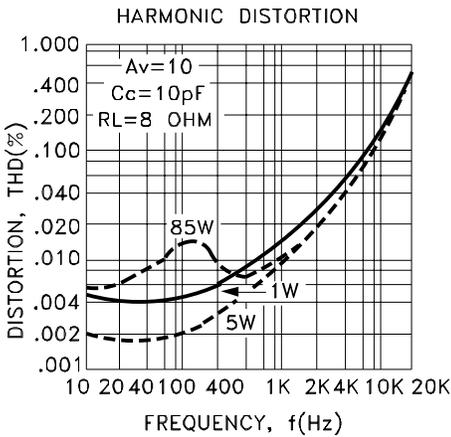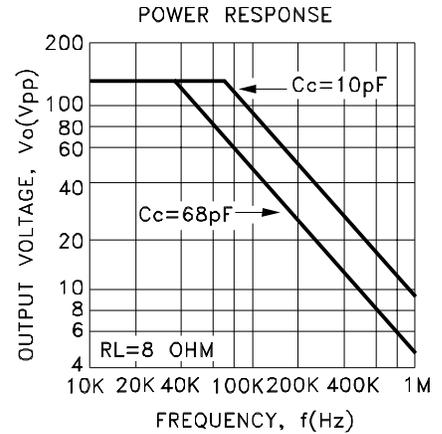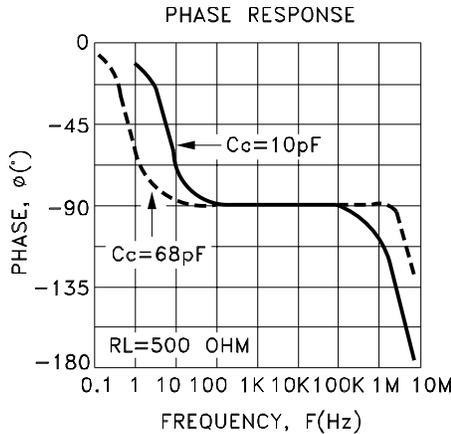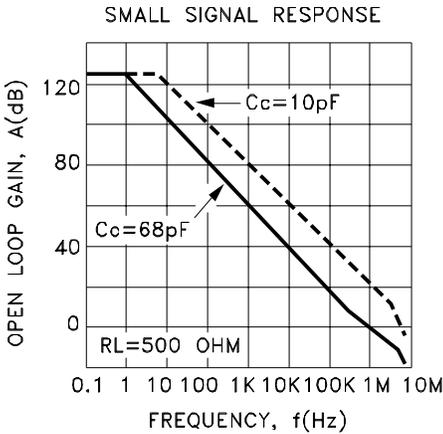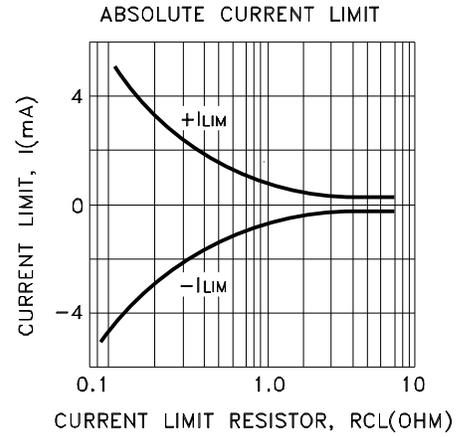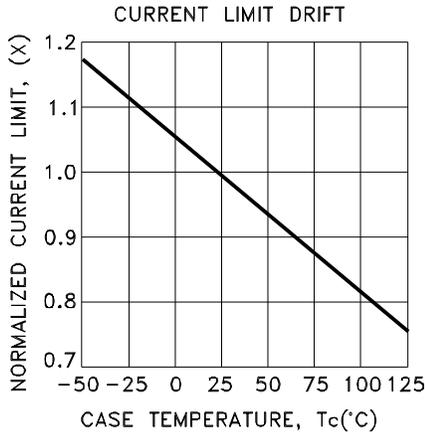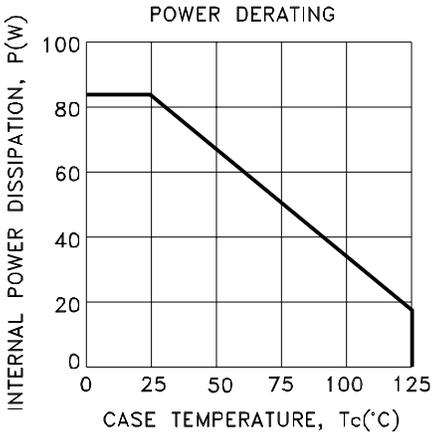

MECHANICAL SPECIFICATIONS

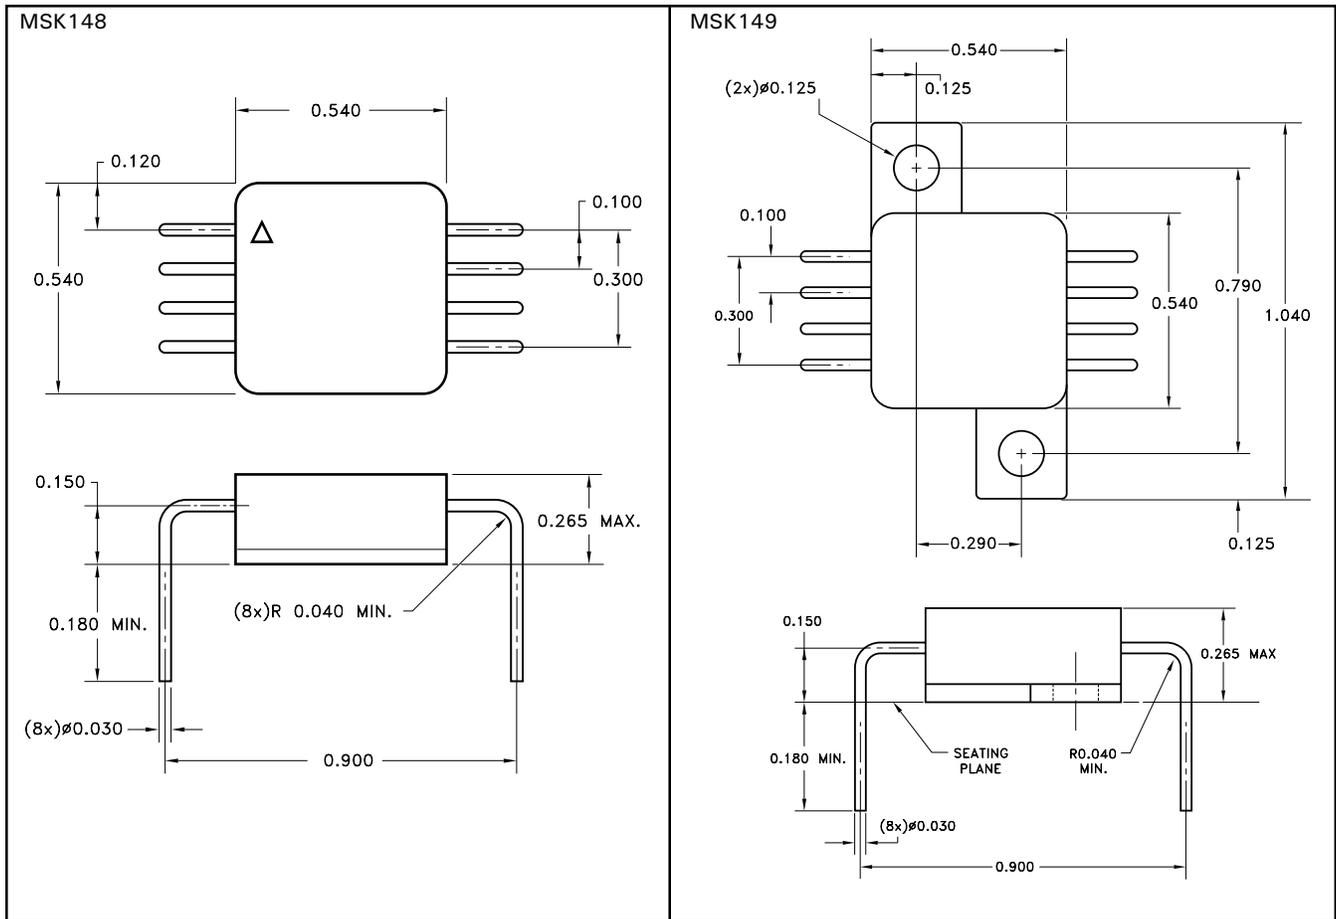

ESD TRIANGLE INDICATES PIN 1.
ALL DIMENSIONS ARE ± 0.010 INCHES UNLESS OTHERWISE LABELED.

ORDERING INFORMATION

Part Number	Screening Level
MSK148	Industrial
MSK148B	Military-Mil-PRF-38534
MSK149	Industrial
MSK149B	Military-Mil-PRF-38534

M.S. Kennedy Corp.
4707 Dey Road, Liverpool, New York 13088
Phone (315) 701-6751
FAX (315) 701-6752
www.mskennedy.com

The information contained herein is believed to be accurate at the time of printing. MSK reserves the right to make changes to its products or specifications without notice, however, and assumes no liability for the use of its products.