

2SB1422

Silicon PNP Epitaxial Planar Darlington Type

AF Amplifier

■ Features


- High DC current gain (h_{FE})
- Built-in 60V Zener diode between C and B
- Darlington configuration

■ Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)


Item	Symbol	Value	Unit
Collector-base voltage	V_{CB0}	-60 ± 10	V
Collector-emitter voltage	V_{CEO}	-60 ± 10	V
Emitter-base voltage	V_{EB0}	-5	V
Peak collector current	I_{CP}	-1.5	A
Collector current	I_C	-1.0	A
Collector power dissipation	P_C	1.2	W
		5.0*	
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	$-55 \sim +150$	$^\circ\text{C}$

* With a $100 \times 100 \times 2\text{mm}$ Al heat sink at $T_a=25^\circ\text{C}$

■ Package Dimensions

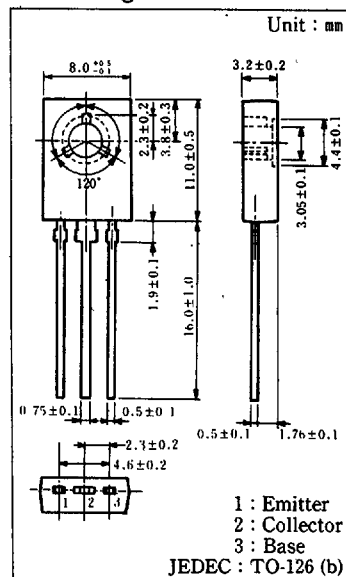

■ Inner Circuit



■ Electrical Characteristics ($T_c=25^\circ\text{C}$)

Item	Symbol	Condition	min.	typ.	max.	Unit
Collector cutoff current	I_{CBO}	$V_{CB} = -25\text{V}, I_E = 0$			-1	μA
Emitter cutoff current	I_{EBO}	$V_{EB} = -4\text{V}, I_C = 0$			-2	mA
Collector-base voltage	V_{CB0}	$I_C = -100\mu\text{A}, I_E = 0$	-50		-70	V
Collector-emitter voltage	V_{CEO}	$I_C = -1\text{mA}, I_B = 0$	-50		-70	V
DC current gain	h_{FE}^*	$V_{CE} = -10\text{V}, I_C = -1.0\text{A}$	4000		40000	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -1.0\text{A}, I_B = -1.0\text{mA}$			-1.8	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = -1.0\text{A}, I_B = -1.0\text{mA}$			-2.2	V

* h_{FE} Classifications

Class	Q	R	S
h_{FE}	4000~10000	8000~20000	16000~40000

