
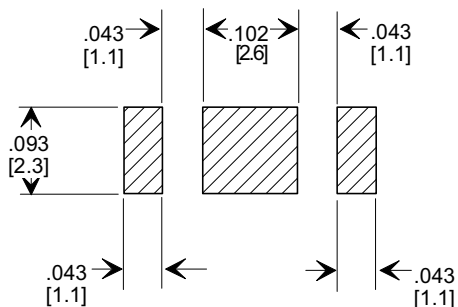
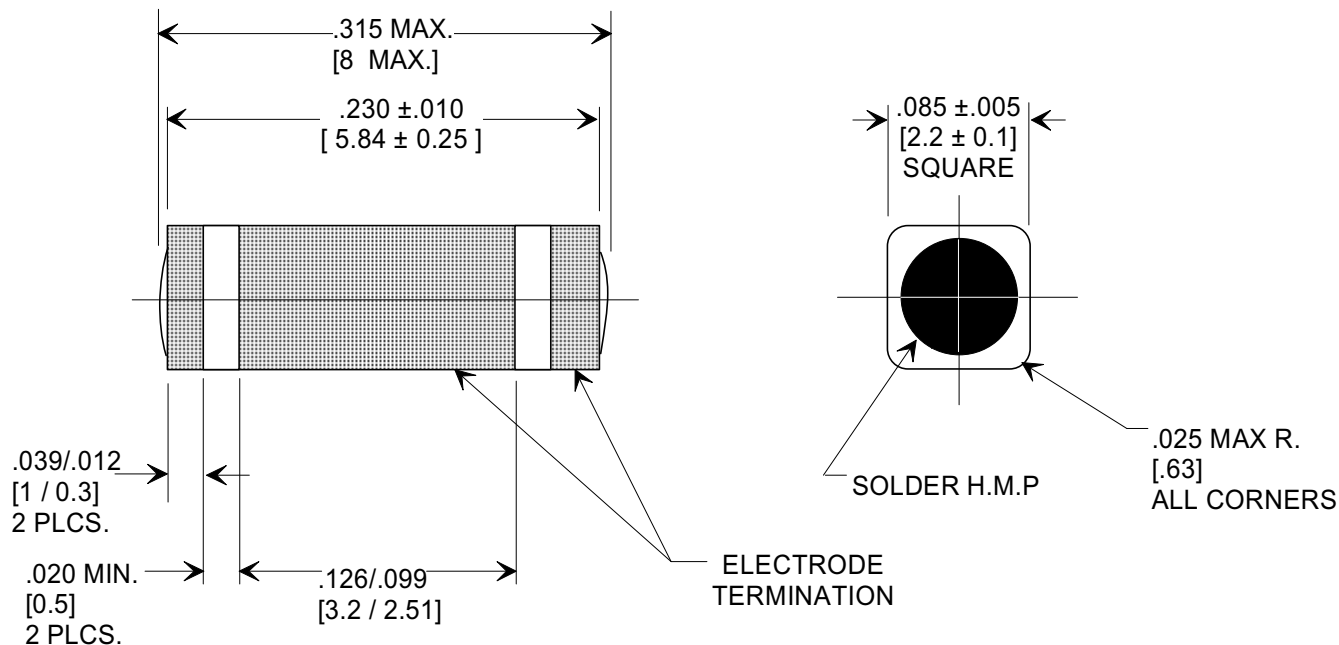


DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC []

**Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.**



1. INDUCTANCE TO BE 0.1 H MINIMUM.
2. PACKAGE: BULK OR BLISTER TAPE TO IEC-286-3 TYPE II AND EIA-481-A.

008	4000 pF	+80% / -20%	100@+85°C	300 VDC	10 A	SOLDER	13	52	70
006	100 pF	+80% / -20%	100	300 VDC	10 A	SOLDER	----	3	16
005	1000 pF	GMV	100	300 VDC	10 A	SOLDER	7	40	65
003	2000 pF	GMV	100	300 VDC	10 A	SOLDER	10	45	70
ITEM	CAP.	TOLERANCE	WVDC +125°C	TEST VOI TAGE	IDC	ELECTRODE TERMINATION	10 MHZ	100 MHZ	1 GHZ
							TYPICAL NO LOAD INSERTION LOSS dB AT 25°C PER MIL-STD-220		

REVISION RECORD		Title	
Original Release C.O.	0	SURFACE MOUNT SQUARE STYLE PI FILTER	
DELETED ITEMS 000, 001, 002 & 007. S.M. 01-16-97		Drawn FG 9-9-94	
970109-3	8	Approved NV 9-9-94	
DIM. .085 ±.005 WAS .083 ±.004. S.M. 07-1598		A 4700-STYLE	
19980715-8-03			

X-2015 Rev-0