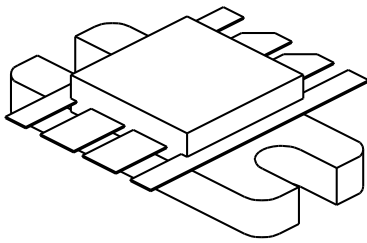


0104-100

100 Watts, 28 Volts, Class AB
Defcom 100 - 400 MHz

<p>GENERAL DESCRIPTION The 0104-100 is a double input matched COMMON EMITTER broadband transistor specifically intended for use in the 100-400 MHz frequency band. It may be operated in Class AB or C. Gold metallization and silicon diffused resistors ensure ruggedness and high reliability.</p>	<p>CASE OUTLINE 55JT, Style 2</p> 
<p>ABSOLUTE MAXIMUM RATINGS</p> <p>Maximum Power Dissipation @ 25°C 270 Watts</p> <p>Maximum Voltage and Current</p> <p>BVces Collector to Emitter Voltage 60 Volts BVebo Emitter to Base Voltage 4.0 Volts Ic Collector Current 16 A</p> <p>Maximum Temperatures</p> <p>Storage Temperature - 65 to +150°C Operating Junction Temperature +150°C</p>	

ELECTRICAL CHARACTERISTICS @ 25 °C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout	Power Output	F = 400 MHz	100			Watts
Pin	Power Input	Vcc = 28 Volts			20	Watts
Pg	Power Gain		7.0	8.0		dB
η_c	Efficiency			50		%
VSWR	Load Mismatch Tolerance				5:1	

BVebo¹	Emitter to Base Breakdown	Ie = 5 mA	4.0			Volts
BVces¹	Collector to Emitter Breakdown	Ic = 100 mA	60			Volts
BVceo¹	Collector to Emitter Breakdown	Ie = 100 mA	32			Volts
Cob¹	Output Capacitance	Vcb = 28 V, F = 1 MHz		70		pF
h_{FE}¹	DC - Current Gain	Vce = 5 V, Ic = 1 A	20			
θ_{jc}	Thermal Resistance				0.65	°C/W

Note 1: per side

Issue August 1996


GHz TECHNOLOGY INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. GHz RECOMMENDS THAT BEFORE THE PRODUCT(S) DESCRIBED HEREIN ARE WRITTEN INTO SPECIFICATIONS, OR USED IN CRITICAL APPLICATIONS, THAT THE PERFORMANCE CHARACTERISTICS BE VERIFIED BY CONTACTING THE FACTORY.



GHZ TECHNOLOGY
RF·MICROWAVE SILICON POWER TRANSISTORS


0104-100

POWER GAIN VS FREQUENCY

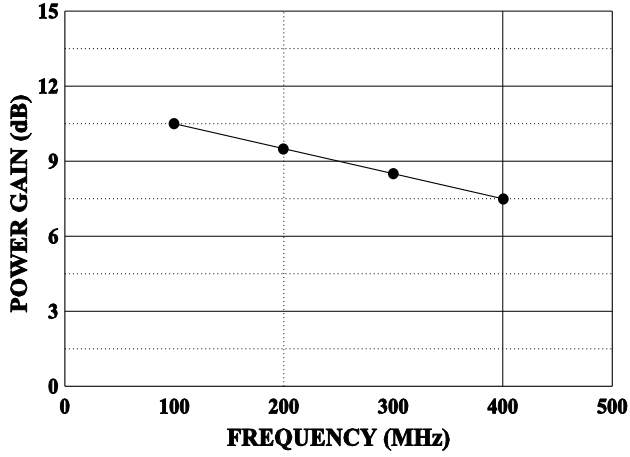


POWER OUTPUT vs POWER INPUT

$V_{cc} = 28V$ $f = 400MHz$

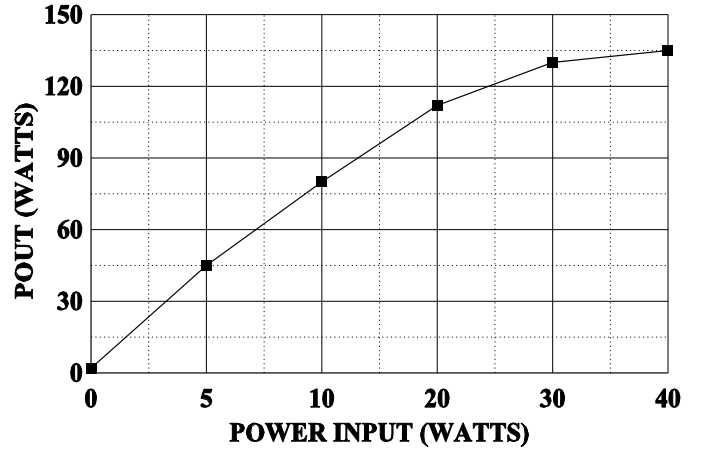


DC SAFE OPERATING AREA

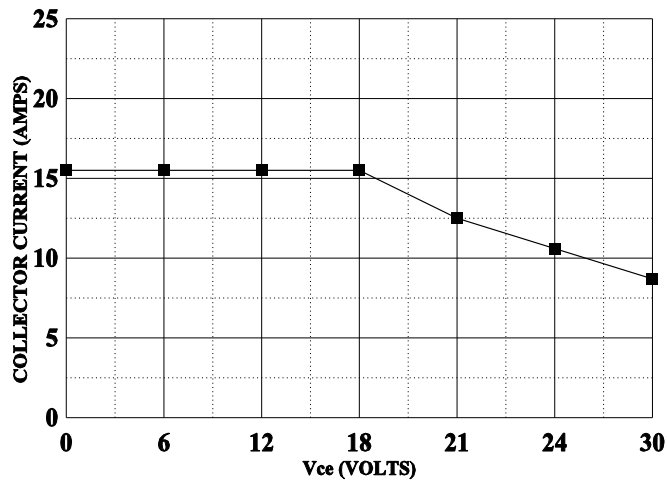


SMITH CHART

NORMALIZED IMPEDANCE AND ADMITTANCE COORDINATES

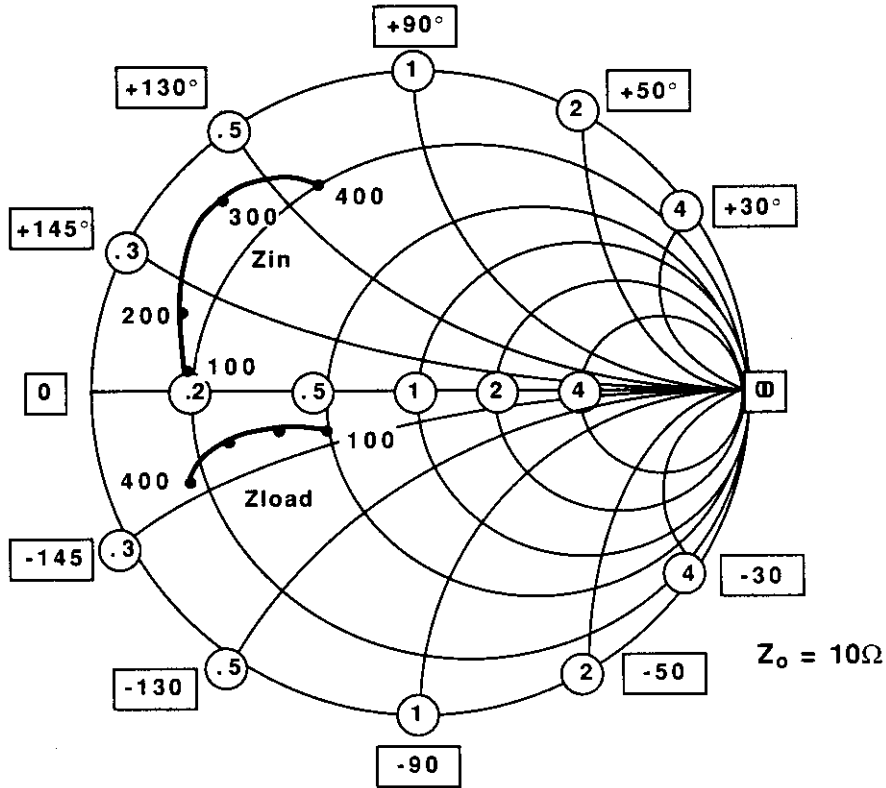

Typical series input and output impedances at rated power output conditions for single side normalized to 10 ohms.

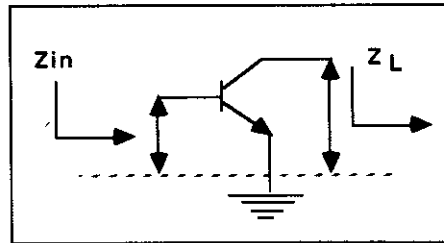

FREQUENCY MHz	R	Zin jX	FREQUENCY MHz	R	Zload jX
100	2.2	1.0	100	5.0	-2.5
200	1.4	2.7	200	4.0	-1.7
300	1.0	4.0	300	3.0	-1.5
400	1.8	5.5	400	1.8	-2.0