



Data Display Products

ARRAY PCB MOUNT LEDs

T-1¼ MEDIUM PROFILE VARIABLE ARRAY

T-41-23

Red, Amber or Green
Two to Sixteen LEDs per Array
Color Combinations Available

Model	Series Listed by Increasing Luminous Intensity	Encapsulation	Color
PCLR190N ⁽¹⁾ (Right Angle Mount)	-S (Diffused Red Only) -L	C (Non-Diffused) For Diffused, Omit Letter	R (RED, S & L Series) A (AMBER, L Series) G (GREEN, L Series)




1. Replace N by the number of LEDs in the array, 2 - 16.

NOTE: Do not mix series within the model.

TO ORDER:

To build a part number for a uniform color array, select one **BOLD** component from each column in above table except where noted. For arrays with multiple colors, select the Model, Series and Encapsulation then separate each additional Series, Encapsulation, Color Code sequence by a /.

Example: PCLR1907-LCR (T-1¼, Medium Profile, Seven LED Array, All LEDs Non-Diffused RED)
 PCLR1903-LG/LR/LR (T-1¼ Medium Profile, Three LED Array, Diffused GREEN, RED, and RED)

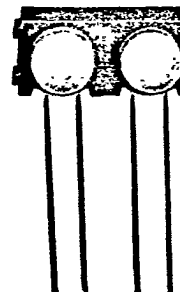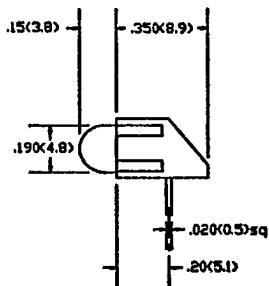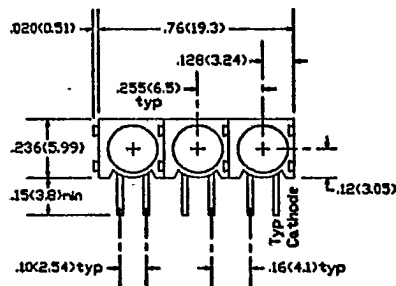

PCLR1903

All dimensions are in inches(mm)
 Tolerances: .xx"(x) +/- .025, .xxx"(xx) +/- .010*(.25)
 Specifications are subject to change without notice.