



Series 547 Universal SOIC Zero Insertion Force Test Socket

Features:

- Devices with up to 44 pins can be inserted without bending or otherwise damaging the legs, since no force is required to either insert or remove the component from the socket.
- Accepts SOIC gull-wing and J-lead devices, up to 44 pins on .050 [1.27] lead pitch, body widths from .150 to .600 [3.81 to 15.24].
- Optional device lifter for easy package removal.

Specifications:




- Body material is black UL 94V-0 Glass-filled Polyphenylene Sulfide (PPS).
- Contacts are Beryllium Copper Alloy 172 per QQ-C-533.
- Contact plating is 20μ [.51μm] min. Gold per MIL-G-45204 over 100μ [2.54μm] min. Nickel per QQ-N-290 over 20μ [.51μm] min. Copper per MIL-C-14550.
- Hardware is Stainless Steel.
- Contact current rating=1 Amp.
- Operating temperature=257°F [125°C].

Mounting Considerations:

- See schematic below.

ALL DIMENSIONS: INCHES [MILLIMETERS]

All tolerances ± .005 [.13]
unless otherwise specified

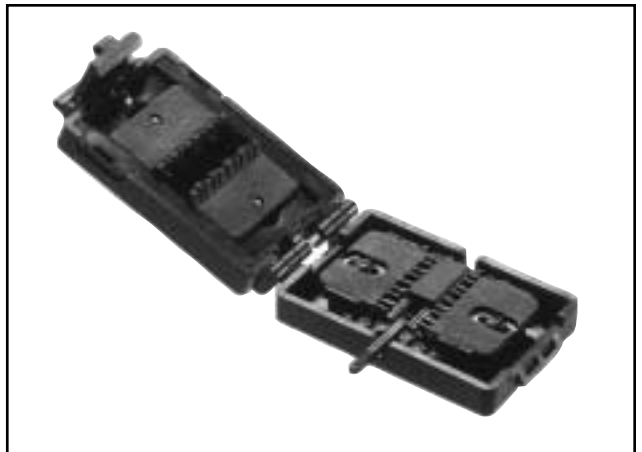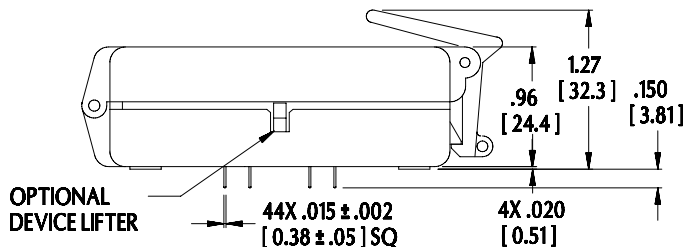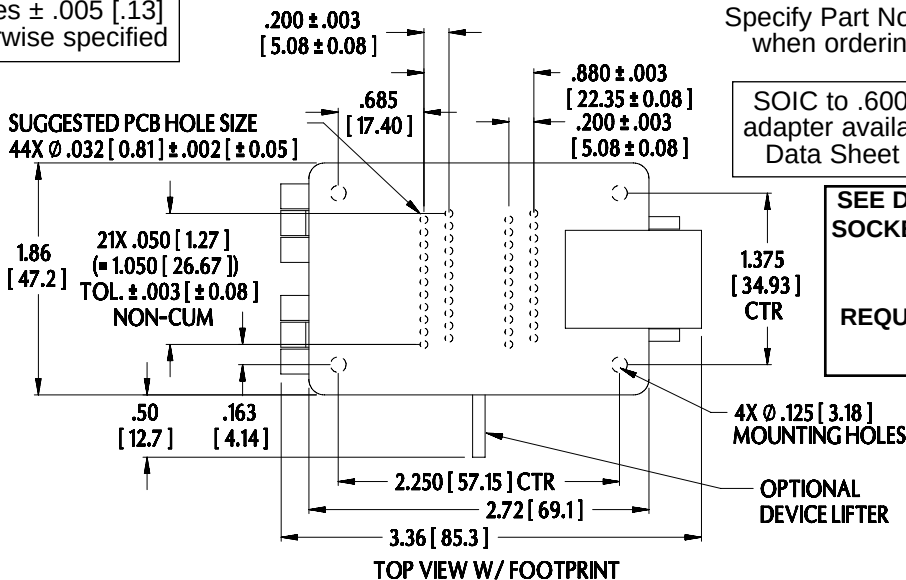

Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.

ORDERING INFORMATION

Specify Part No. 44-547-11 when
ordering without lifter

-or-

Specify Part No. 44-547-11E
when ordering with lifter

SOIC to .600 [15.24] DIP
adapter available. Consult
Data Sheet No. 10016.

**SEE DATA SHEET 10020 FOR
SOCKET SET-UP PER DEVICE
USED
-OR-
REQUEST SALES DRAWING
1109450**

ARIES
ELECTRONICS, INC.
<http://www.arieselec.com> • info@arieselec.com

NORTH AMERICA
Frenchtown, NJ USA
TEL: (908) 996-6841
FAX: (908) 996-3891



UK/IRELAND/GB
TEL: +44 870 240 0249
FAX: +44 1653 600493
uking@arieselec.com

EUROPE/MAINLAND/HOLLAND
TEL: +31 78 615 94 65
FAX: +31 78 615 43 11
europe@arieselec.com

10015
REV.B