


Mini SIL Single Output TTL Compatible Active Delay Lines

TIME DELAYS * (nS) ±5% or ±2 nS†	PART NUMBER	TIME DELAYS * (nS) ±5% or ±2 nS†	PART NUMBER
5	EP9748-5	60	EP9748-60
10	EP9748-10	75	EP9748-75
15	EP9748-15	100	EP9748-100
20	EP9748-20	125	EP9748-125
25	EP9748-25	150	EP9748-150
30	EP9748-30	175	EP9748-175
35	EP9748-35	200	EP9748-200
40	EP9748-40	225	EP9748-225
45	EP9748-45	250	EP9748-250
50	EP9748-50		

† Whichever is greater. * Delay Times referenced from input to leading edges at 25°C, 5.0V, with no load.

DC Electrical Characteristics					
Parameter	Test Conditions	Min	Max	Unit	
V _{OH}	High-Level Output Voltage	V _{CC} = min. V _{IL} = max. I _{OH} = max	2.7		V
V _{OL}	Low-Level Output Voltage	V _{CC} = min. V _{IH} = min. I _{OL} = max	0.5		V
V _{IK}	Input Clamp Voltage	V _{CC} = min. I _I = I _{IK}	-1.2		V
I _{IH}	High-Level Input Current	V _{CC} = max. V _{IN} = 2.7V	50		µA
		V _{CC} = max. V _{IN} = 5.25V	1.0		mA
I _{IL}	Low-Level Input Current	V _{CC} = max. V _{IN} = 0.5V	-2		mA
I _{OS}	Short Circuit Output Current	V _{CC} = max. V _{OUT} = 0.	-40		mA
I _{CCH}	High-Level Supply Current	V _{CC} = max. V _{IN} = OPEN	75		mA
I _{CCL}	Low-Level Supply Current	V _{CC} = max. V _{IN} = 0	75		mA
T _{RO}	Output Rise Time	T _d ≤ 500 nS (0.75 to 2.4 Volts)	4		nS
N _H	Fanout High-Level Output	V _{CC} = max. V _{OH} = 2.7V	20		TTL LOAD
N _L	Fanout Low-Level Output	V _{CC} = max. V _{OL} = 0.5V	10		TTL LOAD


Schematic

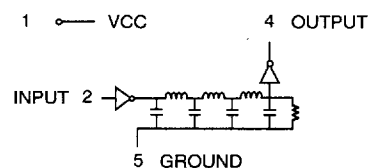

Recommended Operating Conditions		Min	Max	Unit
V _{CC}	Supply Voltage	4.75	5.25	V
V _{IH}	High-Level Input Voltage	2.0		V
V _{IL}	Low-Level Input Voltage		0.8	V
I _{IK}	Input Clamp Current		-18	mA
I _{OH}	High-Level Output Current		-1.0	mA
I _{OL}	Low-Level Output Current		20	mA
PW*	Pulse Width of Total Delay	40		%
d*	Duty Cycle		40	%
T _A	Operating Free-Air Temperature	0	+70	°C

*These two values are inter-dependent.

Package Dimensions

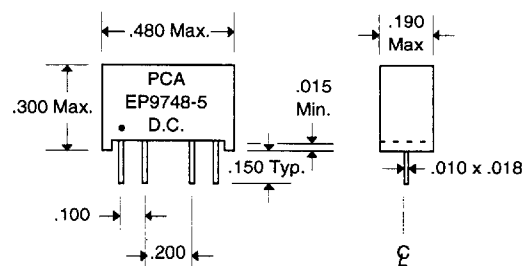

Input Pulse Test Conditions @ 25° C		Unit	
E _{IN}	Pulse Input Voltage	3.2	Volts
PW	Pulse Width % of Total Delay	110	%
T _{RI}	Pulse Rise Time (0.75 - 2.4 Volts)	2.0	nS
PRR	Pulse Repetition Rate @ T _d ≤ 200 nS	1.0	MHz
	Pulse Repetition Rate @ T _d > 200 nS	100	KHz
V _{CC}	Supply Voltage	5.0	Volts.

DSD9748 Rev. A 2/5/96

OAF-CSO1 Rev. B 8/25/94

Unless Otherwise Noted Dimensions in Inches

Tolerances:

Fractional = ± 1/32

.XX = ± .030 .XXX = ± .010



6852109 0000566 759

16799 SCHOENBORN ST.
NORTH HILLS, CA 91343
TEL: (818) 892-0761
FAX: (818) 894-5791

7