

SUBMINIATURE

LT-5™ Time Lag Fuse 663 Series



ELECTRICAL CHARACTERISTICS:

% of Ampere Rating	Time
210%	2 minutes, Maximum
275%	.4 sec Min. ; 10 seconds Max
400%	.15 sec Min. ; 3 seconds Maximum
1000%	.02 sec Min. .15 seconds Maximum

AGENCY APPROVALS: IEC 127-3/1: Semko and VDE approved through 4 amps. Recognized under the Components Program Underwriters Laboratories and recognized by CSA.

INTERRUPTING RATINGS: 35A or 10X rated current; which ever is greater.

PACKAGING:

Please refer to the following suffixes when ordering.

Bulk 100 pieces:

Short Lead (Bulk)

HXSL

Long Lead (Bulk)

HXLL

Tape and Reel 750 pieces:

Long Lead (Tape and Reel IEC 286-2)


ZRLL

PATENTED

ORDERING INFORMATION:

Catalog Number	Ampere Rating	Voltage Rating	Nominal Melting I ² t (A ² Sec)
0663.050	.050	250	0.03
0663.063	.063	250	0.05
0663.080	.080	250	0.07
0663.100	.100	250	0.08
0663.125	.125	250	0.12
0663.160	.160	250	0.24
0663.200	.200	250	0.35
0663.250	.250	250	0.6
0663.315	.315	250	0.8
0663.400	.400	250	1.1
0663.500	.500	250	2.5
0663.630	.630	250	4
0663.800	.800	250	8
0663.001.	1.00	250	12
0663.1.25	1.25	250	15
0663.01.6	1.60	250	30
0663.002.	2.00	250	34
0663.02.5	2.50	250	55
0663.03.15	3.15	250	76
0663.004.	4.00	250	80
0663.005.	5.00	250	230
0663.06.3	6.30	250	360

Refer to page 96 for LT-5™ holder information.

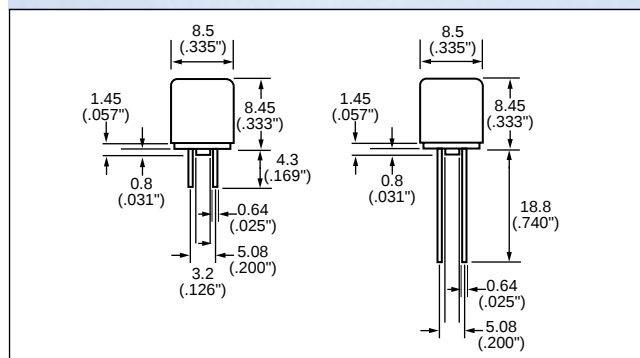

Average Time Current Curves

