
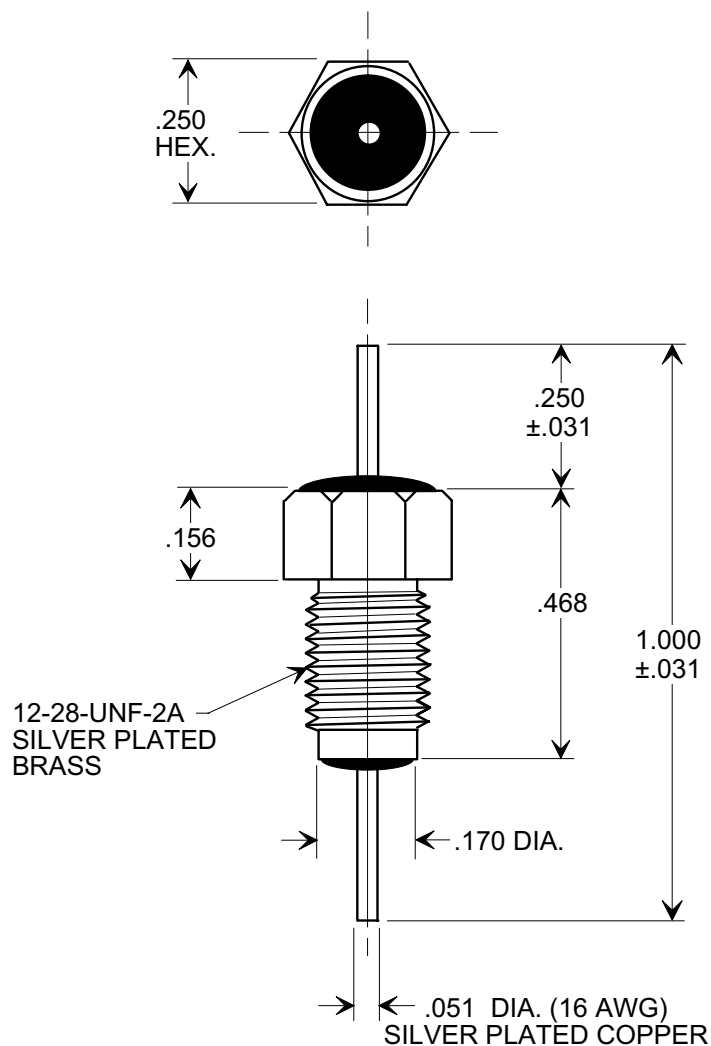



**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**

Electrical Testing  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.



NOTE:  
SUPPLIED WITH SILVER PLATED  
HEX NUT AND INTERNAL TOOTH  
LOCK WASHER

**ORDERING INFORMATION**

TUSONIX PART NO.	2499-003-U2M0-101K
STYLE NO.	2499-003
VALUE	100 pF
VALUE TOL.	± 10%
TEMP. COEF.	U2M
RATING	500 WVDC
OPERATING RANGE	-55° TO +85°C
TO TUSONIX SPEC. UNLESS STATED OTHERWISE	

X-2015 Rev-0	REVISION RECORD	Original Release C.O. 20000508-5-01			--TOLERANCES-- Unless Otherwise Specified		Title <b>BUSHING TYPE FEED-THRU CAPACITOR</b>	
					DECIMAL ± .015		Drawn L.E. 05-09-00	
					ANGLES ±		Scale 3 X	
					<b>TUSONIX</b> TUCSON, ARIZONA		Approved T.C. 05-09-00	
							<b>A</b> 2499-003-U2MO-101 K	