



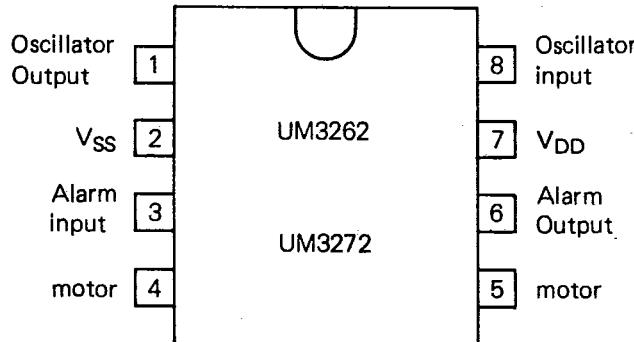
**UMC**

## **UM3262 • 3272 SERIES**


### **ANALOG ALARM CLOCK CIRCUITS**

- C-MOS integrated circuit for battery-operated, quartz crystal clocks
- Precision 32768 Hz quartz crystal controlled oscillator
- Very low current consumption: typ 2  $\mu$ A, max 5  $\mu$ A
- Output for 1 Hz stepper motor with three pulse duration options: 48.6ms, 31.2ms and 15.6ms
- Alarm outputs: UM 3262: 2048 x 8 x ½ x ¼ Hz  
UM 3272: 2048 x 2 x 1 Hz

#### **PIN CONFIGURATION:**



#### **TYPICAL APPLICATION:**

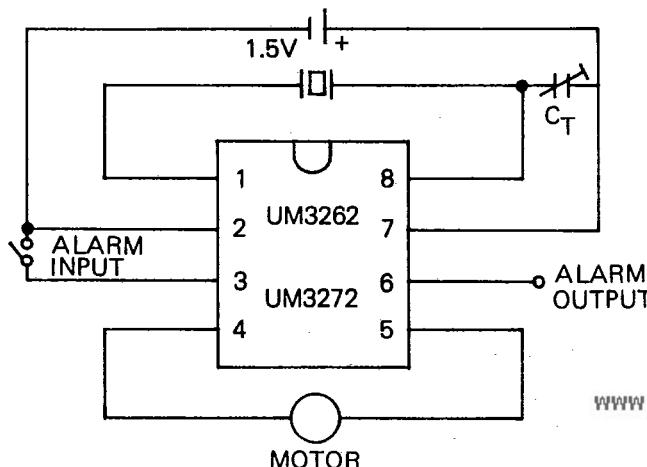

## ABSOLUTE MAXIMUM RATINGS:

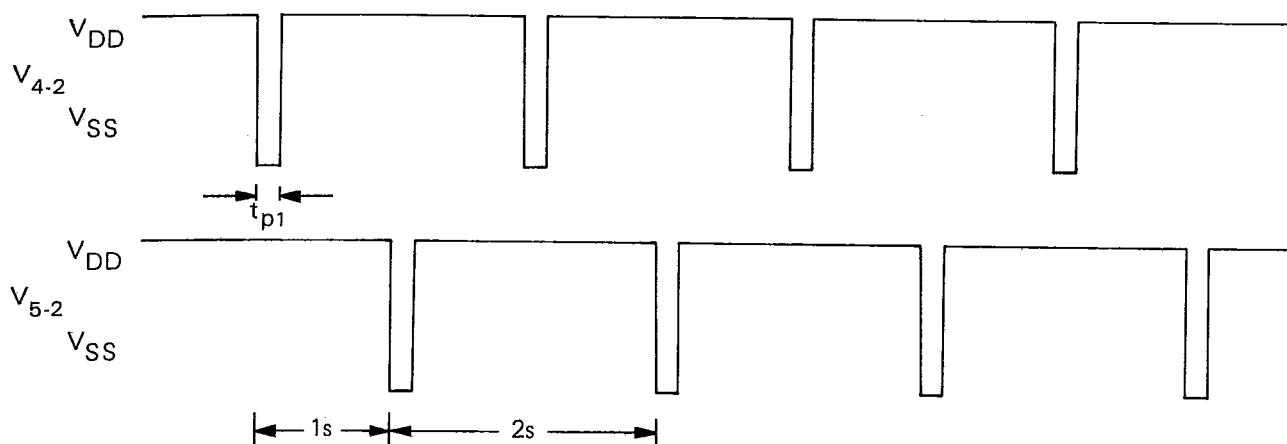
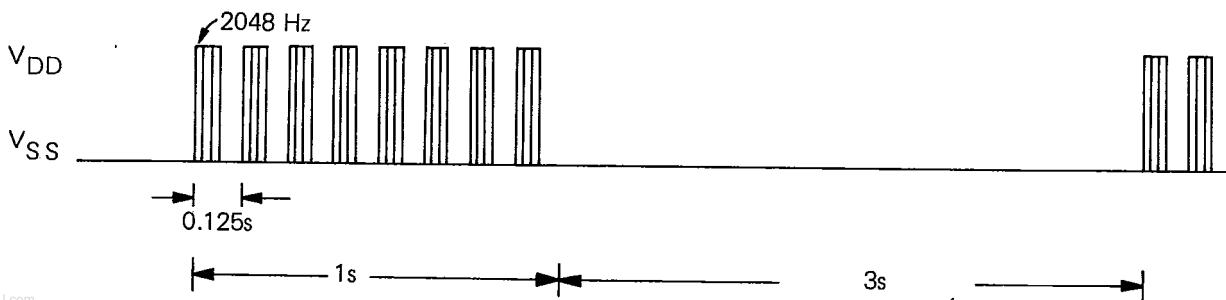
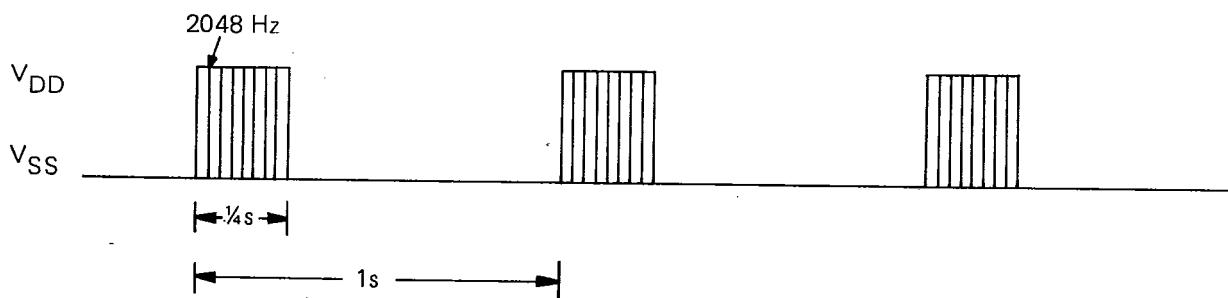
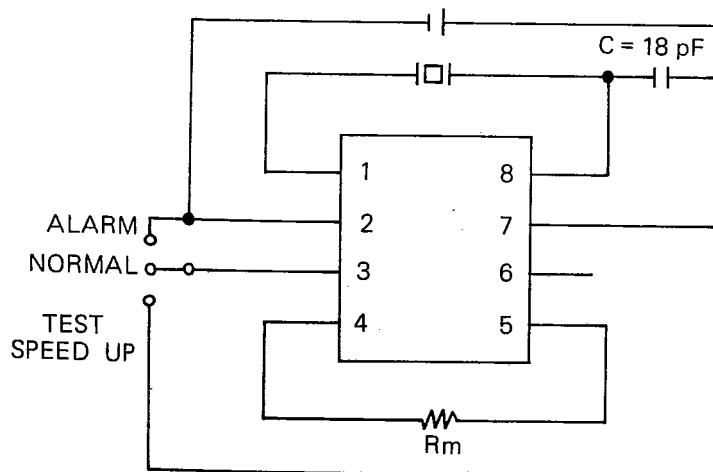
Supply voltage, $V_{DD}$	.....	-1.7 to +3V
Oscillator input/output voltage, $V_{8-2}$ and $V_{1-2}$	.....	0 to $V_{DD}$
Output short-circuit duration	.....	indefinite
Operating ambient temperature, $T_A$	.....	-10 to 60°C
Storage temperature, $T_{STG}$	.....	-30 to 125°C

## ELECTRICAL CHARACTERISTICS:

$V_{DD} = 1.4V$ ,  $V_{SS} = 0V$ ,  $F_{osc} = 32768Hz$ ,  $T_{amb} = 25^\circ C$  unless otherwise specified

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITIONS
Supply voltage	$V_{DD}$	1.1	—	1.8	V	$R_m = \infty$
Supply current	$I_{DD}$	—	2	5	$\mu A$	$R_m = \infty$
Motor output:						
cycle time	$t_1$	—	2	—	s	—
pulse duration	$t_{p1}$	—	*	—	ms	
current into load	$I_{4-5}$	$\pm 4$	—	—	mA	$R_m = 200\Omega$ ; $V_{DD} = 1.2V$
output impedance	$R_{4-5}$	—	60	—	$\Omega$	$R_m = 200\Omega$ .
Alarm output:						
sink current	$I_6$	0.3	1	—	mA	$R = 1k\Omega$ ; $V_{DD} = 1.4V$ .
driving current	$I_6$	0.3	1	—	mA	$R = 1K\Omega$ ; $V_{DD} = 1.4V$ .
Alarm input delay	$t_a$	0	—	70	ms	—
Alarm input current	$I_3$	—	-5	-10	$\mu A$	—
Oscillator polarization						
resistance	$R_p$	15	20	50	$M\Omega$	—
Oscillator output						
capacitance (pin 1)	$C_{out}$	—	18	—	pF	—
Oscillator input						
capacitance (pin 8)	$C_{in}$	—	2	—	pF	—
Oscillator stability	$\Delta f/f$	—	0.2	1	ppm	$\Delta V_{DD} = 100 mV$

\* pulse duration: 46.8ms, 31.2ms, 15.6ms.

**MOTOR OUTPUT WAVEFORMS:****ALARM OUTPUT WAVEFORMS: 2048 x 8 x ½ x ¼ Hz****ALARM OUTPUT WAVEFORMS: 2048 x 2 x 1 Hz****TEST CIRCUIT:**

- Normal mode: Pin 3 open
- Alarm mode: Pin 3 connected to  $V_{SS}$
- Test speed up: Pin 3 connected to  $V_{DD}$

Quartz crystal parameters:

$$\begin{aligned} f &= 32768 \text{ Hz} \\ C_L &= 10 \text{ pF} \\ C_1 &= 2.5 \text{ fF} \\ C_0 &= 1.5 \text{ pF} \\ R_s &= 30 \text{ k}\Omega \\ C &= 18 \text{ pF} \end{aligned}$$

# ORDERING INFORMATION

TYPE	ALARM OUTPUT	MOTOR PULSE OUTPUT DURATION (ms)
<b>8-LEAD DUAL IN-LINE; PLASTIC</b>		
UM3262	2048 x 8 x ½ x ¼ Hz	46.8
UM3262-1	2048 x 8 x ½ x ¼ Hz	31.2
UM3262-2	2048 x 8 x ½ x ¼ Hz	15.6
UM3272	2048 x 2 x 1 Hz	46.8
UM3272-1	2048 x 2 x 1 Hz	31.2
UM3272-2	2048 x 2 x 1 Hz	15.6
<b>CHIP</b>		
UM3262H	bond option	46.8
UM3262-1H	bond option	31.2
UM3262-2H	bond option	15.6

## BONDING INFORMATION:

OSC INPUT	VDD	VDD'	ALARM OUTPUT	MOTOR	PAD NO.	DESIGNATION	X (mils)	Y (mils)
					1	OSC OUTPUT	-37.3	-28.8
					2	VSS	- 9.2	-28.8
					3	VSS'	- 2.8	-28.8
					4	NC	3.6	-28.8
					5	ALARM INPUT	11.6	-28.8
					6	MOTOR	19.8	-26.4
					7	MOTOR	37.3	28.8
					8	ALARM OUTPUT	6.0	28.8
					9	VDD'	- 2.4	28.8
					10	VDD	- 8.8	28.8
					11	OSC INPUT	-37.3	28.8

NOTE:

1. All X and Y coordinates are referenced to the center of the chip.
2. All pads are 4 mils by 4 mils except pad 4.
3. Bond VDD and VSS' (VDD' and VSS open) for 2048 x 8 x ½ x ¼ alarm output;  
bond VDD' and VSS (VDD and VSS. open) for 2048 x 2 x 1 alarm output.



# UNITED MICROELECTRONICS CORP.

Factory:

No. 3, Industrial East Third Road, Science-Based Industrial Park, Hsin-Chu City, Taiwan,  
Republic of China TEL: (035) 773131 TLX: 31476 UMCHSC

Sales office:

Formosa Plastics Building (B) 9th Fl., No. 201-26, Tung Hwa N. Road, Taipei, Taiwan  
Republic of China TEL: (02) 7152455 TLX: 28560 UMCTPE