



**Hot air tools**  
**made for professionals**


*top design*  
*and ergonomical*



**WELDY PRO • WELDY PLUS • WELDY PLAST • WELDY POWER**

*terminal display with memory function for  
reproducible results from the work*

### Accessories

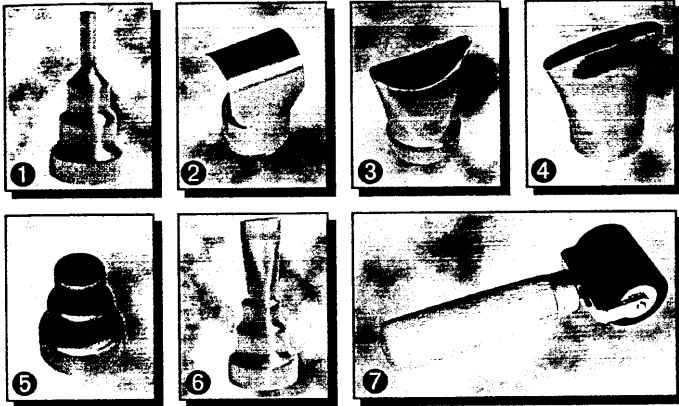

- ❶ Welding nozzle
- ❷ Reflector nozzle
- ❸ Glass protection nozzle
- ❹ Wide-slot nozzle
- ❺ Reduction nozzle Ø 20 mm
- ❻ Overlap welding nozzle
- ❼ Pressure roller

Power consumption 2000 W  
 Temperature range 80°C to 650°C  
 Weight 620 g




### Multi-functional hot air tool


- Intelligent terminal display
- Stand-by for eco drive
- Memory function
- The last select functions (function program) are immediately available again after switching the tool off and then on again.
- **7 Function programmes**



By operating the select key, the required user program with set values for temperature and airflow can be adjusted. As required, the operator can program these values himself within the set range for the program.

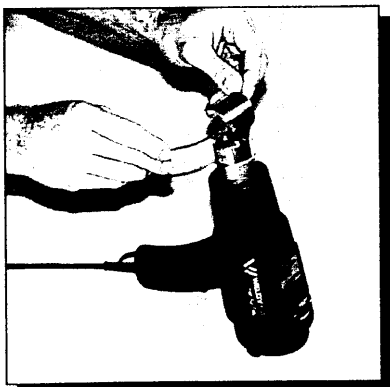

Shrinking

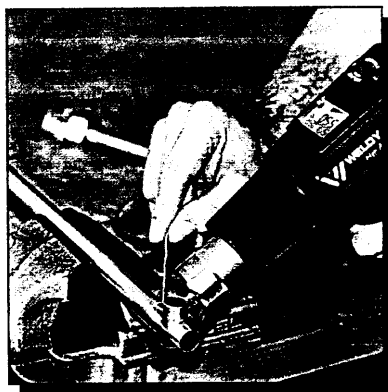

Soldering of copper pipes




Paint stripping



# Hot air tools made for professionals


## Accessories

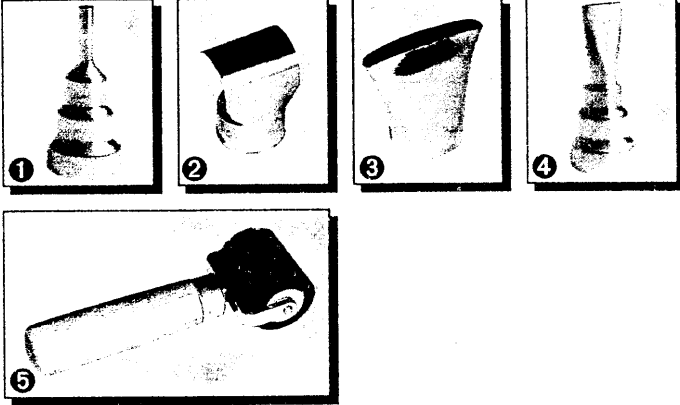

- ❶ Welding nozzle
- ❷ Reflector nozzle
- ❸ Wide-slot nozzle
- ❹ Overlap welding nozzle
- ❺ Pressure roller

## Multi-functional welding tool


- Intelligent terminal display
- Stand-by for eco drive
- Memory function
- 11 Function programmes for welding applications

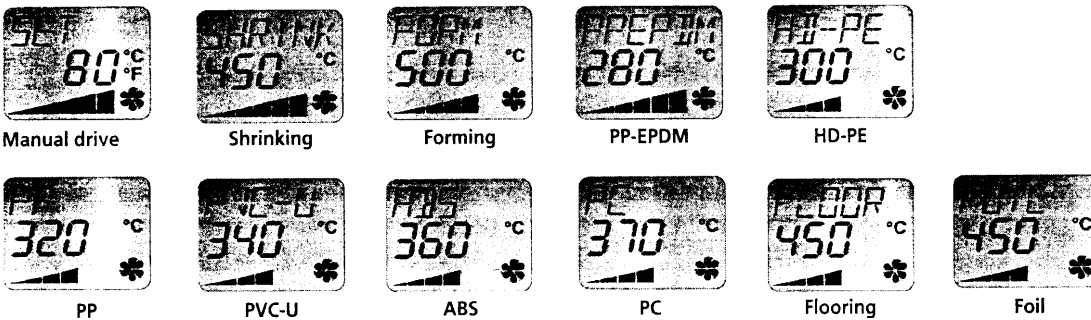

Power consumption 2000 W  
Temperature range 80°C to 650°C  
Weight 620 g



By operating the select key, the required user program with set values for temperature and airflow can be adjusted. As required, the operator can program these values himself within the set range for the program.

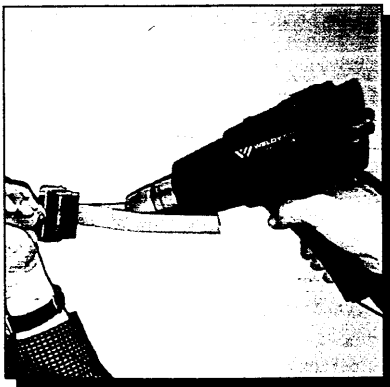

Welding foils



Repairing bumpers



Welding bitumen and roofing felt




Hot air tools

WELDY POWER

made for professionals

Accessories

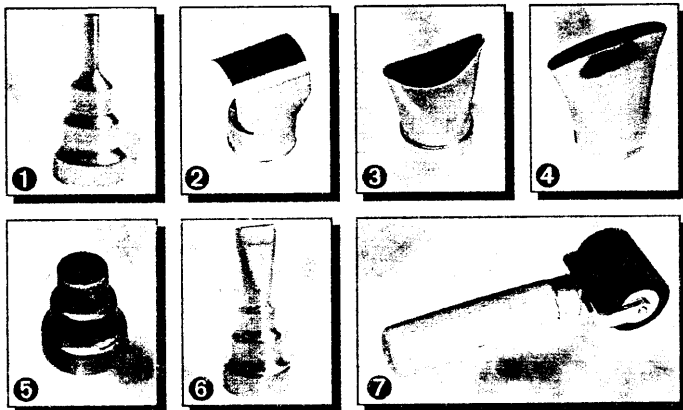

- ❶ Welding nozzle
- ❷ Reflector nozzle
- ❸ Glass protection nozzle
- ❹ Wide-slot nozzle
- ❺ Reduction nozzle Ø 20 mm
- ❻ Overlap welding nozzle
- ❼ Pressure roller

Power consumption 2300 W  
 Temperature range 80°C to 650°C  
 Weight 620 g




Multi-functional hot air tool

- Intelligent terminal display
- Stand-by for eco drive
- Memory function
- 11 Function programmes



Manual drive



Shrinking



Forming



Welding



Soldering




Edge-banding



Curing



Laboratory applications



Gluing




Loosening




Drying


By operating the select key, the required user program with set values for temperature and airflow can be adjusted. As required, the operator can program these values himself within the set range for the program.

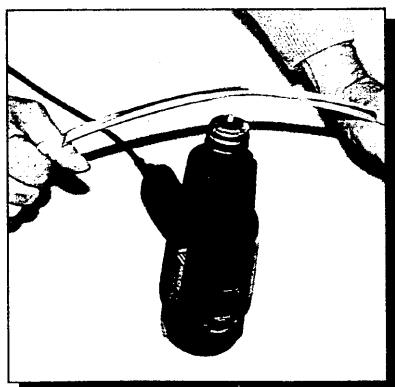

Forming

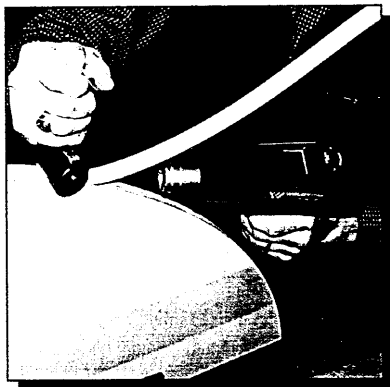

Edge-banding

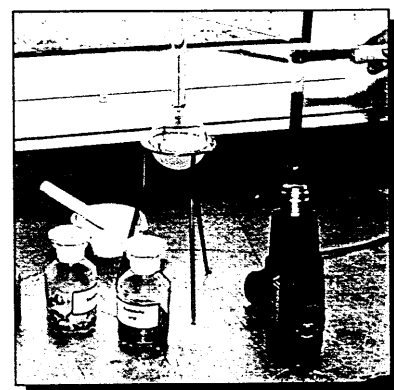

Laboratory applications




multi-functional hot air tools  
made for professionals

		<b>WELDY PRO</b>	<b>WELDY PLUS</b>	<b>WELDY PLAST</b>	<b>WELDY POWER</b>
Power consumption	W	1800	2000	2000	2300
Temperatur range	°C	100-550	80-650	80-650	80-650
Air flow	l/min.	250/550	200-550	200-550	200-600
Static pressure max.	Pa	1300	1200	1200	1200
Weight	g	570	620	620	620
LCD display			●	●	●
Electronics: Flicker conformity		●	●	●	●
Stand-by for Eco drive (lowest setting)			●	●	●
Memory function			●	●	●
7 Function programmes			●		
11 Function programmes				●	●
Air flow adjustment: Two-step switch		●			
Terminal with menu control			●	●	●
Heating element: Protected		●			
All ceramic, protected			●	●	●
<b>Function Programmes</b>					
<i>Temperature °C / Air Flow</i>					
Set/stepless adjustment	80-650 / 2-6		●	●	●
Shrink/shrinking	450 / 6		●	●	●
Form/forming	500 / 5		●	●	●
Weld/welding	350 / 4		●		●
Solder/soldering	550 / 4		●		●
Paint/paint stripping	425 / 6		●		
Dry/drying	550 / 6		●		
Edge/edge-banding	380 / 6				●
Cure/curing	400 / 4				●
Lab/laboratory application	425 / 5				●
Glue/gluing	450 / 4				●
Loose/loosening	600 / 6				●
Dry/drying	650 / 6				●
<b>Welding</b>					
PP-EPDM	280 / 6			●	
HD-PE	300 / 4			●	
PP	320 / 4			●	
PVC-U	340 / 4			●	
ABS	360 / 4			●	
PC	370 / 4			●	
Floor/welding of floorcoverings	450 / 4			●	
Foil/welding of foils	450 / 4			●	
<b>Accessories</b>					
Wide-slot nozzle		●	●	●	●
Reflector nozzle		●	●	●	●
Glas protection nozzle		●	●		●
Welding nozzle		●	●	●	●
Reduction nozzle Ø 20 mm		●	●		●
Overlap welding nozzle		●	●	●	●
Pressure roller		●	●	●	●

Preliminary data

SEV tested, CCA-certified



CE-Konform

EcoTool

Riedstrasse, CH-6060 Sarnen/Switzerland e-mail: ecotool@ecotool.com

LEISTER

Tel. +41-41-662 75 88 Fax +41-41-662 75 02 www.weldytool.com