



AMERICAN MICROSEMICONDUCTOR INC.

P. O. Box 104

Madison, New Jersey 07940 U. S. A.

<http://www.americanmicrosemi.com>

email:sales@americanmicrosemi.com

Phone: (973) 377-9566 Fax: (973) 377-3078

FEATURES

- 16 Diode Array
- Standard 14 pin Dual-In-Line Package
- UL 94V-0 Flammability Classification

MECHANICAL

- Molded 14 Pin Dip
- Weight: 2.5 grams (approximate)
- Marking: Logo, device number, date code
- Pin #1 defined by DOT on top of package

MAXIMUM RATINGS

- Operating Temperatures: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Forward Surge Current: 2.0Amps (8.3 mS)
- Peak Reverse voltage V_{RM} : 100V
- Steady state reverse voltage V_R : 75V
- Continuous forward current I_F : 400mA
- Power dissipation (P_D): 500mW
- Derating factor: 4.0 mW/°C

DataSheet4U.com


PACKAGING

- Carrier tubes 25 per standard

ELECTRICAL CHARACTERISTICS PER LINE

Characteristics @ 25 °C Unless otherwise specified

Part Number	$V_{br} @ I_{br}$ = 100 A V MIN	I_r +25°C A MAX	V @ V_r 20	I_r 150°C A MAX	V @ V_r 20	CAP @ 0 V pF MAX	trr (nS) MAX	V_f @ $I_f = 10mA$ V MAX	V_f @ $I_f = 100mA$ V MAX
ADA1103	100	.100	20	50	20	4.0	5.0	1.00	1.20

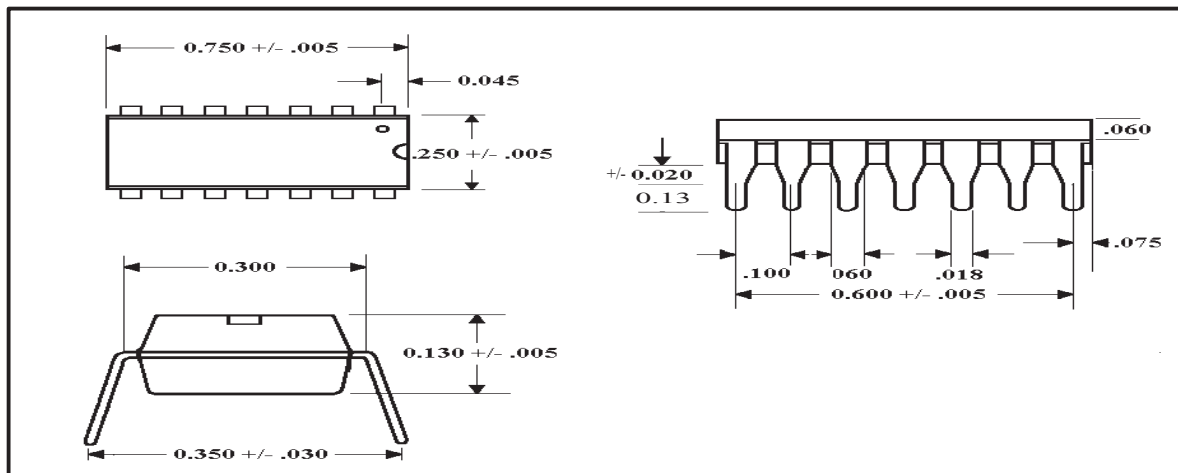


ADA1103

Switching Diode Array



CIRCUIT DIAGRAM

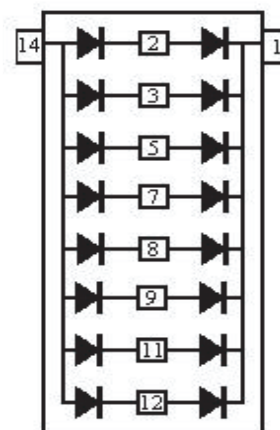

DataSheet4U.com