
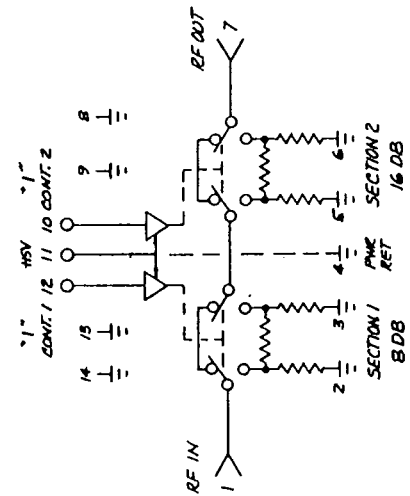
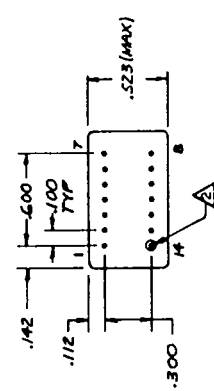


REVISIONS				
LTR	DESCRIPTION	BY	DATE	APPROVED
A	REVISED PER ECN Q28	cd/m	3-9-81	BBM
R	ECN 11528 (HT WAS -18)	TRD	11-10-81	BBM



13. DC POWER: +15 VOLTS AT 10 MA MAXIMUM
 12. ACCURACY: ±0.15 DB ±2% OF ATTENUATION SETTING
 11. RANGE: 0 - 24 DB ABOVE INSERTION LOSS
 10. STEPS: 8, 16 DB
 9. SWITCHING SPEED: 25 MICROSECONDS MAXIMUM
 8. CONTROL: 2 LINE CHOS, LOGIC "1" = THRU, "0" = ATTENUATION
 7. INSERTION LOSS: 2 DB MAXIMUM
 6. VSWR: 1.3/1 MAXIMUM
 5. IMPEDANCE: 50 OHMS
 4. RF POWER: +10 DBM MAXIMUM
 3. FREQUENCY: 250-460 MHZ
 2. PIN 14 IS INDICATED BY GLASS BEAD OF CONTRASTING COLOR
 1.  PART NUMBER IS DA0230
- NOTES: ALL SPECIFICATIONS ARE TYPICAL UNLESS OTHERWISE SPECIFIED

[illegible]