


180 Amp Schottky Rectifier

HS18035 – HS18045

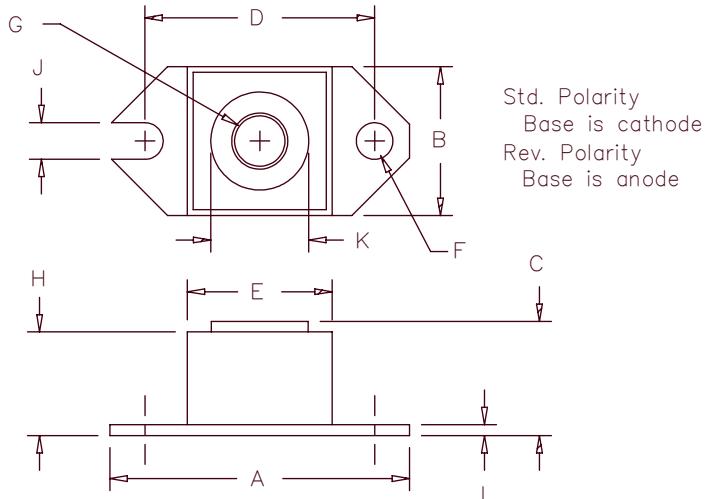

Dim.	Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	1.52	1.56	38.61	39.62	
B	.725	.775	18.42	19.69	
C	.605	.625	15.37	15.88	
D	1.182	1.192	30.02	30.28	
E	.745	.755	18.92	19.18	
F	.152	.160	3.86	4.06	Sq. Dia.
G			1/4-20 UNC-2B		
H	.525	.580	13.34	14.73	
J	.156	.160	3.96	4.06	
K	.495	.505	12.57	12.83	Dia.
L	.120	.130	3.05	3.30	

Microsemi Catalog Number	Industry Part Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
HS18035*	180NQ035 MBR20035		35V	35V
HS18040*	180NQ040 MBR20040		40V	40V
HS18045*	180NQ045 MBR20045		45V	45V

* Add Suffix R for Reverse Polarity

- Schottky Barrier Rectifier
- Guard Ring Protection
- 180 Amperes/35–45 Volts
- 150°C Junction Temperature
- Reverse Energy Tested
- ROHS Compliant

Electrical Characteristics

Average forward current
Maximum surge current
Maximum repetitive reverse current
Max peak forward voltage
Max peak forward voltage
Max peak reverse current
Max peak reverse current
Typical junction capacitance

$I_{F(AV)}$ 180 Amps
 I_{FSM} 3000 Amps
 $I_{R(OV)}$ 2 Amps
 V_{FM} 0.41 Volts
 V_{FM} 0.55 Volts
 I_{RM} 3.5 Amp
 I_{RM} 10mA
 C_J 7000pF

$T_C = 83^\circ\text{C}$, Square wave, $R_{\theta JC} = .32^\circ\text{C}/\text{W}$
8.3ms, half sine, $T_J = 150^\circ\text{C}$
 $f = 1 \text{ KHZ}, 25^\circ\text{C}$
 $|I_{FM}| = 180\text{A}; T_J = 125^\circ\text{C}^*$
 $|I_{FM}| = 180\text{A}; T_J = 25^\circ\text{C}^*$
 $V_{RRM}, T_J = 125^\circ\text{C}^*$
 $V_{RRM}, T_J = 25^\circ\text{C}$
 $V_R = 5.0\text{V}, T_C = 25^\circ\text{C}$

*Pulse test: Pulse width 300μsec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range
Operating junction temp range
Max thermal resistance
Typical thermal resistance (greased)
Terminal Torque
Mounting Base Torque
Weight

T_{STG}
 T_J
 $R_{\theta JC}$
 $R_{\theta CS}$

–55°C to 150°C
–55°C to 150°C
0.32°C/W Junction to case
0.12°C/W Case to sink
35–40 inch pounds
20–25 inch pounds
1.1 ounces (32 grams) typical

HS18035 – HS18045

Figure 1
Typical Forward Characteristics

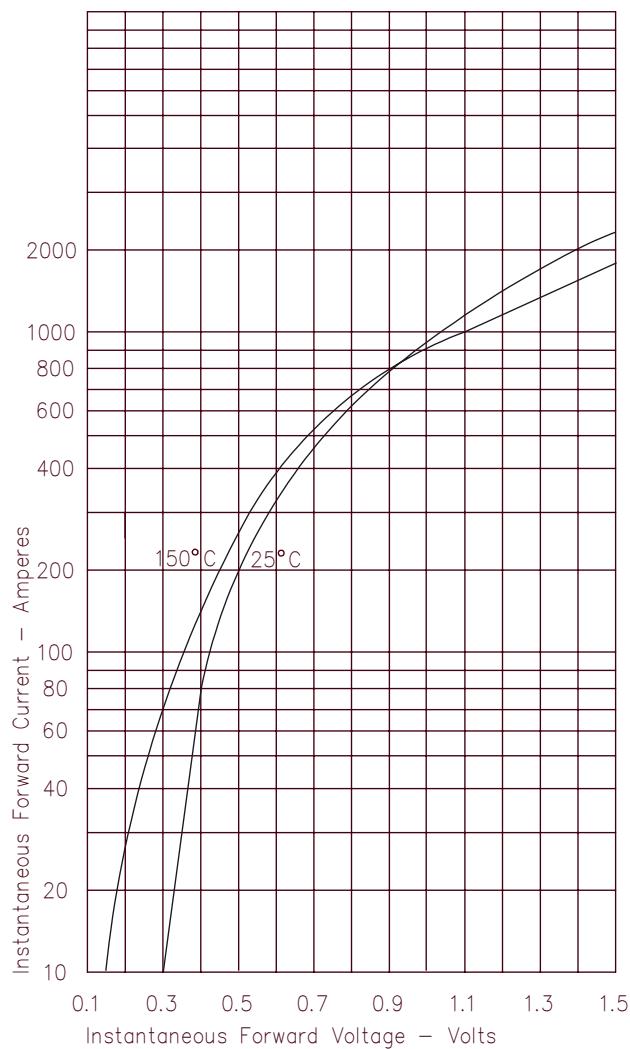


Figure 3
Typical Junction Capacitance

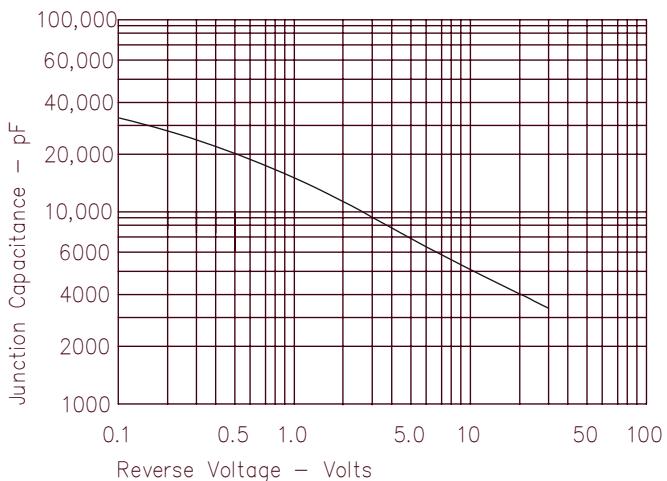


Figure 4
Forward Current Derating

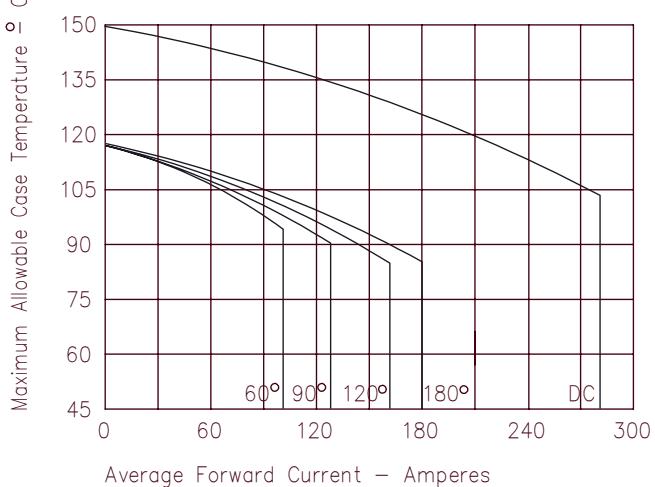


Figure 2
Typical Reverse Characteristics

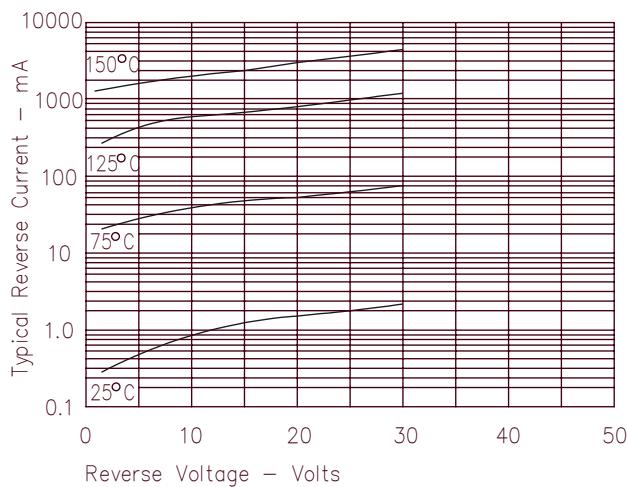


Figure 5
Maximum Forward Power Dissipation

