Blue Visible Emitter

MT4750C−UBL

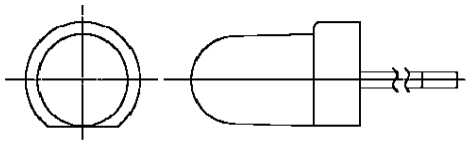

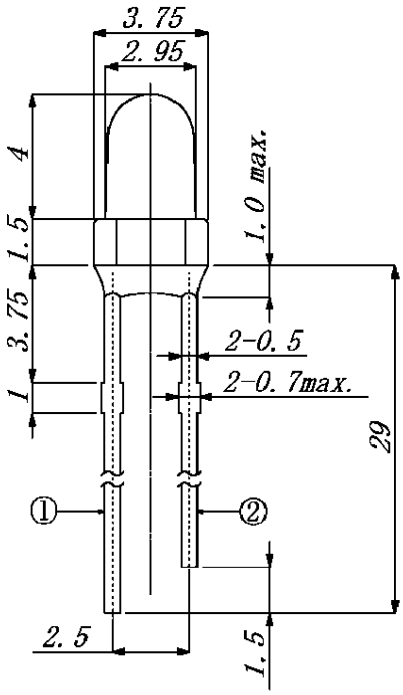

①Anode ② Cathode

Features

High Power Output
High Reliability

Applications

Optical Sensors
Fiber Optic Communications
Indicator

Maximum Ratings (Ta=25°C)

Characteristic	Symbol	Max.	Test Condition	Unit
Forward Current	I_F	25	−	mA
Pulsed Forward Current	I_{FP}	.10	tw=10μ S, T=10mS	A
Reverse Voltage	V_R	5	−	V
Power Dissipation	P_D	120.00	−	mW
Operating Temperature	T_{opr}	−20 ~ +80	−	°C
Storage Temperature	T_{stg}	−30 ~+100	−	°C
Junction Temperature	T_j	100	−	°C
Soldering Temperature	T_{sol}	260	for 5 sec. max	°C

Opto−Electrical Characteristics (Ta=25°C)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Forward Voltage	V_F	I_F=20mA	−	3.60	4.20	V
Reverse Current	I_R	V_R=5V	−	−	100	μA
Power Output	PO	I_F=20mA	−	6.00	−	mW
Half Intensity Beam Angle	θ	−	−	± 15°	−	deg.
Peak Wavelength	λp	I_F=20mA	−	465	−	nm
Dominant Wavelength	λd	I_F=20mA	−	470	−	nm
Spectral Line Half Width	Δλ	I_F=20mA	−	28	−	nm
Luminous Intensity	I_V	I_F=20mA	−	750.00	−	mcd

Company Headquarters
120 Broadway
Menands, New York 12204
Toll Free: 800.984.5337
Fax: 518.432.7454

Web: www.marktechopto.com | Email: info@marktechopto.com

West Coast Sales Office
950 South Coast Drive, Suite 265
Costa Mesa, California 92626
Toll Free: 800.984.5337
Fax: 714.850.9314

MT4750C−UBL Graphs

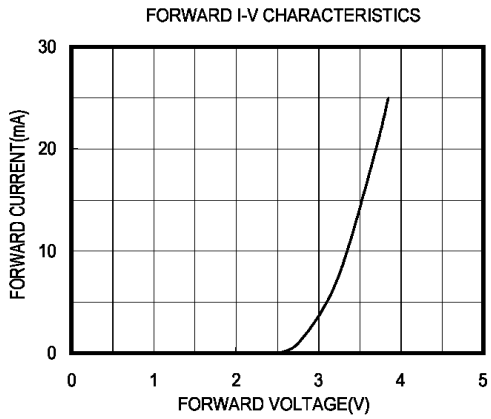

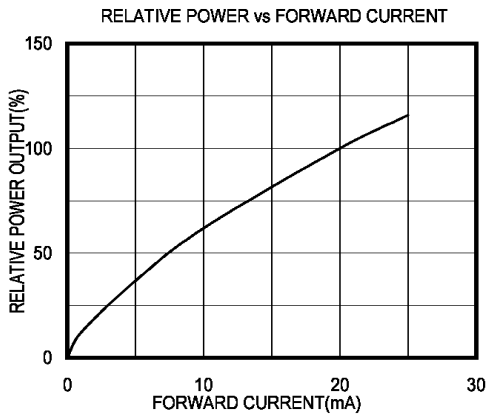

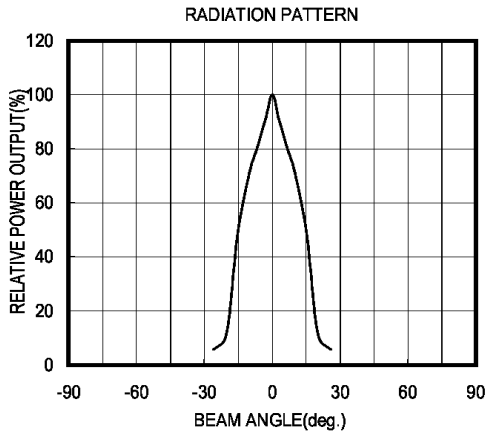

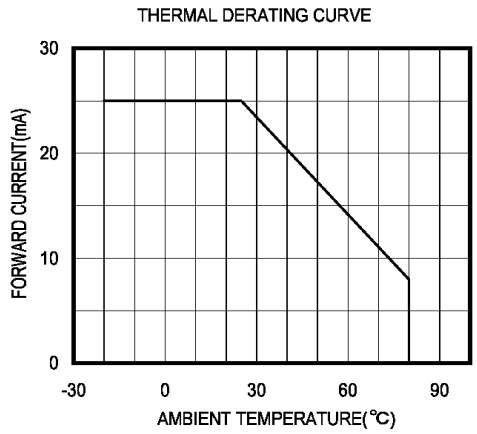

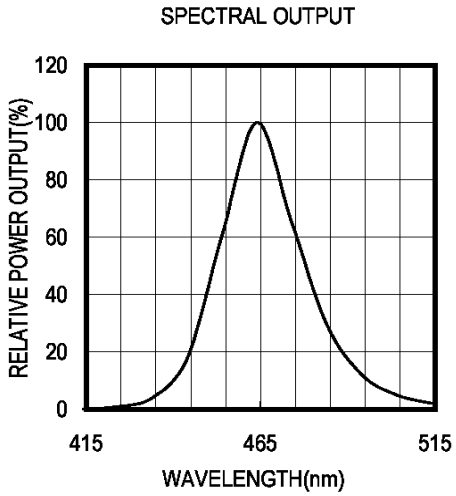

Company Headquarters
120 Broadway
Menands, New York 12204
Toll Free: 800.984.5337
Fax: 518.432.7454

Web: www.marktechopto.com | Email: info@marktechopto.com

West Coast Sales Office
950 South Coast Drive, Suite 265
Costa Mesa, California 92626
Toll Free: 800.984.5337
Fax: 714.850.9314