



The SUB range of compact, monitor-style loudspeakers provides the installer with a stylish solution to sound reinforcement in a variety of locations. These diminutive systems are both pleasing to the eye and unobtrusive.





The cabinets are manufactured from a structurally-loaded plastic material with excellent acoustic properties. The SUB-200 is fitted with a high quality full-range driver; the SUB-500 is a two-way reflex design with a more extended bass response. Both systems are ideal for music reproduction.

These products are available in both 8-ohm and 100 volt line versions and come complete with a swivel mounting bracket. Weatherproof options are available and the SUB-500 has Deluxe and Active options.


NEXTTM
2
TWO

Sound Solutions

	SUB-200	SUB-500
Dimensions H x W x D	155 x 157 x 152	155 x 260 x 162
Colour / finish	Black or White	Black or White
Mounting	Keyhole / Swivel bracket	Keyhole / Swivel bracket
Terminal	Spring loaded	Spring loaded
Net weight alone / with transformer, Kg	1.16 / 1.4	1.75 / 2.25
100 volt transformer power tapings, watts	2.0, 4.0, 7.5, 15.0	5.0, 7.5, 15.0, 30.0
Input impedance standard model, ohms	5k, 2.5k, 1.33k, 666	2k, 1.33k, 666, 333
Rated power, watts	15	30
Maximum power, RMS, watts	20	50
Dispersion at 1000 Hz, degrees° conical	110	95
Impedance, ohms	8	8
Effective frequency range, Hz	100 - 16,000	80 - 20,000
Sound pressure level, power watts / 1m, dB	101.7	104.7
Sound pressure level, 1 watt / 1m, dB	90	88

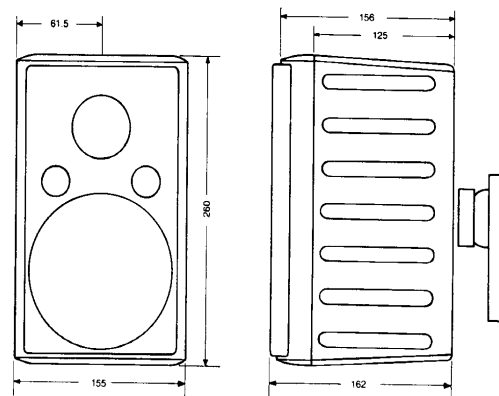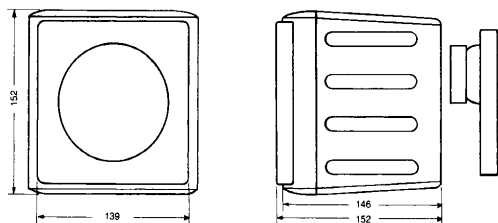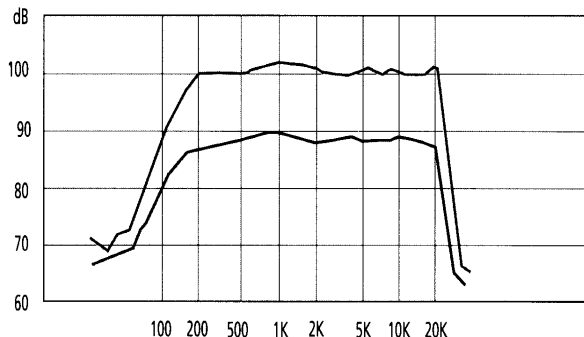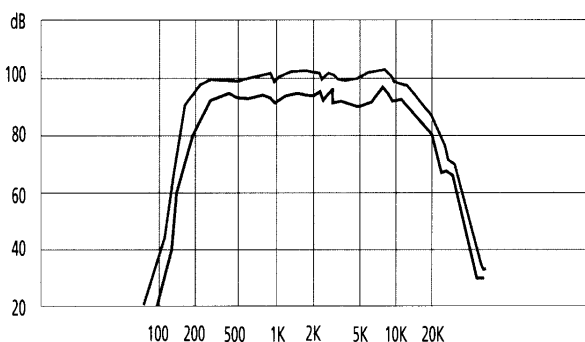

SUB-200



RED / YELLOW 15W
GREEN / BLUE 7.5W
YELLOW / GREEN 4W
RED / GREEN 2W

SUB-500



RED / YELLOW 30W
YELLOW / GREEN 15W
GREEN / BLUE 7.5W
RED / GREEN 5W

As loudspeaker specialists,
Next Two are committed to help you
fulfil your speaker requirements.
Your success guarantees ours.

Next Two Limited
Bellbrook Industrial Estate,
Uckfield, East Sussex TN22 1QL
Tel: +44 (0)1825 765478
Fax: +44 (0)1825 768746

e-mail: nexttwo@compuserve.com

NEXT
2
TWO