
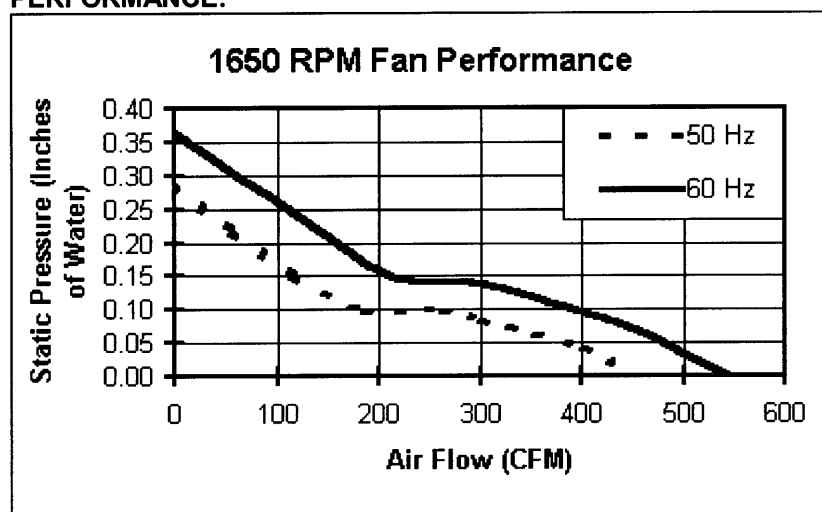


Caravel® AC**AC Tubeaxial Fan****FEATURES:**

- Size: 10.0" x 3.50" deep (254mm x 89mm)
- Air Flow: 550 CFM
- Voltage: 115 & 230 VAC (50/60 Hz)
- Operating Temperature Range: -10°C to +70°C
- Storage Temperature Range: -40°C to +85°C
- Ball Bearings
- 24" Leadwires or Terminals
- Weight: 4.4 Lbs. (2.0 Kg)

**PERFORMANCE:****SPECIFICATIONS:**

Model No.	Part No.	VAC	Watts	Running Current (Amps)	Locked Rotor Current (Amps)	RPM	CFM	dBA
CLE2T2	020189	115				1400/1650	455/550	45.4/49.2
CLE3T2	020191	230				1400/1650	455/550	45.4/49.2
CLE2L2	020188	115				1400/1650	455/550	45.4/49.2
CLE3L2	020190	230				1400/1650	455/550	45.4/49.2

[Click here to view diagram - CaravelAC.gif \(55K\)](#)

FEATURES:

1. Leadwires
2. Terminals
3. Ball Bearings
4. Sleeve Bearings
5. Tachometer Output
6. Thermal Speed Control
7. Programmable Speed Control

8. Fan Performance Sensor

MOTOR:

- Two-Pole Permanent Split Capacitor Motor, Single Phase
- Capacitor - Dry Polyester Film
- Insulation Class B
- Ball Bearings or Sleeve Bearings
- Impedance Protected
- 100% Dielectric Tested

CONSTRUCTION:

- Venturi - Single Piece Die Cast Aluminum, Black
- Propeller - Polycarbonate, Black, UL94V-0

LIFE EXPECTANCY:

- L10 Data - 55,000 hrs, @ 40°C

OPTIONS:

- Customized Harness Assemblies

 [Back to AC Axial Fans Menu](#)

[Home](#) | [Products](#) | [Competitor Cross-Reference Search](#) | [Product Data Sheet](#)
[Engineering Notes](#) | [Stock Check / Order](#) | [About Us](#) | [What's New](#) | [Contact Us](#)

*Copyright © 1997-2000, Comair Rotron
2675 Customhouse Court, San Diego, CA 92154-7619. All Rights Reserved*