



- OUTPUT CURRENT IN EXCESS OF 1A
- OUTPUT VOLTAGES OF 5; 6; 8; 12; 15; 18; 24V
- THERMAL OVERLOAD PROTECTION
- SHORT CIRCUIT PROTECTION
- OUTPUT TRANSISTOR SOA PROTECTION
- 2% OUTPUT VOLTAGE TOLERANCE
- GUARANTEED IN EXTENDED TEMPERATURE RANGES

DESCRIPTION

The L7800A series of three-terminal positive regulators is available in TO-220 and TO-3 packages and with several fixed output voltages, making it useful in a wide range of applications. These regulators can provide local on-card regulation, eliminating the distribution problems associated with single point regulation. Each type employs internal current limiting, thermal shut-down and safe area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 1A output current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltages and currents.




TO-3



TO-220

BLOCK DIAGRAM

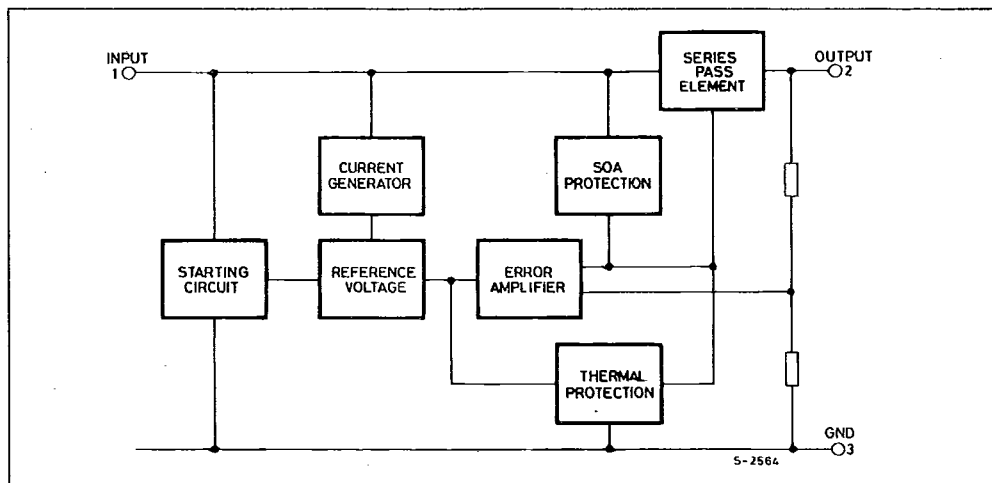


ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_i	DC Input Voltage (for $V_o = 5$ to 18V) (for $V_o = 24V$)	35 40	V V
I_o	Output Current	Internally limited	
P_{tot}	Power Dissipation	Internally limited	
T_j	Operating Junction Temperature for L7800AC for L7800AB	0 to 125 - 40 to 125	°C °C
T_{stg}	Storage Temperature	- 65 to + 150	°C

THERMAL DATA


Symbol	Parameter	TO-220	TO-3	Unit
$R_{th\ j-case}$	Thermal Resistance Junction-case Max	3	4	°C/W
$R_{th\ j-amb}$	Thermal Resistance Junction-ambient Max	50	35	°C/W

CONNECTION DIAGRAM AND ORDERING NUMBERS (top view)

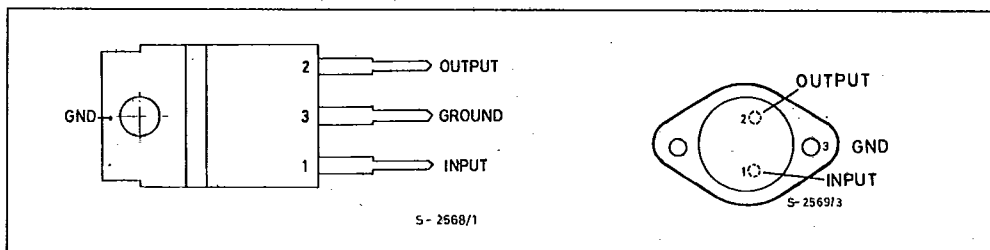

Ordering Numbers			Output Voltage
T _J = - 40 to 125°C	T _J = 0 to 125°C		
TO-220	TO-220	TO-3	
L7805ABV	L7805ACV	L7805ACT	5V
L7806ABV	L7806ACV	L7806ACT	6V
L7808ABV	L7808ACV	L7808ACT	8V
L7812ABV	L7812ACV	L7812ACT	12V
L7815ABV	L7815ACV	L7815ACT	15V
L7818ABV	L7818ACV	L7818ACT	18V
L7824ABV	L7824ACV	L7824ACT	24V


TYPICAL APPLICATION

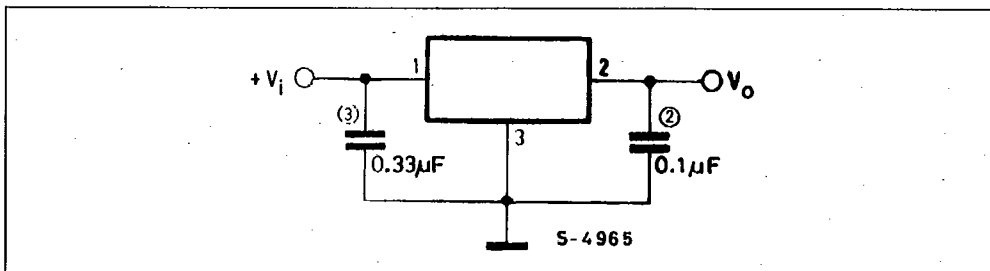

SCHEMATIC DIAGRAM

S G S-THOMSON

30E D

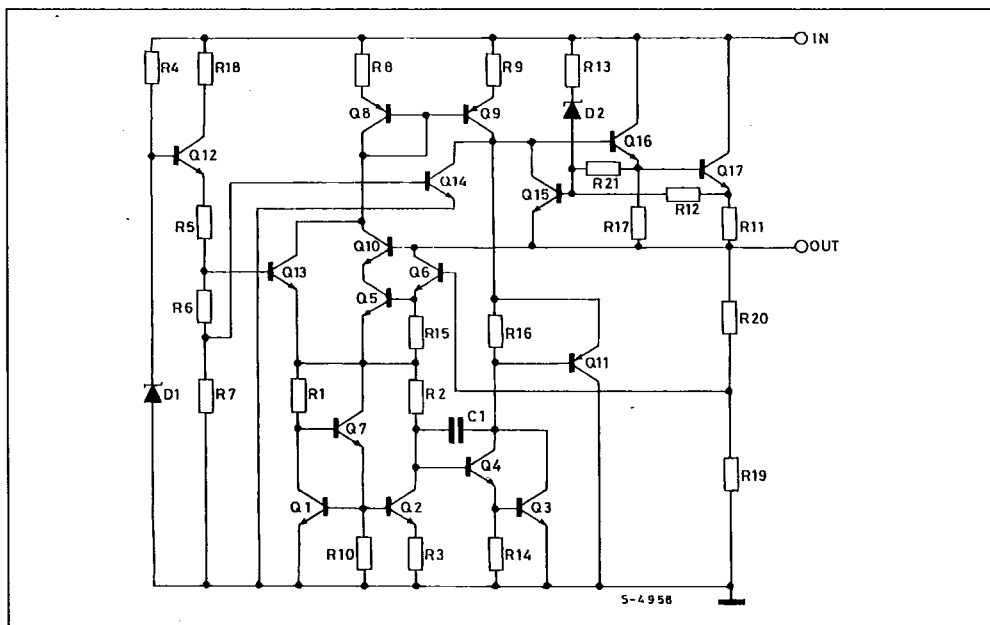

TEST CIRCUITS

Figure 1 : DC Parameters.

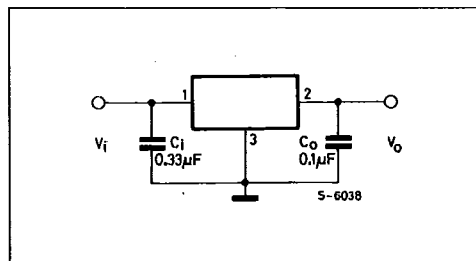


Figure 2 : Load Regulation.


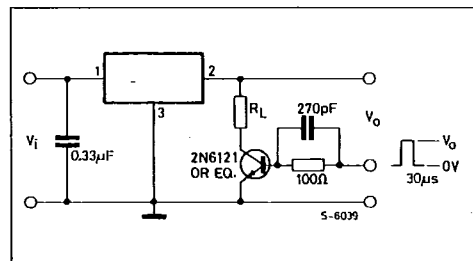


Figure 3 : Ripple Rejection.

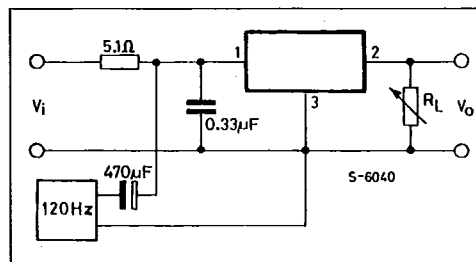

S G S-THOMSON

30E D

ELECTRICAL CHARACTERISTICS L7805A ($V_I = 10V$, $I_o = 1A$, $T_J = 0$ to $125^\circ C$ (L7805AC),
 $T_J = -40$ to $125^\circ C$ (L7805AB) unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	$T_J = 25^\circ C$	4.9	5	5.1	V
V_o	Output Voltage	$I_o = 5mA$ to $1A$, $P_o \leq 15W$ $V_I = 7.5$ to $20V$	4.8	5	5.2	V
ΔV_o^*	Line Regulation	$V_I = 7.5$ to $25V$, $I_o = 500mA$ $V_I = 8$ to $12V$		7 10	50 50	mV mV
		$V_I = 8$ to $12V$, $T_J = 25^\circ C$ $V_I = 7.3$ to $20V$, $T_J = 25^\circ C$		2 7	25 50	mV mV
ΔV_o^*	Load Regulation	$I_o = 5mA$ to $1A$		25	100	mV
		$I_o = 5mA$ to $1.5A$, $T_J = 25^\circ C$		25	100	mV
		$I_o = 250$ to $750mA$		8	50	mV
I_d	Quiescent Current	$T_J = 25^\circ C$		4.3	6 6	mA mA
ΔI_d	Quiescent Current Change	$V_I = 8$ to $25V$, $I_o = 500mA$ $V_I = 7.5$ to $20V$, $T_J = 25^\circ C$ $I_o = 5mA$ to $1A$			0.8 0.8 0.5	mA mA mA
SVR	Supply Voltage Rejection	$V_I = 8$ to $18V$, $f = 120Hz$ $I_o = 500mA$		68		dB
V_d	Dropout Voltage	$I_o = 1A$, $T_J = 25^\circ C$		2		V
e_N	Output Noise Voltage	$f = 10Hz$ to $100KHz$, $T_J = 25^\circ C$		10		$\mu V/V_o$
R_o	Output Resistance	$f = 1KHz$		17		$m\Omega$
I_{sc}	Short Circuit Current	$T_{amb} = 25^\circ C$, $V_I = 35V$		0.2		A
I_{sop}	Short Circuit Peak Current	$T_J = 25^\circ C$		2.2		A
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift			- 1.1		$mV/^\circ C$

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

SGS-THOMSON

30E D

ELECTRICAL CHARACTERISTICS L7806A ($V_i = 11V$, $I_o = 1A$, $T_j = 0$ to $125^\circ C$ (L7806AC),
 $T_j = -40$ to $125^\circ C$ (L7806AB) ; unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	$T_j = 25^\circ C$	5.88	6	6.12	V
V_o	Output Voltage	$I_o = 5mA$ to $1A$, $P_o \leq 15W$ $V_i = 8.6$ to $21V$	5.76	6	6.24	V
ΔV_o^*	Line Regulation	$V_i = 8.6$ to $25V$, $I_o = 500mA$		9	60	mV
		$V_i = 9$ to $13V$		11	60	mV
		$V_i = 9$ to $13V$, $T_j = 25^\circ C$		3	30	mV
		$V_i = 8.3$ to $21V$, $T_j = 25^\circ C$		9	60	mV
ΔV_o^*	Load Regulation	$I_o = 5mA$ to $1A$		43	100	mV
		$I_o = 5mA$ to $1.5A$, $T_j = 25^\circ C$		43	100	mV
		$I_o = 250$ to $750mA$		16	50	mV
I_d	Quiescent Current	$T_j = 25^\circ C$		4.3	6	mA
					6	mA
ΔI_d	Quiescent Current Change	$V_i = 9$ to $25V$, $I_o = 500mA$			0.8	mA
		$V_i = 8.6$ to $21V$, $T_j = 25^\circ C$			0.8	mA
		$I_o = 5mA$ to $1A$			0.5	mA
SVR	Supply Voltage Rejection	$V_i = 9$ to $19V$, $f = 120Hz$ $I_o = 500mA$		65		dB
V_d	Dropout Voltage	$I_o = 1A$ $T_j = 25^\circ C$		2		V
e_N	Output Noise Voltage	$T_j = 25^\circ C$, $f = 10Hz$ to $100KHz$		10		$\mu V/V_o$
R_o	Output Resistance	$f = 1KHz$		17		$m\Omega$
I_{sc}	Short Circuit Current	$T_{amb} = 25^\circ C$ $V_i = 35V$		0.2		A
I_{scp}	Short Circuit Peak Current	$T_j = 25^\circ C$		2.2		A
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift			- 0.8		$mV/^\circ C$

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

ELECTRICAL CHARACTERISTICS L7808A ($V_I = 14V$, $I_o = 1A$, $T_J = 0$ to $125^\circ C$ (L7808AC),
 $T_J = -40$ to $125^\circ C$ (L7808AB), unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	$T_J = 25^\circ C$	7.84	8	8.16	V
V_o	Output Voltage	$I_o = 5mA$ to $1A$, $P_o \leq 15W$ $V_I = 10.6$ to $23V$	7.7	8	8.3	V
ΔV_o^*	Line Regulation	$V_I = 10.6$ to $25V$, $I_o = 500mA$ $V_I = 11$ to $17V$		12 15	80 80	mV mV
		$V_I = 11$ to $17V$, $T_J = 25^\circ C$ $V_I = 10.4$ to $23V$, $T_J = 25^\circ C$		5 12	40 80	mV mV
ΔV_o^*	Load Regulation	$I_o = 5mA$ to $1A$		45	100	mV
		$I_o = 5mA$ to $1.5A$, $T_J = 25^\circ C$		45	100	mV
		$I_o = 250$ to $750mA$		16	50	mV
I_d	Quiescent Current	$T_J = 25^\circ C$		4.3	6 6	mA mA
ΔI_d	Quiescent Current Change	$V_I = 11$ to $25V$, $I_o = 500mA$ $V_I = 10.6$ to $23V$, $T_J = 25^\circ C$ $I_o = 5mA$ to $1A$			0.8 0.8 0.5	mA mA mA
SVR	Supply Voltage Rejection	$V_I = 11.5$ to $21.5V$, $f = 120Hz$ $I_o = 500mA$		62		dB
V_d	Dropout Voltage	$I_o = 1A$, $T_J = 25^\circ C$		2		V
e_N	Output Noise Voltage	$T_J = 25^\circ C$, $f = 10Hz$ to $100KHz$		10		$\mu V/V_o$
R_o	Output Resistance	$f = 1KHz$		18		$m\Omega$
I_{sc}	Short Circuit Current	$T_{amb} = 25^\circ C$, $V_I = 35V$		0.2		A
I_{sop}	Short Circuit Peak Current	$T_J = 25^\circ C$		2.2		A
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift			- 0.8		$mV/^\circ C$

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

S G S-THOMSON

30E D

ELECTRICAL CHARACTERISTICS L7812A ($V_i = 19V$, $I_o = 1A$, $T_j = 0$ to $125^\circ C$ (L7812AC),
 $T_j = -40$ to $125^\circ C$ (L7812AB), unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	$T_j = 25^\circ C$	11.75	12	12.25	V
V_o	Output Voltage	$I_o = 5mA$ to $1A$, $P_o \leq 15W$ $V_i = 14.8$ to $27V$	11.5	12	12.5	V
ΔV_o^*	Line Regulation	$V_i = 14.8$ to $30V$, $I_o = 500mA$ $V_i = 16$ to $22V$		13 16	120 120	mV mV
		$V_i = 16$ to $22V$, $T_j = 25^\circ C$ $V_i = 14.5$ to $27V$, $T_j = 25^\circ C$		6 13	60 120	mV mV
ΔV_o^*	Load Regulation	$I_o = 5mA$ to $1A$ $I_o = 5mA$ to $1.5A$, $T_j = 25^\circ C$ $I_o = 250$ to $750mA$		46 46 17	100 100 50	mV mV mV
I_d	Quiescent Current	$T_j = 25^\circ C$		4.4	6 6	mA mA
ΔI_d	Quiescent Current Change	$V_i = 15$ to $30V$, $I_o = 500mA$ $V_i = 14.8$ to $27V$, $T_j = 25^\circ C$ $I_o = 5mA$ to $1A$			0.8 0.8 0.5	mA mA mA
SVR	Supply Voltage Rejection	$V_i = 15$ to $25V$, $f = 120Hz$ $I_o = 500mA$		60		dB
V_d	Dropout Voltage	$I_o = 1A$, $T_j = 25^\circ C$		2		V
e_N	Output Noise Voltage	$T_j = 25^\circ C$, $f = 10Hz$ to $100KHz$		10		$\mu V/V_o$
R_o	Output Resistance	$f = 1KHz$		18		$m\Omega$
I_{sc}	Short Circuit Current	$T_{amb} = 25^\circ C$, $V_i = 35V$		0.2		A
I_{sop}	Short Circuit Peak Current	$T_j = 25^\circ C$		2.2		A
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift			-1		$mV/^\circ C$

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

S G S-THOMSON

3QE D

ELECTRICAL CHARACTERISTICS L7815A ($V_i = 23V$, $I_o = 1A$, $T_j = 0$ to $125^\circ C$ (L7815AC),
 $T_j = -40$ to $125^\circ C$ (L7815AB), unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	$T_j = 25^\circ C$	14.7	15	15.3	V
V_o	Output Voltage	$I_o = 5mA$ to $1A$, $P_o \leq 15W$ $V_i = 17.9$ to $30V$	14.4	15	15.6	V
ΔV_o^*	Line Regulation	$V_i = 17.9$ to $30V$, $I_o = 500mA$ $V_i = 20$ to $26V$		13 16	150 150	mV mV
		$V_i = 20$ to $26V$, $T_j = 25^\circ C$ $V_i = 17.5$ to $30V$, $T_j = 25^\circ C$		6 13	75 150	mV mV
ΔV_o^*	Load Regulation	$I_o = 5mA$ to $1A$		52	100	mV
		$I_o = 5mA$ to $1.5A$, $T_j = 25^\circ C$		52	100	mV
		$I_o = 250$ to $750mA$		20	50	mV
I_d	Quiescent Current	$T_j = 25^\circ C$		4.4	6 6	mA mA
ΔI_d	Quiescent Current Change	$V_i = 17.5$ to $30V$, $I_o = 500mA$ $V_i = 17.5$ to $30V$, $T_j = 25^\circ C$ $I_o = 5mA$ to $1A$			0.8 0.8 0.5	mA mA mA
SVR	Supply Voltage Rejection	$V_i = 18.5$ to $28.5V$, $f = 120Hz$ $I_o = 500mA$		58		dB
V_d	Dropout Voltage	$I_o = 1A$, $T_j = 25^\circ C$		2		V
e_N	Output Noise Voltage	$T_j = 25^\circ C$, $f = 10Hz$ to $100KHz$		10		$\mu V/V_o$
R_o	Output Resistance	$f = 1KHz$		19		$m\Omega$
I_{sc}	Short Circuit Current	$T_{amb} = 25^\circ C$, $V_i = 35V$		0.2		A
I_{scp}	Short Circuit Peak Current	$T_j = 25^\circ C$		2.2		A
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift			-1		$mV/^\circ C$

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

S G S-THOMSON

30E D

L7800AB/AC SERIES

ELECTRICAL CHARACTERISTICS L7818A ($V_i = 27V$, $I_o = 1A$, $T_j = 0$ to $125^\circ C$ (L7818AC), $T_j = -40$ to $125^\circ C$ (L7818AB), unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	$T_j = 25^\circ C$	17.64	18	18.36	V
V_o	Output Voltage	$I_o = 5mA$ to $1A$, $P_o \leq 15W$ $V_i = 21$ to $33V$	17.3	18	18.7	V
ΔV_o^*	Line Regulation	$V_i = 21$ to $33V$, $I_o = 500mA$		25	180	mV
		$V_i = 24$ to $30V$		28	180	mV
		$V_i = 24$ to $30V$, $T_j = 25^\circ C$		10	90	mV
		$V_i = 20.6$ to $33V$, $T_j = 25^\circ C$		25	180	mV
ΔV_o^*	Load Regulation	$I_o = 5mA$ to $1A$		55	100	mV
		$I_o = 5mA$ to $1.5A$, $T_j = 25^\circ C$		55	100	mV
		$I_o = 250$ to $750mA$		22	50	mV
I_d	Quiescent Current	$T_j = 25^\circ C$		4.5	6	mA
					6	mA
ΔI_d	Quiescent Current Change	$V_i = 21$ to $33V$, $I_o = 500mA$			0.8	mA
		$V_i = 21$ to $33V$, $T_j = 25^\circ C$			0.8	mA
		$I_o = 5mA$ to $1A$			0.5	mA
SVR	Supply Voltage Rejection	$V_i = 22$ to $32V$, $f = 120Hz$ $I_o = 500mA$		57		dB
V_d	Dropout Voltage	$I_o = 1A$, $T_j = 25^\circ C$		2		V
e_N	Output Noise Voltage	$T_j = 25^\circ C$, $f = 10Hz$ to $100KHz$		10		$\mu V/V_o$
R_o	Output Resistance	$f = 1KHz$		19		m Ω
I_{sc}	Short Circuit Current	$T_{amb} = 25^\circ C$, $V_i = 35V$		0.2		A
I_{scp}	Short Circuit Peak Current	$T_j = 25^\circ C$		2.2		A
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift			-1		mV/ $^\circ C$

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

ELECTRICAL CHARACTERISTICS L7824A ($V_I = 33V$, $I_o = 1A$, $T_J = 0$ to $125^\circ C$ (L7824AC), $T_J = -40$ to $125^\circ C$ (L7824AB), unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	$T_J = 25^\circ C$	23.5	24	24.5	V
V_o	Output Voltage	$I_o = 5mA$ to $1A$, $P_o \leq 15W$ $V_I = 27.3$ to $38V$	23	24	25	V
ΔV_o^*	Line Regulation	$V_I = 27$ to $38V$, $I_o = 500mA$ $V_I = 30$ to $36V$		31 35	240 240	mV mV
		$V_I = 30$ to $36V$, $T_J = 25^\circ C$ $V_I = 26.7$ to $38V$, $T_J = 25^\circ C$		14 31	120 240	mV mV
ΔV_o^*	Load Regulation	$I_o = 5mA$ to $1A$		60	100	mV
		$I_o = 5mA$ to $1.5A$, $T_J = 25^\circ C$		60	100	mV
		$I_o = 250$ to $750mA$		25	50	mV
I_d	Quiescent Current	$T_J = 25^\circ C$		4.6	6 6	mA mA
ΔI_d	Quiescent Current Change	$V_I = 27.3$ to $38V$, $I_o = 500mA$			0.8	mA
		$V_I = 27.3$ to $38V$, $T_J = 25^\circ C$			0.8	mA
		$I_o = 5mA$ to $1A$			0.5	mA
SVR	Supply Voltage Rejection	$V_I = 28$ to $38V$, $f = 120Hz$ $I_o = 500mA$		54		dB
V_d	Dropout Voltage	$I_o = 1A$, $T_J = 25^\circ C$		2		V
e_N	Output Noise Voltage	$T_J = 25^\circ C$, $f = 10Hz$ to $100KHz$		10		$\mu V/V_o$
R_o	Output Resistance	$f = 1KHz$		20		$m\Omega$
I_{sc}	Short Circuit Current	$T_{amb} = 25^\circ C$, $V_I = 35V$		0.2		A
I_{scp}	Short Circuit Peak Current	$T_J = 25^\circ C$		2.2		A
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift			- 1.5		$mV/^\circ C$

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

APPLICATIONS INFORMATION

DESIGN CONSIDERATIONS

The L7800A Series of fixed voltage regulators are designed with Thermal Overload Protection that shuts down the circuit when subjected to an excessive power overload condition, Internal Short-circuit Protection that limits the maximum current the circuit will pass, and Output Transistor Safe-Area Compensation that reduces the output short-circuit current as the voltage across the pass transistor is increased.

In many low current applications, compensation capacitors are not required. However, it is recommended that the regulator input be bypassed with a

capacitor if the regulator is connected to the power supply filter with long wire lengths, or if the output load capacitance is large. An input bypass capacitor should be selected to provide good high-frequency characteristics to insure stable operation under all load conditions. A $0.33\mu\text{F}$ or larger tantalum, mylar, or other capacitor having low internal impedance at high frequencies should be chosen. The bypass capacitor should be mounted with the shortest possible leads directly across the regulators input terminals. Normally good construction techniques should be used to minimize ground loops and lead resistance drops since the regulator has no external sense lead.

Figure 4 : Current Regulator.

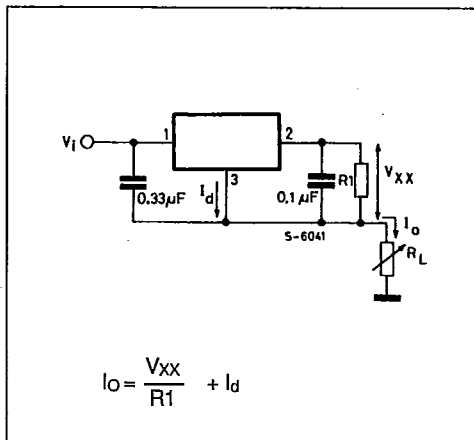


Figure 6 : Current Boost Regulator.



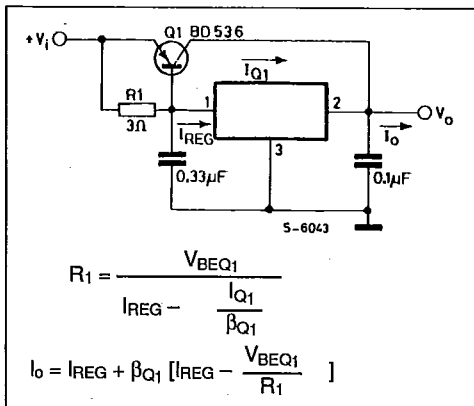


Figure 5 : Adjustable Output Regulator.

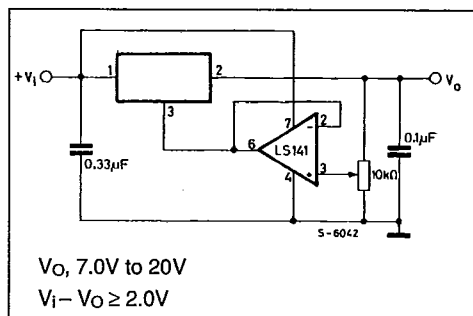

The addition of an operational amplifier allows adjustment to higher or intermediate values while retaining regulation characteristics. The minimum voltage obtainable with this arrangement is 2.0V greater than the regulator voltage.

Figure 7 : Short-circuit Protection.

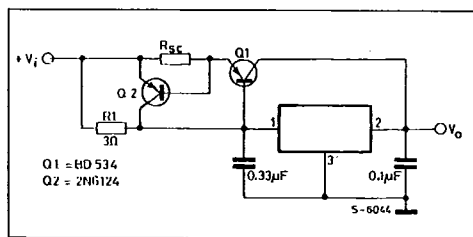

The circuit of figure 6 can be modified to provide supply protection against short circuit by adding a short-circuit sense resistor, R_{SC} , and an additional PNP transistor. The current sensing PNP must be able to handle the short-circuit current of the three-terminal regulator. Therefore, a four-ampere plastic power transistor is specified.