

High efficiency, single-digit numeric displays


LA-401 DN Series

The LA-401 DN series were designed to meet the need for small single-digit numeric displays. These LED numeric displays use GaAsP on GaP for the emitting material (with the exception of green) and are housed in an epoxy resin package. They are single-digit displays with a character height of 10.16 mm.

●Features

- 1) Height of character : 10.16 mm.
- 2) Common anode and common cathode configurations are available for each color.
- 3) Each segment has independent pin connections and static drive is possible.
- 4) High-efficiency reflectors are used to achieve a bright, clear display.
- 5) The package surface is coated black and the segments are colored the display color.


●External dimensions (Unit: mm)

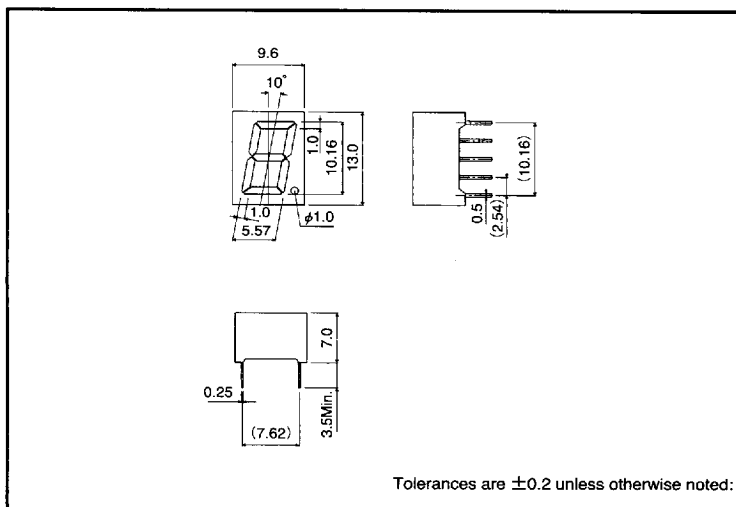

●Selection guide

Emitting color	Red	Orange	Yellow	Green
Common				
Anode	LA-401VD	LA-401DD	LA-401YD	LA-401MD
Cathode	LA-401VN	LA-401DN	LA-401YN	LA-401MN

●Pin layout




Pin No.	Function
1	Common
2	Segment "f"
3	Segment "g"
4	Segment "e"
5	Segment "d"
6	Common
7	D.P.
8	Segment "c"
9	Segment "b"
10	Segment "a"

7828999 0016396 045

ROHM

189

● Internal circuit schematic (example of common anode)



● Absolute maximum ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Red	Orange	Yellow	Green	Unit
		LA-401VD/VN	LA-401DD/DN	LA-401YD/YN	LA-401MD/MN	
Power dissipation	P_D	320	320	320	480	mW
Power dissipation	P_D/seg	40	40	40	60	mW
Forward current	I_F	15	15	15	20	mA
Peak forward current	I_{FP}	60*	60*	60*	60*	mA
Reverse voltage	V_R	3	3	3	3	V
Operating temperature	T_{opr}	$-25 \sim 75$				$^\circ\text{C}$
Storage temperature	T_{stg}	$-30 \sim 85$				$^\circ\text{C}$

* Pulse width 1ms Duty 1/5

● Electrical and optical characteristics ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Conditions	Red			Orange			Yellow			Green			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
Forward voltage	V_F	$I_F = 10\text{mA}$	—	2.0	2.8	—	2.0	2.8	—	2.1	2.8	—	2.1	2.8	V
Reverse current	I_R	$V_R = 3\text{V}$	—	—	100	—	—	100	—	—	100	—	—	100	μA
Peak wavelength	λ_P	$I_F = 10\text{mA}$	—	650	—	—	610	—	—	585	—	—	563	—	nm
Spectral line half width	$\Delta\lambda$	$I_F = 10\text{mA}$	—	40	—	—	40	—	—	40	—	—	40	—	nm

* Not designed for radiation resistance.

● Luminous intensity

Color	λ_P	Type	Min.	Typ.	Max.	Unit
Red	650	LA-401VD	5.6	16	—	mcd
		LA-401VN				
Orange	610	LA-401DD	3.6	10	—	mcd
		LA-401DN				
Yellow	585	LA-401YD	3.6*	10	—	mcd
		LA-401YN				
Green	563	LA-401MD	5.6	16	—	mcd
		LA-401MN				

Note: Measured at $I_F = 10\text{mA}$

7828999 0016397 T81